


Wire Shelves



Split Sleeve

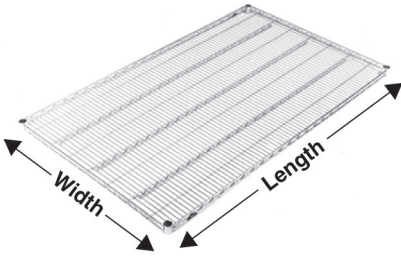

Aluminum Split Sleeve

- **Metroseal 3:** Metro's proprietary epoxy coating contains Microban® antimicrobial product protection. Microban antimicrobial protects the epoxy coating from bacteria, mold, mildew, and fungus that cause odors, stains, and product degradation.
- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf
Replacements are available: Cat. No. 9985 (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications and autoclave applications.
Cat. No. 9986Z (bag of 4 with zinc C-rings)
Cat. No. 9986S (bag of 4 with stainless steel C-rings)
- Load capacity (evenly distributed) per shelf
Depths: 14" to 24" (355 to 610mm)
800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)
600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Load capacity (evenly distributed) per unit.
Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg)
Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings
- SUPER ERECTA SHELF meets Government Specifications MIL-S-40144E.

Model No. Super Erecta Brite	Model No. Chrome	Model No. Metroseal 3 with Microban®	Model No. Stainless	Nominal Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
1424BR	1424NC	1424NK3	1424NS	14x24	355x610	6	2.7
1430 BR	1430NC	1430NK3	1430NS	14x30	355x760	7	3.2
1436BR	1436NC	1436NK3	1436NS	14x36	355x914	8	3.6
1442BR	1442NC	1442NK3	1442NS	14x42	355x1066	9½	4.3
1448BR	1448NC	1448NK3	1448NS	14x48	355x1219	10½	4.7
1460BR	1460NC	1460NK3	1460NS	14x60	355x1524	14	6.3
1472BR	1472NC	1472NK3	1472NS	14x72	355x1829	17	7.7
1824BR	1824NC	1824NK3	1824NS	18x24	457x610	7	3.2
1830BR	1830NC	1830NK3	1830NS	18x30	457x760	8	3.6
1836BR	1836NC	1836NK3	1836NS	18x36	457x914	9½	4.3
1842BR	1842NC	1842NK3	1842NS	18x42	457x1066	11	5.0
1848BR	1848NC	1848NK3	1848NS	18x48	457x1219	12	5.4
1854BR	1854NC	1854NK3	1854NS	18x54	457x1370	14½	6.6
1860BR	1860NC	1860NK3	1860NS	18x60	457x1524	17	7.7
1872BR	1872NC	1872NK3	1872NS	18x72	457x1829	20	9.1
2124BR	2124NC	2124NK3	2124NS	21x24	530x610	8	3.6
2130BR	2130NC	2130NK3	2130NS	21x30	530x760	9	4.1
2136BR	2136NC	2136NK3	2136NS	21x36	530x914	11	5.0
2142BR	2142NC	2142NK3	2142NS	21x42	530x1066	12	5.4
2148BR	2148NC	2148NK3	2148NS	21x48	530x1219	14	6.4
2154BR	2154NC	2154NK3	2154NS	21x54	530x1370	16	7.3
2160BR	2160NC	2160NK3	2160NS	21x60	530x1524	18	8.2
2172BR	2172NC	2172NK3	2172NS	21x72	530x1829	24	10.9
2424BR	2424NC	2424NK3	2424NS	24x24	610x610	9	4.1
2430BR	2430NC	2430NK3	2430NS	24x30	610x760	11	5.0
2436BR	2436NC	2436NK3	2436NS	24x36	610x914	13	5.9
2442BR	2442NC	2442NK3	2442NS	24x42	610x1066	15	6.8
2448BR	2448NC	2448NK3	2448NS	24x48	610x1219	16	7.3
2454BR	2454NC	2454NK3	2454NS	24x54	610x1370	19	8.6
2460BR	2460NC	2460NK3	2460NS	24x60	610x1524	21	9.5
2472BR	2472NC	2472NK3	2472NS	24x72	610x1829	26	11.8

Note: 14" (355mm) deep units.
Free-standing units: Foot plates should be used and secured to the floor.
Mobile units: maximum allowable post height is 54" (1370mm).