

FE SERIES - FABRICATED SINKS



Approx.

One & Two Compartments

Bowl

Drbd. Length



Rolled Rim Edge For Additional Strength

Width

Bowl Size

Length

ltem #:	Qty #:
Model #:	
Project #:	

of

Drbrd.



K-700 Removable Side Splashes Fits Left OR Right Side

MODEL# Wt. W A & B Depth Size Drbrds. Location Cubes FE-1-1515-X 20" 20 3/4" 12" N/A 0 None 38 lbs. 11 15"x15" 14" R&L FE-1-1514-15RLX 45" 20 3/4" N/A 2 65 lbs. 22 FE-1-1620-X 21" 25 3/4" 12" N/A 0 None 42 lbs 12 FE-1-1620-18RorL-X 36 1/2" 25 3/4" 16"x20" 12" 18" 1 R or L 55 lbs 18 FE-1-1620-18RL-X 52" 25 3/4" 12" 18" 2 R&L 67 lbs 25 FE-1-1812-X 23" 23 3/4" 12" N/A 0 None 42 lbs 13 FE1-1812-18RorL-X 38 1/2" 23 3/4" 18"x18" 12" 18 57 lbs R or I 22 1 FE1-1812-18RLX 23 3/4" 12" 18" R&L 65 lbs 54" 2 23 FE-1-1824-X 23" 29 3/4" 14" N/A 0 None 60 lbs. 16 FE-1-1824-24RorL-X 44 1/2" 29 3/4" 18"x24" 14" 24" R or L 105 lbs 28 1 FE-1-1824-24RL-X 66" 29 3/4" 14" 24" R&L 110 lbs 26 2 FE-1-2424-X 14" 29" 29 3/4" N/A 0 None 90 lbs 20 FE-1-2424-24RorL-X 50 1/2" 29 3/4" 24"x24" 14" 24" R or L 103 lbs 34 FE-1-2424-24RLX 72' 29 3/4" 14 24 2 R&L 122 lbs. 44 FE-2-1620-X 37" 12" 25 3/4" N/A 0 None 72 lbs 18 FE-2-1620-18RorL-X 52 1/2' 25 3/4" 12" 18 R or L 84 lbs. 25 16"x20" FE-2-1620-18RL-X 68" 25 3/4" 12" 18" 2 R&L 100 lbs 32 FE-2-1812-X 41" 23 3/4" 12" N/A 0 None 65 lbs 18 FE-2-1812-18RorL-X 56 1/2" 23 3/4" 18"x18" 12" 18" 1 R or L 78 lbs. 26 FE-2-1812-18RLX 72" 23 3/4" 12" 18" 2 R&L 84 lbs 44 FF-2-2424-X 53" 29 3/4" 14' N/A 0 None 124 lbs. 33 FE-2-2424-24RorL-X 74 1/2" 29 3/4" 24"x24" 14" 24" R or L 132 lbs. 1 38 FE-2-2424-24RLX 96' 14" 24 2 R&L 29 3/4" 140 lbs. 50

FEATURES:

Backsplash has tile edge for ease of installation.

Sink bowls are 3/4" coved corner and meet NSF requirements.

Rolled Rim Edge for additional strength.

15"x15", 16"x20" & 18"x18" Sink Bowls are 12" deep.

18"x24" & 24"x24" Sink Bowls are 14" deep.

9" Backsplash.

CONSTRUCTION:

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Gussets welded to a die-embossed reinforced plate.

MATERIAL:

1 5/8" diameter galvanized legs with

1" adjustable plastic bullet feet.

Entire unit is 18 gauge 304 stainless steel.

Gussets - galvanized steel.

MECHANICAL:

- Supply is 1/2" IPS hot & cold.
- Faucet holes on 8" centers.
- · Faucets are not included (see accessories).
- Waste drains are 1 1/2" IPS S/S basket type, located in center of sink bowl, and are included.

OPTIONAL:

- FE-SS-12 S/S Leg Upgrade For Sinks w/ 12" Deep Bowls
- FE-SS-14 S/S Leg Upgrade For Sinks w/ 14" Deep Bowls



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900


For Smart Fabrication™ Ouotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL Overall: ± .500" Interior: ± .250"

ALL DIMENSIONS ARE TYPICAL

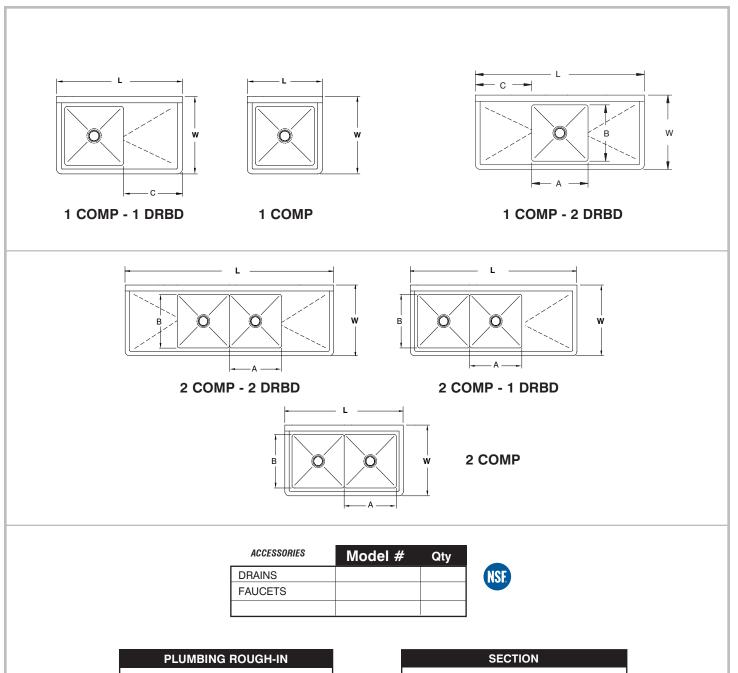



22 1/2" (CLEAR) 39 1/2"

43 1/2"

Bowl Depth

+ 2 1/2"

37" (Working Height) Bowl Depth