

PRODUCT:

QUANTITY:

ITEM:

Designed Smart

- Heavy-duty top mount, insulated rectangular Drop-in Hot Food Wells is designed for installation in metal or wood countertops.
- Hot Food Well accommodates standard size steamtable pans up to 6" deep.
- EZ-Fill Hot food Wells are equipped with self-regulating water fill system. The water fill system supplies and maintains the correct water level in each pan.
- Water fill system includes:
 - Solenoid control that senses water levels and automatically turns water flow off.
 - Water overflow hole.
 - Welded drain and "easy to access" manifold.
- Unit is heated by a tubular heating element shaped in serpentine fashion for even heat distribution to pan base.
- Element is mounted under well and secured by aluminized deflector shield for maximum efficiency.
- Unit standard with APW Wyott EZ-Locks on all four exterior sides for easy installation.
- Well is constructed on deep-drawn austenite stainless steel, above countertop with aluminized outer housing with sides and bottom fully insulated.
- Drains are provided with stainless steel 1/2" NPT welded to bottom of pan and provided with removable screen.
- The units feature complete UL construction including electrical conduit, bezel and control box.



Model SHFWEZ-2

Options

- Lever operated drain valve (56420)
- Drain kit-includes 1/2" PVC, 3' high temperature hose
- Three phase
- Perforated well-pan bottom (14900)
- Telescoping covers, dome and dome hinged covers, adapter plates, adapter bars, pan lifters and perforated pan bottoms.

APW Wyott Design Features

- Deep-drawn stainless steel well pans.
- Stainless steel drain coupling.
- Units are used WET only.
- Easy access to heating elements.
- Thermostatic control with 26" effective length conduit.
- Large indicating pilot light.
- Multiple units can be installed in same table or counter.
- Single power hookup.


Reliability backed by APW Wyott's Warranty

All APW Wyott Food Wells are backed by a 1-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.

•Certified by the following agencies:



See reverse side for product specifications.

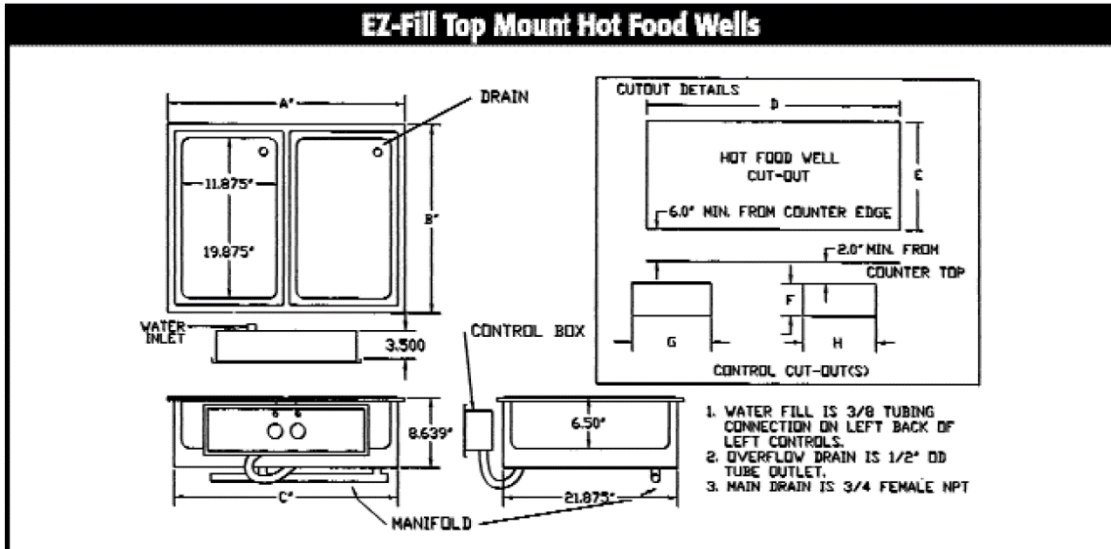

Model	Outside Dimensions				Cut Out		Control Cut Out			Ship Weight lbs.
	A	B	C	J Overflow	D	E	F	G	H	
SHFWEZ-1	15.375"	23.438"	12.848"		21.875"	13.875"	5.00"	12.50"	N/A	24
SHFWEZ-2D	29.42" (74.2)	23.44" (59.5)	27.79" (70.6)	13.87" (35.2)	28.5" (72.4)	22.5" (57.2)	5.0" (12.7)	16.50" (41.9)	N/A	48
SHFWEZ-3D	43.46" (110.4)	23.44" (59.5)	41.83" (106.2)	27.92" (70.9)	42.5" (108.0)	22.5" (57.2)	5.0" (12.7)	33.50" (85.1)	N/A	68
SHFWEZ-4D*	57.50" (146.0)	23.44" (59.5)	55.87" (141.9)	27.92" (70.9)	56.5" (143.5)	22.5" (57.2)	5.0" (12.7)	12.50" (31.7)	16.50" (41.9)	98
SHFWEZ-5D	71.54" (181.7)	23.44" (59.5)	69.92" (177.6)	41.96" (106.6)	70.5" (179.1)	22.5" (57.2)	5.0" (12.7)	33.50" (85.1)	N/A	118
SHFWEZ-6D	85.59" (217.4)	23.44" (59.5)	83.96" (213.2)	41.96" (106.6)	84.5" (214.6)	22.5" (57.2)	5.0" (12.7)	33.50" (85.1)	N/A	260

*4 well unit has 2 bezels & 2 control cut outs.

OPTIONS								
Description: Lever Operated Drain Valve			Stock No. 56360			Drain Manifold: Fabricated to Unit, Required		
ELECTRICAL SPECIFICATIONS								
Model	Electrical Ratings 1200 EA. @ 208V 1600 EA. @ 240V				Electrical Ratings 1600 EA. @ 208V			
	Volts	Watts	Amps 1-Phase	Max. Amps 3-Phase	Volts	Watts	Amps 1-Phase	Amps 3-Phase
SHFWEZ-1	208 / 240	2400 / 3200	12 / 14	10 / 12	208	3200	16	14
SHFWEZ-2D	208 / 240	2400 / 3200	12 / 14	10 / 12	208	3200	16	14
SHFWEZ-3D	208 / 240	3600 / 4700	18 / 20	10 / 12	208	4800	23	14
SHFWEZ-4D	208 / 240	4800 / 6400	24 / 27	16 / 18	208	6400	31	21
SHFWEZ-5D	208 / 240	6000 / 8000	29 / 34	20 / 24	208	8000	39	27
SHFWEZ-6D	208 / 240	7200 / 9600	35 / 40	20 / 24	208	9000	47	27

*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.