

Stationary Models SST-2 SST-3 SST-4 SST-5
 Portable Models PSST-2 PSST-3 PSST-4 PSST-5
 ITEM:


PRODUCT:

QUANTITY:

Designed Smart

APW Hot Well Sealed Element Steam Tables individual sealed wells are fully covered and constructed of type 304 stainless steel.

- Individual infinite switch heat controls; thermostatic also available
- Indicator light remains on while control is in ON position
- Standard with 750 watt elements; 1200 and 1600 watt elements are available
- Deep drawn type 304 stainless steel well
- Fully welded drain
- Copper manifold with gate valve is standard
- ½" thick poly cutting board mounted on stainless steel shelf supported by stainless steel brackets
- Available with either, stainless steel legs and under shelf or coated steel legs and under shelf
- Cord and plug included with standard units

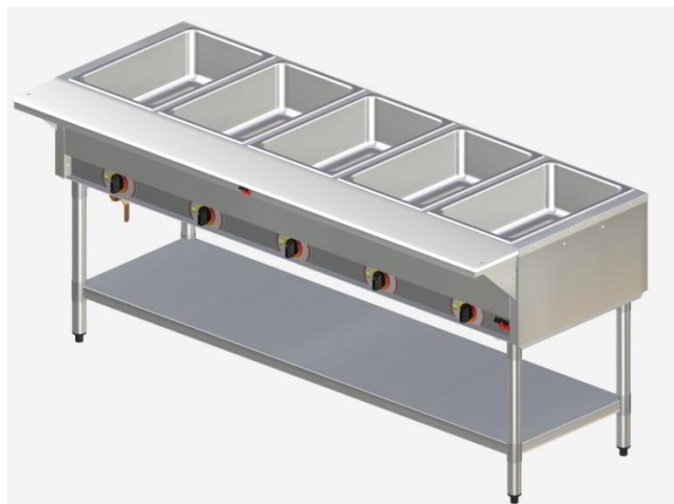

Model: SST5

APW Wyott Design Features

• Heavy gauge stainless steel construction for the body. Individual controls allow for wet or dry application.

Features include:

- Poly cutting board
- Stainless steel dish shelf
- High-output tubular heating elements.
- Stationary and portable units available.
- UL and UL Sanitation approved
- Full range of options and accessories.
- All wells complete with drains running to a common all-copper manifold complete with ball valve

Reliability Backed by APW Wyott's Warranty

All APW Wyott cooking equipment is backed by a 1-year limited warranty and a 1-year on-site labor warrant. *

- Certified by the following agencies:



Options and Accessories

Cutting Boards

- NSF approved Plastic Cutting Boards – 7 1/2" X 12"
- Hardwood – 8" X 1-1/4"
- Richlite Heat-Resistant – 8" X 12"

- Serving Shelves with Glass Protector
- Plate Shelves
- Tubular Tray Slide – 3-Bar
- Buffet Shelves
- Spillage Pans
- Adjustable Overall Shelf System
- Pot Hooks
- Deluxe Serving Shelves
- Solid Tray Slide
- Rolltop Covers
- Adapter Bars for Food Pans – 10" X 12"
- Adapter Tops for Round Inserts – 4-, 7-, and 11-Quart
- Auto Fill

Stationary Models SST-2 SST-3 SST-4 SST-5
 Portable Models PSST-2 PSST-3 PSST-4 PSST-5
 ITEM:

PRODUCT:

QUANTITY:

PRODUCT SPECIFICATIONS

Construction:

Individual sealed wells are fully covered and constructed of type 304 stainless steel.

Freight Class: 85 verify

FOB: Standex Dock

Stationary

Non-Marking feet adjust unit height from 34 1/2" to 35 1/2".

| Model # | # of top openings | Length | Weight | Electrical data |
|-----------|-------------------|---------|---------|---------------------|
| SST-120-2 | 2 | 31 3/8" | 101 lbs | 1500W, 120V, 12.5A |
| SST-208-2 | 2 | 31 3/8" | 101 lbs | 1500W, 180V, 7.21A |
| SST-240-2 | 2 | 31 3/8" | 101 lbs | 1500W, 240V, 6.25A |
| SST-120-3 | 3 | 45 3/4" | 129 lbs | 2250W, 120V, 18.8A |
| SST-208-3 | 3 | 45 3/4" | 129 lbs | 2250W, 180V, 10.82A |
| SST-240-3 | 3 | 45 3/4" | 129 lbs | 2250W, 240V, 11.9A |
| SST-120-4 | 4 | 60 1/8" | 162 lbs | 3000W, 120V, 25.0A |
| SST-208-4 | 4 | 60 1/8" | 162 lbs | 3000W, 208V, 14.42A |
| SST-240-4 | 4 | 60 1/8" | 162 lbs | 3000W, 240V, 15.8A |
| SST-120-5 | 5 | 74 1/2" | 199 lbs | 3750W, 120V, 31.3A |
| SST-208-5 | 5 | 74 1/2" | 199 lbs | 3750W, 208V, 18.3A |
| SST-240-5 | 5 | 74 1/2" | 199 lbs | 3750W, 240V, 19.8A |

Portable

Push handle and 4" – diameter casters, two with brake included

| Model # | # of top openings | Length | Weight | Electrical data |
|------------|-------------------|---------|---------|---------------------|
| PSST-120-2 | 2 | 31 3/8" | 101 lbs | 1500W, 120V, 12.5A |
| PSST-208-2 | 2 | 31 3/8" | 101 lbs | 1500W, 208V, 7.21A |
| PSST-240-2 | 2 | 31 3/8" | 101 lbs | 1500W, 240V, 6.25A |
| PSST-120-3 | 3 | 45 3/4" | 129 lbs | 2250W, 120V, 18.8A |
| PSST-208-3 | 3 | 45 3/4" | 129 lbs | 2250W, 208V, 10.82A |
| PSST-240-3 | 3 | 45 3/4" | 129 lbs | 2250W, 240V, 11.9A |
| PSST-120-4 | 4 | 60 1/8" | 162 lbs | 3000W, 120V, 25.0A |
| PSST-208-4 | 4 | 60 1/8" | 162 lbs | 3000W, 208V, 14.42A |
| PSST-240-4 | 4 | 60 1/8" | 162 lbs | 3000W, 240V, 15.8A |
| PSST-120-5 | 5 | 74 1/2" | 199 lbs | 3750W, 120V, 31.3A |
| PSST-208-5 | 5 | 74 1/2" | 199 lbs | 3750W, 208V, 18.3A |
| PSST-240-5 | 5 | 74 1/2" | 199 lbs | 3750W, 240V, 19.8A |

AutoFill® Automatic Water System

For AutoFill add "A" to the front of the Model number.

Example: ASST-120-2

Receptacle configurations required for Sealed Well Food Tables.

| | | | | | |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | | | | | |
| 15 AMP 125V | 15 AMP 250V | 20 AMP 250V | 30 AMP 125V | 30 AMP 250V | 50 AMP 125V |
| model # | model # | model # | model # | model # | model # |
| S(P)HT2-120 | S(P)HT2-240 | S(P)HT4-240 | S(P)HT3-120 | S(P)HT5-240 | S(P)HT4-120 |
| furnished with NEMA 5-15 plug | furnished with NEMA 6-15 plug | furnished with NEMA 6-20 plug | furnished with NEMA 5-30 plug | furnished with NEMA 6-30 plug | furnished with NEMA 5-50 plug |

*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.