



The New Symbol of Innovation

Four Solid Half Door Freezer



J4SFF-40B
40 cu.ft., 4 half doors



Stainless steel interior & exterior standard!
Energy-saving half door design!
Convenient low box height - without sacrificing interior storage space!

STANDARD FEATURES:

- Capillary tube
- CFC-free R-404a Refrigerant
- 2 Epoxy-Coated Wire Shelves per Door
- Snap-In Magnetic Door Gaskets
- 6' Cord & Plug
- 5" Casters
- Foamed-in-place Polyurethane Insulation
- Fully Covered Interior Corners
- Energy-Saving Half Door Design
- Door Locks Standard
- Top-Mounted Compressor & Evaporator Coil
- Electric Condensate Evaporator
- Exterior Digital Temperature Control
- Interior Light
- Assembled in the USA

MATERIALS:

INTERIOR: 304 series stainless steel interior for durability and appearance.
Epoxy-coated wire shelves.

EXTERIOR: Stainless steel cabinet and doors.



DIMENSIONAL DATA (FREEZERS):

Model No.	L	D	H	Half Doors	Cu.Ft.	Shelves	H/P	Volt	Amp.	NEMA	Ship Wt.
J2SFF-21B	29.1	32.5	76.2	2	20	4	1/2	115/60/1	6.1	5-20P	360
J4SFF-40B	49.6	32.5	76.2	4	40	8	3/4	115/60/1	12.1	5-20P	525
J6SFF-61B	74.8	32.5	76.2	6	61	12	3/4, 1/2	220/60/1	7.9		750



Refrigeration Equipment Manufacturer

Solid Door Freezer

J4SFF-40B

Description: Four solid half door freezer, 40 cu. ft

Features & Benefits

Stainless steel interior and exterior for greater durability, construction and appearance.

Self-contained top mounted refrigeration system and high humidity coated **fin coil** evaporator.

- Holds -10° F to 10° F as freezer

Automatic interior light.

Exterior LED temperature display with digital controls. **Temperature setting is easy, fast and accurate.**

Micro-controller with adjustable temperature variance, automatic defrost intervals, setpoint limits, and parameter locking functions.

2.5" thick, foamed-in-place polyurethane high density insulation.



8 adjustable epoxy-coated steel wire shelves. 5" casters standard. **Easy mobility and installation.**

Convenient and energy-efficient half-door design.

Heavy-duty overall construction for high-volume, constant duty operation.

Adjustable tension spring loaded doors.

Electric condensate evaporator - **no floor drain required!**

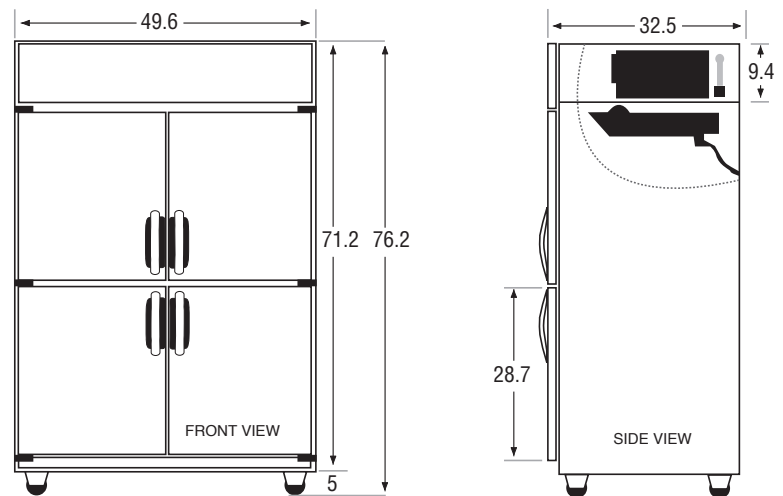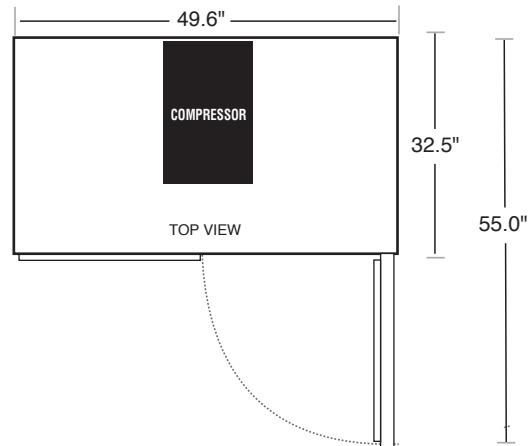

OPTIONS

- Extra Interior Shelves Qty. _____
- Bun Tray Racks (per section) Qty. _____

General Information

Cubic Ft.: 40

Shelf Size: 24.5" x 22"

Half Doors: 4

Unit Weight: 495 lbs.

Exterior: Stainless

Ship Weight: 525 lbs.

Interior: Stainless

Technical Data

Refrigerant: R-404a

Volts: 115

Start Amps: 18.15

#Compressors: 1

Run Amps: 12.10

Cord Length: 96 in.

Horsepower: 3/4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE