EQHP-ESP

19.8" x 4.0" x 4.0" (50.3cm x 10.2cm x 10.2cm)



- Designed specifically for espresso applications
- Provides 422 gallons of hardness reduction @ 10.5 GPG (grains per gallon) with a service flow rate of .5 gpm
- Specialized blend of resin targeted to reduce hardness and alkalinity
- Integrated carbon block media to reduce chlorine taste and odor
- Sanitary quick connect valve-in-head design simultaneously shuts off and vents water with 1/4 turn, allowing for simple and troublefree cartridge change-outs

Agency:

Specifications

Product #: 39000.0008

Cartridge Type: Sanitary Quick Connect

Additional Features


Capacity

Service Flow Rate	Capacity	Micron Rating	
0.5 gal/min (1.9 L/min)	422 gal. (1597.4 L) @0 GPG of hardness	5.0	

Plumbing Requirements

Max Operating	Max Operating	Inlet	Outlet	
Pressure	Temperature	Connection	Connection	
125 psi (862 kPa)	100°F(38°C)	3/8 IN FNPT		



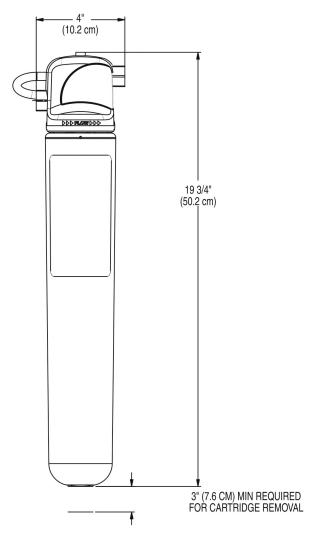

EQHP-ESP

Unit			Shipping					
	Width	Height	Depth	Width	Height	Depth	Weight	Volume
English	4.0 in.	19.8 in.	4.0 in.	-	-	-	4.550 lbs	-
Metric	10.2 cm	50.3 cm	10.2 cm	-	-	-	2.064 kgs	-



Related Products & Accessories: EQHP-ESP(39000.0008)

