



CONTROL CENTER MODEL CC-101

WATER/ENERGY SAVING FEATURE • AUTOMATIC REVERSING ACTION

SPECIFICATIONS

STAINLESS STEEL ENCLOSURE

- NEMA 4
- Waterproof construction
- 18 gallon (68.11 liters) stainless steel
- Easy to clean and keep clean

AUTOMATIC REVERSING CONTROL

- Reverses direction of motor at each startup
- Increases cutting element life and reduces jams

REVERSING DELAY

- Disposer will not reverse while motor is in motion
- Protects motor from burn out from operator misuse

AUTOMATIC DROP OUT SYSTEM

- If a power loss occurs, control will automatically disengage power lines
- Disposer must be restarted

DISCONNECT SWITCH

- Disconnects electrical power beyond switch for service
- Interlock with front cover

SOLID STATE CONTROL

- Operates on 24V

SOLID STATE CONTROL CIRCUIT

- Printed circuit board with control diagnostic/function lights, delay timers and timed run pin and reversing control

POST WATER FLUSH

- Adjustable timer allows water to run automatically for up to 10 minutes, flushing disposer and drain lines after disposer is shut off

TIMED RUN OR CONTINUOUS RUN


- Selected at your discretion, simply by moving the plug-in in on the printed circuit board
- Timed run shuts off disposer automatically after 10 minutes
- Can be shut off manually any time

SOLENOID VALVE

- Packed unattached inside control center carton
- Ensures that water is flowing into disposer while disposer is operating



DIMENSIONS

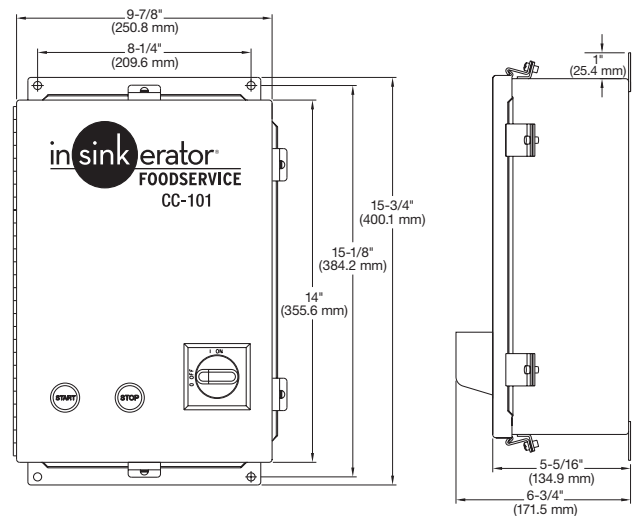


VOLTAGE/PHASE AVAILABILITY

Model	Voltage/Hz	Phase	Disposer Models
CC101K-1	120V, 50/60 Hz	1 Ph	SS-50 to SS-200
CC101K-2	208-240V, 50/60 Hz	1 Ph	SS-50 to SS-200
CC101K-3	208-240V, 50/60 Hz	3 Ph	SS-50 to SS-1000
CC101K-4	380-460V, 50/60 Hz	3 Ph	SS-50 to SS-1000

Our products appear on **The KCL CADalog** CD-ROM based CAD Foodservice Symbol Library. More information is available from **Kochman Consultants, Ltd.** at www.kclcad.com.



RECOMMENDED INSTALLATION

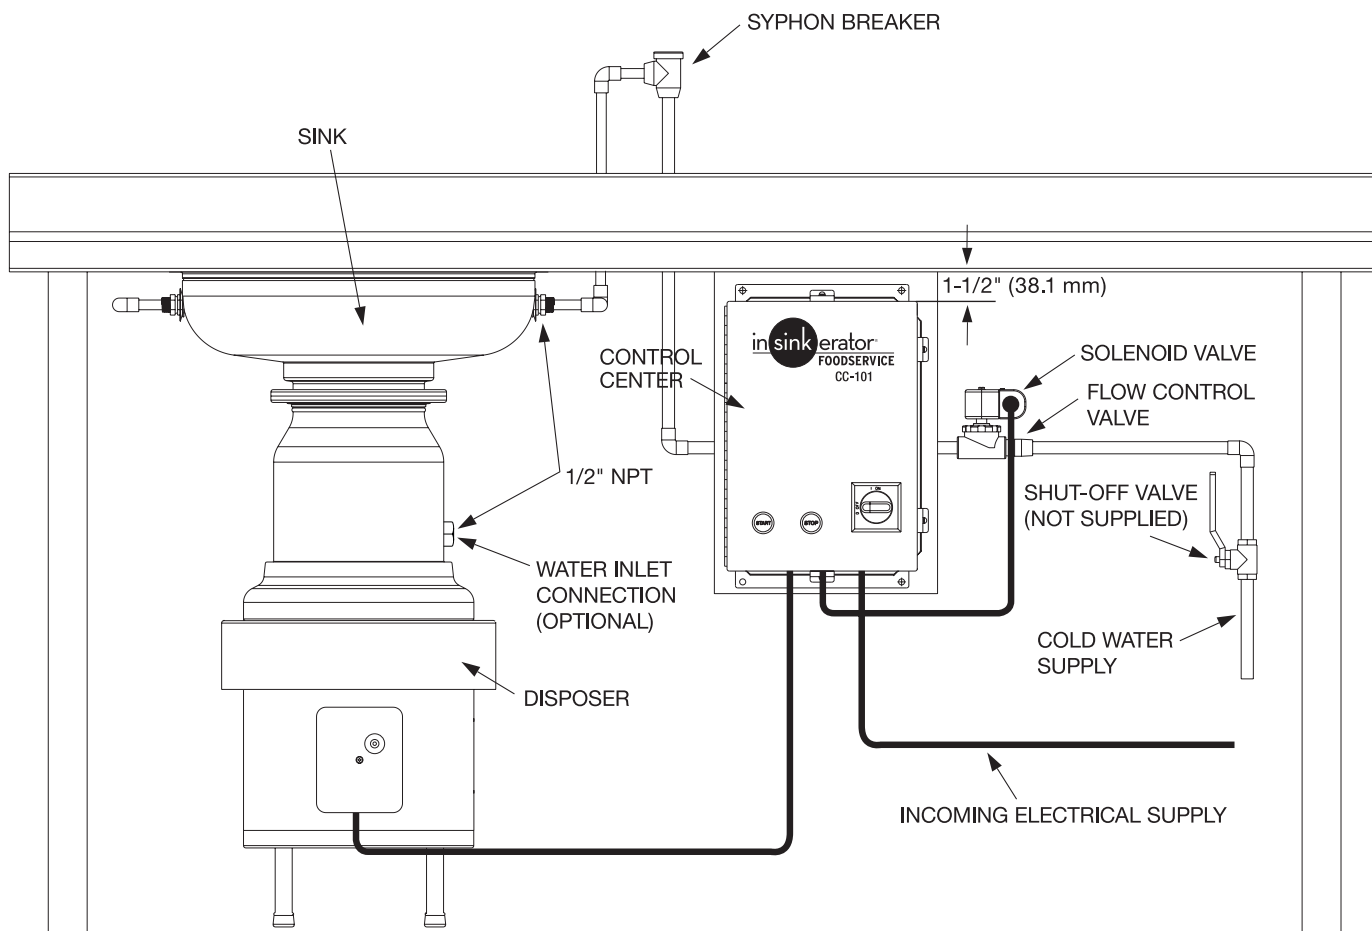

NOTE: The CC-101 control center should be mounted 1-1/2" (38.1 mm) back from the front surface of the table.