




JOB \_\_\_\_\_ ITEM # \_\_\_\_\_  
**FLOOR FRYERS**

EFS-G Series

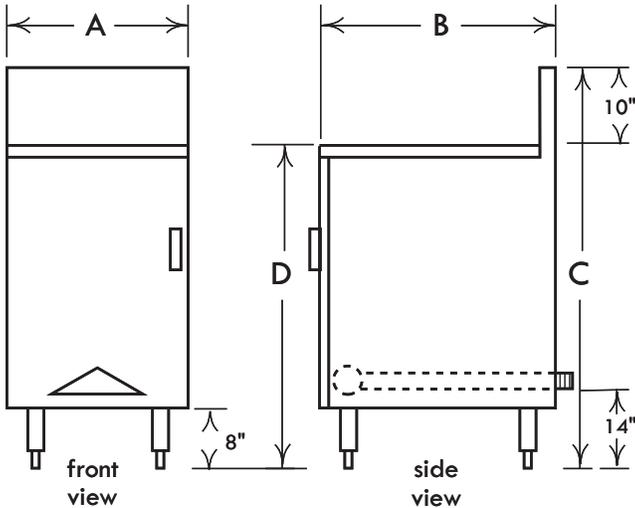

EFS14-G/DFS16-G



EFS18-G



**Standard Features, Benefits & Options**

**CONSTRUCTION:** Easy cleaning, corrosion resistant G90 galvanized back & sides, stainless steel door. Welded and polished rolled stainless bullnose. Integrated lower door liner for door stability. Adjustable 6" stainless steel legs for easy leveling. Requires a 6" (152mm) clearance on the sides and rear to combustible surfaces.

**CONTROLS:** Invensys Thermostat - 200°F to 400°F, 100% safety shut off with built in pressure regulator, high limit control for back-up safety, automatic standing pilot and brass burner valves. Optimal pressures are 4" (102mm) WC for natural gas and 10" (279mm) WC for propane. Manifold size is 3/4" NPT. All controls are tested and confirmed in good working order. Calibration and adjustments are the responsibility of the installer.

**TANK:** Easy cleaning, corrosion resistant stainless steel tube type tank for maximum surface heat transfer. Built in flue deflector. Deep cold zone allows food particles to sink below tubes reducing shortening breakdown and taste transfer as well as extending the life and quality of fryer shortening. 1 1/4" ball valve for rapid draining.

**BASKETS:** Two heavy duty, nickel plated wire baskets with coated handles. Permanently affixed double rod hangers firmly suspends loaded baskets out of frying vat.

rev.: 7/2013

**OPTIONS & ACCESSORIES:** Stainless steel sides, stainless steel tank covers, joiner strips, flame shields, gas hoses, cleaning supplies, single large baskets and casters.

SPECIFICATIONS				
Model		EFS14-G	EFS16-G	EFS18-G
Width "A"	in.	15.5	15.5	21
	cm	39.4	39.4	53.3
Depth "B"	in.	30.25	30.25	30.25
	cm	76.8	76.8	76.8
Height "C"	in.	47.13	47.13	47.13
	cm	119.7	119.7	119.7
Working Height "D"	in.	36.25	36.25	36.25
	cm	92.1	92.1	92.1
Weight	lbs. / kgs.	170 / 77	185 / 84	204 / 93
Burner Qty		3	4	5
Total BTU		90,000	120,000	150,000
FRYER TANK FILL CHART GUIDE				
Gallons		5	6	9
Liters		19	23	34
Pounds		35-40	40-50	65-75
Kilograms		16-18	18-23	30-34

NOTICE: In an ongoing effort of product development & improvement, Comstock-Castle reserves the right to change specifications and product design without notice. Such modifications do not entitle the buyer to corresponding changes or replacements for previously purchased equipment.

