



FLAV-R-SAVOR® HEATED AIR CURTAINS

Models FSHAC-2, -3, -2PT FSHACH-2, -3, -2PT

The Hatco Flav-R-Savor Heated Air Curtain effectively and safely holds hot food hot without the use of doors, allowing immediate access to product. Warm air at the front of the cabinet is forced downward, through ducts above the opening, forming a "curtain" of heated air. A portion of the heated air is drawn toward the rear through special perforations on the back wall, warming each pan.

FLEXIBILITY

The *patent-pending* Heated Air Curtain is ideal for holding wrapped product like tortillas, burritos, and ribs, as well as product on sheet pans like biscuits, chicken, hamburger patties, pizza, and baked potatoes. Holding temperatures range from 80°F to 175°F (27°-79°C).

Choose from 2-pan and 3-pan units, single opening or pass-through, with or without humidity. Humidified models can be filled manually or with the auto-fill feature.

The standard units hold half-size sheets pans (one per shelf) and the 2-pan pass-through model accommodates two full size sheet pans.

An optional back-to-back mounting for two units standard units on a single base is available.

QUALITY

The following features assure the finest performance for years to come:

- Heated Air Curtain effectively and safely holds hot food hot without the use of doors, allowing immediate access to product.
- 2-pan and 3-pan units available, with or without humidity.
- The standard units hold half-size sheets pans (one per shelf) and the 2-pan pass-through model accommodates two full size sheet pans.



Model FSHACH-3
Patent-pending



Model FSHACH-2PT
Pass-through with
accessory food pans
Patent-pending



Model FSHACH-2 with
accessory food pans
Patent-pending

METAL SHEATHED AIR HEATING ELEMENTS
GUARANTEED AGAINST BURNOUT AND BREAKAGE
FOR TWO YEARS.



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com




Form No. FSHAC-1006(S)-1

Printed in U.S.A.



FLAV-R-SAVOR® HEATED AIR CURTAINS

Models FSHAC-2, -3, -2PT FSHACH-2, -3, -2PT

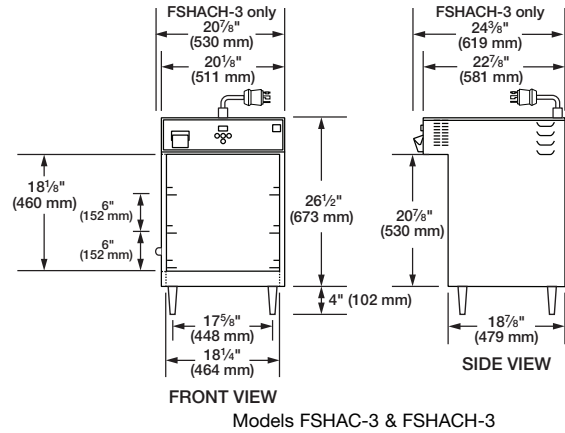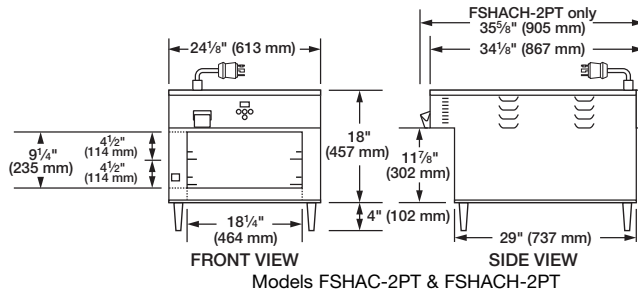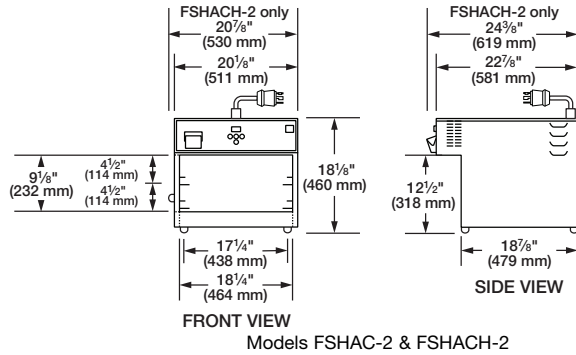

DIMENSIONS

FSHAC-2: 20¹/₈"W x 22⁷/₈"D x 18¹/₈"H (511 x 581 x 460 mm).
 FSHACH-2: 20⁷/₈"W x 24³/₈"D x 18¹/₈"H (530 x 619 x 460 mm).
 FSHAC-3: 20¹/₈"W x 22⁷/₈"D x 26¹/₂"H (511 x 581 x 673 mm).
 FSHACH-3: 20⁷/₈"W x 24³/₈"D x 26¹/₂"H (530 x 619 x 673 mm).
 FSHAC-2PT: 24¹/₈"W x 34¹/₈"D x 18"H (613 x 867 x 457 mm).
 FSHACH-2PT: 24¹/₈"W x 35⁵/₈"D x 18"H (613 x 905 x 457 mm).

Cabinet Openings:

FSHAC-2, FSHACH-2: 18¹/₄"W x 9¹/₈"H (464 x 232 mm).
 FSHAC-3, FSHACH-3: 18¹/₄"W x 18¹/₈"H (464 x 460 mm).
 FSHAC-2PT, FSHACH-2PT: 18¹/₄"W x 9¹/₄"H (464 x 235 mm).

Water Tank Capacity (Humidified models only):

FSHACH-2, -3: 2¹/₄ gallons (9 liters).
 FSHACH-2PT: 3 gallons (11 liters).


VOLTAGE

FSHAC-2, -3: 120/208 volts, 60 Hz, 1877 watts, 9.0 amps (uses NEMA L14-20P).
 FSHACH-2, -3: 120/208 volts, 60 Hz, 2950 watts, 14.2 amps (uses NEMA L14-20P).
 FSHAC-2PT: 120/208 volts, 60 Hz, 3152 watts, 15.2 amps (uses NEMA L14-20P).
 FSHACH-2PT: 120/208 volts, 60 Hz, 4952 watts, 23.8 amps (uses NEMA L14-30P). 208 volts, 60 Hz, 4952 watts, 23.8 amps (uses NEMA L6-30P).

CORD LOCATION

FSHAC-2, -3, FSHACH-2, -3: Top of unit towards the back, middle.
 FSHAC-2PT, FSHACH-2PT: Top of unit towards the back, left side.

PLUG CONFIGURATIONS



SPECIFICATIONS

Standard Models

Model	Type	Shipping Weight
FSHAC-2	2-Tier Warmer with Air Curtain	80 lbs. (36 kg)
FSHAC-3*	3-Tier Warmer with Air Curtain	100 lbs. (45 kg)
FSHAC-2PT*	2-Tier Pass-Through Warmer with Air Curtain	120 lbs. (55 kg)

Humidified Models*

Model	Type	Shipping Weight
FSHACH-2	Humidified 2-Tier Warmer with Air Curtain	80 lbs. (36 kg)
FSHACH-3*	Humidified 3-Tier Warmer with Air Curtain	100 lbs. (45 kg)
FSHACH-2PT*	Humidified Pass-Through 2-Tier Warmer with Air Curtain	120 lbs. (55 kg)

* NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

* Standard with autofill.

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

ACCESSORIES

- Back-to-Back Mounting on a Single Base (FSHAC-2 and FSHACH-2 models only) (add 1" (25 mm) to height)
- 4" (102 mm) legs (Standard on 2-Pan Pass-Through and 3-Pan models)

- Slant Rack
- Rib Rack
- Food Pans

PRODUCT SPECS

Heated Air Curtain

The Heated Air Curtain shall be a Flav-R-Savor® Model as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Heated Air Curtain shall be rated atwatts,volts, and beinches (millimeters) in overall width. It shall consist of a

powdercoated steel housing, stainless steel front panel, and metal sheathed heating elements. Heated Air Curtain features easy-to-use digital controls, a lighted on-off switch, and 6' (1829 mm) cord with plug.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com