



Project _____

Item # _____

Quantity _____

Remote Drop-In Frost Tops

Models: FTBR-1, -2, -3, -S2, -S3

FTBX-1, -2, -3, -S2, -S3

The Hatco Remote Drop-In Frost Top keeps pre-chilled beverages, snacks, hors d'oeuvres and side dishes cool and ready to serve, but in remote configurations that offer flexibility for your particular kitchen design needs. Also available in a Slim Line Series, providing wider access to your customer, regardless of the sneeze guards.

Standard features

- Available in one-, two and three-pan models as well, as two- and three-pan slim configurations
- Accommodates full-size and half-size sheet pans
- NSF 7 approved cold wall construction utilizes R-404A refrigerant keeping food product cold without drying it out
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- 1" NPT drain simplifies cleaning (excluding FTBR-1 and FTBX-1)
- Matches the Hatco line of Heated Wells for an integrated look

• FTBR models only:


- Include a condensing unit (shipped loose, can be field mounted up to 50 feet [15.24 meters] of tubing from unit) and a control panel (shipped loose - probe wires are 16 feet [4.9 meters]) for installing in more convenient or desirable locations

• FTBX models only:

- Include a control panel (shipped loose - probe wires are 16 feet [4.9 meters mm]) but shipped without a condensing unit for the increased flexibility of multiple Frost Top configurations

Remote models consist of these components shipped loose

Model FTBR-2S with accessory sheet pans

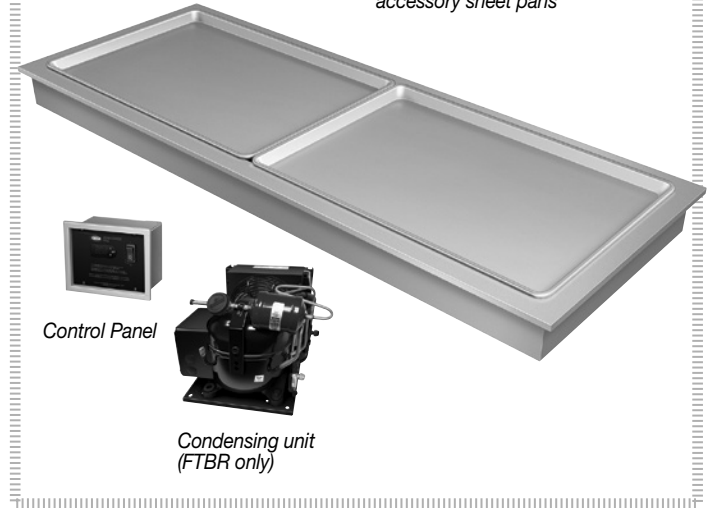

Control Panel

Condensing unit (FTBR only)

Options (available at time of purchase only)

- Additional Four-Year Parts Only Warranty on Compressor

Accessories

- Full-Size Pan (18"W x 13"D [457 x 330 mm])
- Half-Size Pan (18"W x 26"D [457 x 660 mm])



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com



Remote Drop-In Frost Tops

Models: FTBR-1, -2, -3, -S2, -S3, FTBX-1, -2, -3, -S2, -S3

Ordering Instructions:

Please specify the following with each order:

1. Desired Voltage:

120 (220-240V FTBX only)

2. Number of Full-Size Sheet Pans Accommodated:

1-, 2-, 3-pan as rectangular, sheet pan with Slim or Standard configuration


3. Remote Refrigeration:

Note: Shipped loose: Frost Top, Control Panel (Probe wires are 16 feet [4.9 meters]) and a TXV valve


A. FTBR with a condensing unit - may be field mounted up to 50' (15.24 meters) of tubing from the unit - that is shipped loose

B. FTBX without a condensing unit (Solenoid Valve attached to Frost Top)

Model FTBR-1, -2, -3 FTBX-1, -2, -3

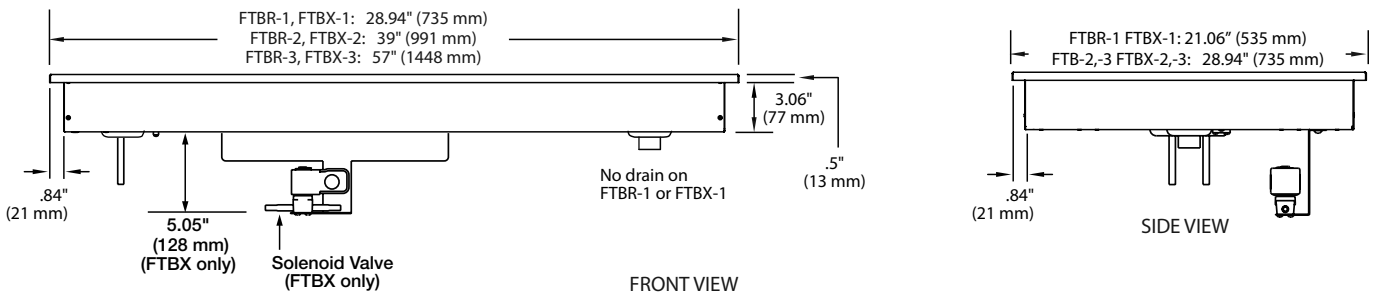


Model FTBR-S2, -S3 FTBX-S2, -S3

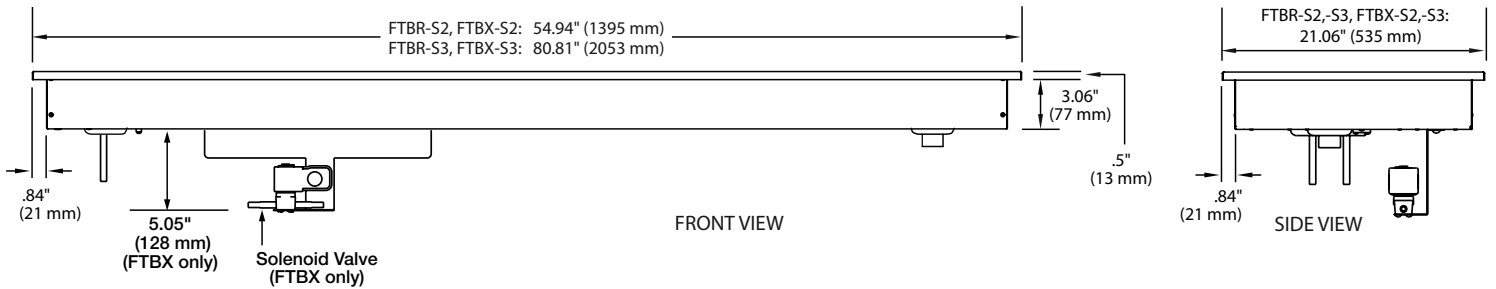


All Models Control Panel

May be field mounted up to 16' (4.9 meters) from unit

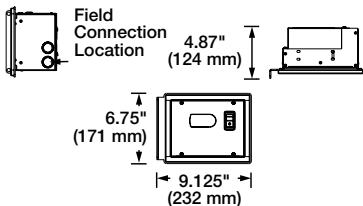

Model FTBR only Condensing Unit

May be field mounted up to 50' (15.24 meters) from unit

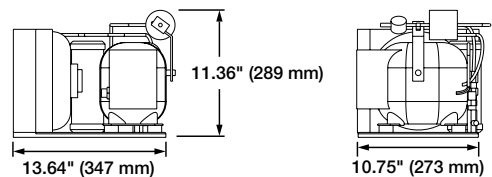

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350


Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com



Remote Drop-In Frost Tops

Models: FTBR-1, -2, -3, -S2, -S3, FTBX-1, -2, -3, -S2, -S3

Cutout Dimensions for Remote Frost Tops



Model	Minimum Width (A)	Maximum Width (A)	Minimum Depth (B)	Maximum Depth (B)
FTBR-1, FTBX-1	27.44" (697 mm)	28" (711 mm)	19.44" (494 mm)	20.125" (511 mm)
FTBR-2, FTBX-2	37.375" (949 mm)	38" (965 mm)	27.31" (694 mm)	28" (711 mm)
FTBR-3, FTBX-3	55.375" (1407 mm)	56" (1422 mm)	27.31" (694 mm)	28" (711 mm)
FTBR-S2, FTBX-S2	53.31" (1354 mm)	54" (1372 mm)	19.44" (494 mm)	20.125" (511 mm)
FTBR-S3, FTBX-S3	79.19" (2011 mm)	79.875" (2029 mm)	19.44" (494 mm)	20.125" (511 mm)

SPECIFICATIONS Remote Drop-In Frost Tops

The shaded areas contain electrical information for International models

Model†	Dimensions Δ (Width x Depth x Height)	Voltage	Load/ BTU/H	HP	Watts	Amps	Phase	Ship Weight
FTBR-1	28.94" x 21.06" x 3.56" (735 x 535 x 90 mm)	120		1/4	804	6.7	Single	125 lbs. (57 kg)
FTBX-1				N/A	12	0.1		85 lbs (39 kg)
FTBX-1		220/230/240	17	.01	171 lbs. (78 kg)			
FTBR-2	39" x 28.94" x 3.56" (991 x 735 x 90 mm)	120		1/4	804	6.7		138 lbs. (63 kg)
FTBX-2				N/A	12	0.1		213 lbs. (97 kg)
FTBX-2		220/230/240	17	0.1	155 lbs (70 kg)			
FTBR-3	57" x 28.94" x 3.56" (1448 x 735 x 90 mm)	120		1/4	804	6.7		179 lbs. (81 kg)
FTBX-3				N/A	12	0.1		130 lbs. (59 kg)
FTBX-3		220/230/240	17	0.1	230 lbs. (104 kg)			
FTBR-S2	54.94" x 21.06" x 3.56" (1395 x 535 x 90 mm)	120		1/4	804	6.7		182 lbs. (83 kg)
FTBX-S2				N/A	12	0.1		
FTBX-S2		220/230/240	17	0.1				
FTBR-S3	80.81" x 21.06" x 3.56" (2053 x 535 x 90 mm)	120		1/4	804	6.7		
FTBX-S3				N/A	12	0.1		
FTBX-S3		220/230/240	17	0.1				

† Models shipped with electronic temperature control and TXV valve (all shipped loose). Exception: FTBR units include a condensing unit and the FTBX units include a solenoid valve attached to well.

Δ For FTBX models only, add 5.05" (128 mm) to the height for the attached solenoid valve.

PRODUCT SPECS Remote Drop-In Frost Tops

The Drop-In Frost Top shall be a Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Frost Top shall be rated at ... watts, ... volts and be ... inches (millimeters) in overall width. It shall utilize R-404A refrigerant and consist of aluminized steel housing, electronic temperature control, and with or without a condensing unit (compressor, sight glass, service valves, receiver, and dryer).

Accessories may include sheet pans.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com