



ITEM NO. _____
PROJECT _____
LOCATION _____
DATE _____ QTY. _____



MPWR332

MPWR SERIES Roll-Thru Refrigerators

MODELS

- ☐ MPWR332
- ☐ MPWR724



FEATURES

STANDARD ELECTRONIC CONTROL

- Increases efficiency, reliability and convenience
- Allows user to easily monitor and adjust defrost functions from the panel interface on the front of the merchandiser
- Decreases service time and calls
- Eliminates cabinet thermostat, defrost timer and digital thermometer or other temperature indicator

CONSTRUCTION

- Exterior front, sides and doors are stainless steel
- Exterior top and bottom are galvanized steel
- All exterior joints and seams fold in without lap joints
- Interior liner and door panel are stainless steel

- 2" foamed-in-place polyurethane insulated walls
- Interior LED light activated by switches for each door
- Interior stainless steel bumper/cart guides

DOORS

- Available with lefthand or righthand door swing
- Heavy-duty pivot hinges
- Centered key locks
- Horizontal handles
- Self-adjusting magnetic gaskets

REFRIGERATION

- Top mounted, self-contained refrigeration system
- Refrigerant: R-134a
- Automatic defrost
- Automatic energy efficient hot gas condensate evaporator
- Refrigerant controlled by thermostatic expansion valve

- Minimum 4" clearance required on top, rear and sides of cabinet
- Temperature range: 34° to 41°F (1° to 5°C)

WARRANTY


- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**




908 Highway 15 North • New Albany, MS 38652
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

TECHNICAL SPECIFICATIONS


MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS*	AMPS	UNIT H.P.	NO. OF DOORS	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. LB/KG
	L	D	H	L	D	H							
MPWR332	31 ³ / ₄	39 ³ / ₄	84 ³ / ₄	806	1010	2153	115	7.8	1/3	2	33.0	82.0	596/271
MPWR724	63 ¹ / ₂	39 ³ / ₄	84 ³ / ₄	1613	1010	2153	115	9.5	1/2	4	72.0	154.9	690/314

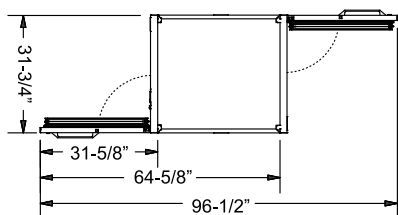


MPWR332 PLAN VIEW

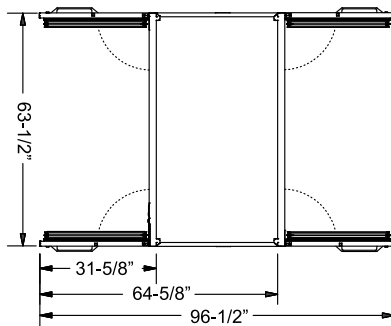


MPWR724 PLAN VIEW

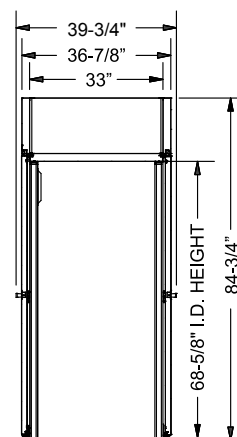

SIDE VIEW - BOTH

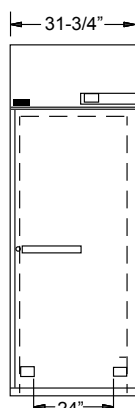


MPWR332 ELEVATION VIEW

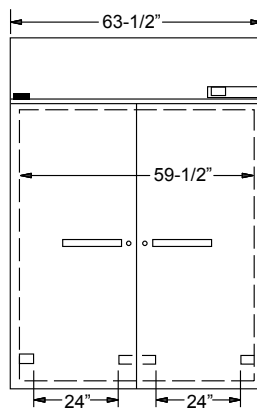

MPWR724 ELEVATION VIEW

NOTE: Accommodates racks under 23-1/2" wide.

*Bumpers are 1-3/4" wide x 1-3/4" tall and are removable on each side of door opening.

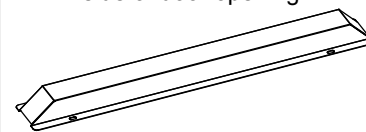


LISTINGS



ANSI/NSF 7

HOOKUP

Both models: Via plug in, 10 foot long flexible three wire 14/3 cord with molded plug.



NEMA 5-15P

BID SPECIFICATIONS

Item no. MPWR _____
Provide _____ () Roll-Thru Refrigerator(s), Master-Bilt® model no. MPWR _____.

Roll-thru refrigerator will be equipped with an electronically controlled monitoring system. The exterior front, sides and doors will be stainless steel while the exterior top and bottom will be

galvanized steel. The interior liner and door panel will be stainless steel. An interior LED light activated by switches for each door and a digital thermometer.

Doors will feature heavy-duty pivot hinges and centered key locks with horizontal handles.

The refrigeration system will be top mounted and self-contained. The

refrigerant will be R-134a and the temperature range will be 34° to 41°F (1° to 5°C). Refrigerant will be controlled by thermostatic expansion valve.

Roll-thru to have standard limited three year parts and labor with additional two year coverage on compressor part.

Roll-thru to be UL and C-UL listed and UL EPH classified.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.