

Job	Item No.	
	itelli ivo.	

Star® Galaxy Popcorn Poppers

□G8-Y □G12-Y □G14-Y □G18-Y

FEATURES

- Available in 8, 12, 14 and 18 oz. kettle sizes to fit any foodservice volume requirements
- Pops 170 to 360 one ounce servings of Star's quality Chief's Choice brand popcorn per hour (Contact factory for details)
- Heated stainless steel corn deck keeps your popcorn fresh and crisp, with a stainless steel drawer for easy removal of old maids (unpopped kernels)
- Heavy-duty aluminum posts, 1/8" thick tempered glass panels and stainless steel construction provide strength, durability and maintenance free operation
- Clear two-piece 3/16" thick Plexiglas door with aluminum hinge and magnetic catch stands up to constant use
- Top control panel has two on/off switches:
 Top switch is for kettle heat
 Bottom is for corn deck and heat lamp

OPTIONS & ACCESSORIES

• Chief's Choice Popcorn

CERTIFICATIONS







DESCRIPTION

The Galaxy popcorn popper brings life to every party. Perfect for convenience stores, concessions, recreational facilities and fun centers, restaurants, bars, theaters or wherever you want to pop and dispense delicious popcorn. Available in 8, 12, 14 and 18 oz. kettle sizes.

SPECIFICATIONS

Galaxy popcorn poppers are constructed with nickel plated steel kettle with stainless steel exterior shell. Kettle is heated by thermostatically controlled spiral sheathed elements and supported by cast aluminum alloy twin hanger arms. Infrared heat lamp with a stainless steel safety cage and a sheathed element under stainless steel deck. Popper cabinet has three full length 1/8" thick tempered glass panels with aluminum alloy corner posts. Access doors are 3/16" plexiglass with full length aluminum alloy hinges with a clear lexan drop panel. Popper is complete with a 6' lead in cord and NEMA plug.


WARRANTY


These units come with a one [1] year warranty for parts and labor.



STAR MANUFACTURING INTERNATIONAL INC.



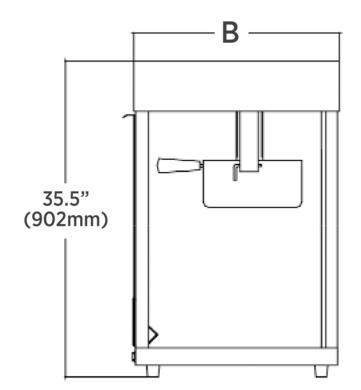

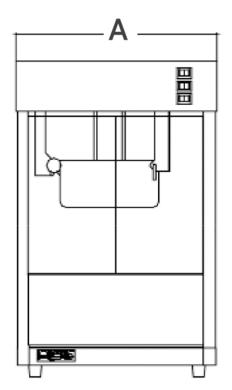

MODEL	DESCRIPTION	SERVINGS PER HOUR	HEIGHT in. (mm)	WIDTH [A] in. (mm)	DEPTH [B] in. (mm)	VOLTS	WATTS	AMPS	NEMA PLUG	APPROX. SHIP WEIGHT
G8-Y	8 OZ. POPPER	170 - 1 Oz.	35.5 (902)	21.1 (536)	21.1 (536)	120V ³ 240V 230V	1,736	14.5 7.2	5-15P ³ 6-15P CEE7/7	99 lb. (44.9 kg)
G12-Y	12 OZ. POPPER	240 - 1 Oz.	35.5 (902)	21.1 (536)	21.1 (536)	120V 240V 230V	2,136	17.8 ¹ 8.9	5-20P ³ 6-15P CEE7/7	99 lb. (44.9 kg)
G14-Y	14 OZ. POPPER	280 - 1 Oz.	35.5 (902)	28.1 (714)	24.1 (612)	120V² 240V 230V	2,416	20.1 ³ 10	5-30P 6-15P CEE7/7	125 lb. (56.7 kg)
G18-Y	18 OZ. POPPER	360 - 1 Oz.	35.5 (902)	28.1 (714)	24.1 (612)	240V 230V	2,816	11.7	6-15P CEE7/7	125 lb. (56.7 kg)

¹Requires 20 Amp dedicated line

²Requires 30 Amp dedicated line

³Not CSA Approved



5-15P









CEE7/7

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



STAR MANUFACTURING INTERNATIONAL INC.

10 Sunnen Drive • Saint Louis, Missouri 63143 Telephone 800 264 7827 • Fax 314 781 5445 www.star-mfg.com