

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

| | |
|-----------------|-------|
| Project : | |
| Model # : | |
| Item # : | Qty : |
| Available W/H : | |
| Approval : | |

Solid Dual Temperature

Reach-In Top Mount
 M3 Series

Model : M3RF19-2-N

FEATURES & BENEFITS

■ **Maintenance-free, Self-Cleaning Condenser (patented)** *Only at Turbo Air*

The accumulation of dust in the condenser causes the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products in refrigerators. The self-cleaning condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ **Hydrocarbon Refrigerants (R-290)**

With innovative and eco-friendly technology, Turbo Air brings you hydro-carbon refrigerators designed to meet the new standards of the EPA and DOE in 2017. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ **Digital temperature control & monitor system**

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originate from cold air leaks.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo freeze).
- Smart defrost system will defrost as needed.
- Automatic evaporator fan motor delays.

■ **Hot gas condensate system** *Only Turbo Air models*

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ **Exterior & interior of cabinet construction**

Stainless steel exterior (galvanized steel top, bottom and back) and stainless steel interior with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury.

■ **Left hinged model available**

■ **Adjustable, heavy duty, PE(polyethylene) coated wire shelves**

■ **LED interior lighting**

■ **High-density polyurethane insulation**

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.



- **Refrigerator holds 33°F ~ 38°F, and freezer holds -10°F ~ 0°F for the best in food preservation**

Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

NATURAL Refrigerant



| Model | Swing Door | CU./FT. | #of Shelves | HP | AMPS | Crated Weight (lbs.) | L x D* x H † (inches) |
|------------|------------|-----------------|-------------|-----|------|----------------------|-----------------------|
| M3RF19-2-N | 2 | 8.39(F) 8.87(R) | 2 | 1/2 | 4.8 | 187 | 25 1/8 x 31 1/2 x 72 |

Model : M3RF19-2-N

| ELECTRICAL DATA | |
|--|--------------------------|
| Voltage | 115/60/1 |
| Plug Type | Ⓜ NEMA 5-15P |
| Full Load Amperes | 4.8 |
| Compressor HP | 1/2 |
| Feed Wires with Ground | 3 |
| Cord Length (ft.) | 9 |
| Refrigerant | R-290 |
| DIMENSIONAL DATA | |
| # of Doors | 2 |
| Net Capacity (cu. ft.) | 8.39(F) / 8.87(R) |
| Ext. Length Overall (in.) | 25 1/8 (640mm) |
| Ext. Depth Overall (in.) * | 31 1/2 (800mm) |
| Ext. Height Overall (in.) † | 72 (1829mm) |
| Freezer Int. Demension (L x D x H) (in.) | 21 5/8 x 25 3/8 x 26 3/4 |
| Ref. Int. Demension (L x D x H) (in.) | 21 5/8 x 25 3/8 x 28 7/8 |
| Gross Weight (lbs.) | 187 |
| # of Shelves | 2 |
| Shelf Size (in.) | 20 1/2 x 23 3/4 |

Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.
* Depth does not include 2-1/2" for rear condensate enclosure.
† Height does not include 5" for caster height.

■ **WARRANTY : 3 Year Parts and Labor Warranty**
Additional 2 Year Warranty on Compressor


- Door locks standard
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Solid and sturdy grille design
- Legs available (optional)

■ **OPTIONAL ACCESSORIES :**

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: K1F9000103


PLAN VIEW

(unit : inch)

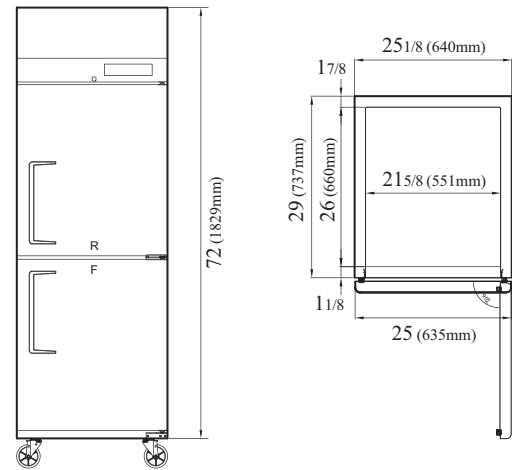

FRONT VIEW

TOP VIEW

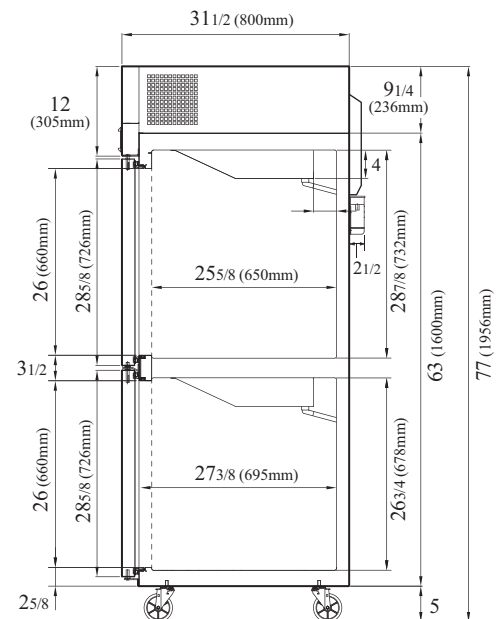

SIDE VIEW

Ver.20170725



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

