




Product Name	Soup Warmer	Quantity	Item #
<div>   <p>Works with standard soup tureens, 7qt (6.6L) and 11qt (10.4L). Adapter ring required to accommodate 7qt (6.6L) soup tureen.</p>  </div>			

Standard Features

- Drop-in round design, aluminum housing, heavy duty energy efficient electronics, high-impact polycarbonate top, stainless steel top ring for locating pan and providing finished look
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Induction unit shuts off and displays error codes enabling user to diagnose and correct minor problems
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Maximum temperature limit prevents damage to servingware, keeps food in the "safe zone"
- Four standard temperature settings 160, 170, 180, 190°F, Heat / 70, 75, 80, 90°C, Heat. More available via keypad accessibility.
- Separate re-therm setting delivers continuous maximum power until desired temperature is reached
- Integral timer alarms when pan present for user-selected interval
- Standard Cat 5e or Cat 6 patch cable from unit to control box is included. (MUST BE SHIELDED).
- Easy to clean polycarbonate top
- Works with standard 7qt (6.6L) or 11qt (10.4L) soup tureens. Adapter ring required to accommodate 7qt soup tureen.
- Lock feature prevents unwanted setting changes

- Red LED display for precise user control and feedback
- Available in 100-120VAC or 200-240VAC
- Can use two 100-120VAC units on a 15 amp circuit or three on a 20 amp circuit
- Can use four 200-240VAC units on a 15 amp circuit
- Boil Dry Detection
- Two-year limited warranty in US and Canada only - see statement for details
- Made in the USA*

Specifications

Shall be a CookTek drop-in Induction soup well unit, model _____ with a total kW rating of 1kW.

Unit shall be manufactured in the United States and constructed of an aluminum housing and a high-impact polycarbonate top.

Unit shall be built with an auto shut-off feature to prevent overheating, offer self-diagnostics, and have a pan maximizer feature to ensure maximum heating of any induction compatible pan.


Unit shall operate on _____ power with integral _____ cord and plug (supplied).

*of USA and imported parts

Global Operations
2801 Trade Center Drive
Carrollton, Texas 75007 USA
www.cooktek.com | www.turbochef.com

Phone: +1 800.908.8726
+1 214.379.6000
Fax: +1 214.379.6073

ISW06x 15210 USINTL

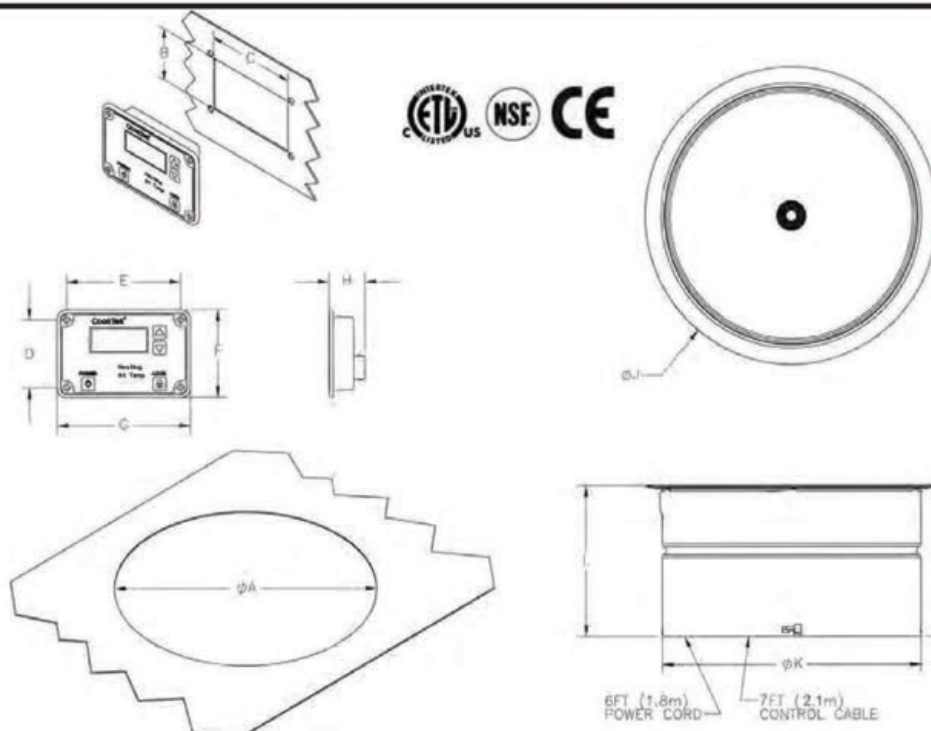

Dimensions		
	inches	mm
A	11.25	286
B	2.25	57
C	2.90	74
D	1.91	49
E	3.26	83
F	2.46	62
G	3.81	97
H	1.02	26
J	12.52	318
K	11.10	282
L	10.50	267
M	10.36	263

- Cooling clearance: 6" (152mm) below
- The maximum (do not exceed) ambient temperature is 50°C/122°F.

Specifications

Model Number	ISW061	ISW062
Power Requirements	100-120VAC, 1Ph	200-240VAC, 1Ph
Power Consumption	1000W (max)	1000W (max)
Voltage	100-120VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	7.5A (max)	3.67A (max)
Power Range	100-1000W	100-1000W
Temperatures	80, 150, 160, 165, 170, 175, 180, 185, 190, 200, 210, 220, 230, 240, 250°F/ 30, 40, 50, 60, 75, 85, 95, 100, 105, 110, 120°C	80, 150, 160, 165, 170, 175, 180, 185, 190, 200, 210, 220, 230, 240, 250°F/ 30, 40, 50, 60, 75, 85, 95, 100, 105, 110, 120°C
Dimensions (in)	12.52" X 10.50"	12.52" X 10.50"
Dimensions (mm)	318 X 267	318 X 267
Cutout Dimensions (in)	11.25"	11.25"
Cutout Dimensions (mm)	286	286
Weight	11.75 lbs / 5.3 kg	11.75 lbs / 5.3 kg
Packaged Weight	16 lbs / 7.3 kg	16 lbs / 7.3 kg
Packaged Dimensions	22" x 15" x 20"	22" x 15" x 20"
Packaged Dimensions	559 x 381 x 508	559 x 381 x 508
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 6-20Pin US/Canada - country specific elsewhere
Remote Control Box	7 ft / 2.1 m	7 ft / 2.1 m
Warranty	24-month limited parts and labor in U.S./Canada only - see statement for details	

Note: Ambient air should not exceed 50°C/122°F. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

Global Operations
2801 Trade Center Drive
Carrollton, Texas 75007 USA
www.cooktek.com | www.turbochef.com

Phone: +1 800.908.8726
+1 214.379.6000
Fax: +1 214.379.6073