

Hot Dog Corral | HDC



HDC-20



HDC-30A



HDC-35A



HDC-50A

Turn hot dogs from an afterthought to a must have by keeping them hot, fresh, and flavorful with the Hot Dog Corral by Antunes.

The Hot Dog Corral sears in the natural flavor of the hot dogs by basting them in their own juices as they move along the heated grill surface. The adjustable thermostat allows operations to easily maintain the grill temperature in order to keep hot dogs tasting fresh and delicious for up to six hours.

With only one moving part, the Hot Dog Corral is easy to operate, clean, and service, making it a great addition to operations of any size.


The small, compact size of the Hot Dog Corral makes it a great merchandiser for the front counter, where it can generate interest and boost impulse sales.

FEATURES

- Accommodates most sizes of hot dogs.
- Slanted grill surface for increased visibility.
- Precision thermostat for maintaining grill temperature.
- Easy to operate, clean, and service.
- Optional food shields available.
- Models available with a variety of capacities.

Hot Dog Corral | HDC

Dimensions

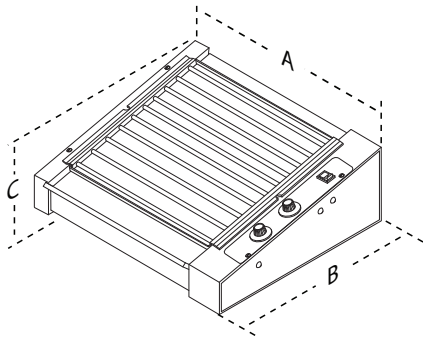

Model No.	Width (A)	Depth (B)	Height (C)
HDC-20	18 3/4"	21 1/2"	8 1/4"
HDC-20RC	(476 mm)	(545 mm)	(210 mm)
HDC-21A	23 1/8"	14 1/2"	7 1/4"
	(588 mm)	(368 mm)	(184 mm)
HDC-30A	22"	19 5/8"	7 1/4"
	(559 mm)	(498 mm)	(184 mm)
HDC-35A	33 3/8"	15 1/4"	7 1/4"
	(848 mm)	(387 mm)	(184 mm)
HDC-50A	32 1/2"	19 3/4"	7 1/4"
	(826 mm)	(502 mm)	(184 mm)

Shipping Dimensions

Model No.	Height	Width	Depth	Weight
HDC-20	14"	23"	28"	55 lbs.
HDC-20RC	(356 mm)	(584 mm)	(711 mm)	(25 kg)
HDC-21A	14"	21"	26"	38 lbs.
	(356 mm)	(533 mm)	(660 mm)	(17 kg)
HDC-30A	20"	23"	20"	55 lbs.
	(508 mm)	(584 mm)	(508 mm)	(25 kg)
HDC-35A	14"	21"	37"	50 lbs.
	(356 mm)	(533 mm)	(940 mm)	(23 kg)
HDC-50A	14"	26"	38"	62 lbs.
	(356 mm)	(660 mm)	(965 mm)	(28 kg)

Electrical Ratings and Plug Configuration

Model & Mfg. No.	Volts	Watts	Amps	Hertz	Plug Description
------------------	-------	-------	------	-------	------------------

Capacity: 20 Standard Hot Dogs

HDC-20 9300300	120	1000	8.3	50/60	NEMA 5-15P 20 Amp., 120 Volt
HDC-20 9300302	230	1000	4.4	50/60	CEE 7/7 16 Amp., 250 Volt
HDC-20 9300303	230	1000	4.4	50/60	BS 1363 Fused 13 Amp., 250 Volt
HDC-20RC 9300306	120	1000	8.3	50/60	NEMA 5-15P 20 Amp., 120 Volt
HDC-20RC 9300307	230	1000	4.4	50/60	BS 1363 Fused 13 Amp., 250 Volt
HDC-20RC 9300308	230	1000	4.4	50/60	CEE 7/7 16 Amp., 250 Volt

Capacity: 21 Standard Hot Dogs

HDC-21A 9300320	120	1000	8.3	50/60	NEMA 5-15P 20 Amp., 120 Volt
HDC-21A 9300322	230	1200	5.2	50/60	CEE 7/7 16 Amp., 250 Volt
HDC-21A 9300323	230	1200	5.2	50/60	BS 1363 Fused 13 Amp., 250 Volt

Capacity: 30 Standard Hot Dogs

HDC-30A 9300330	120	1500	12.5	50/60	NEMA 5-15P 20 Amp., 120 Volt
HDC-30A 9300332	230	1500	6.5	50/60	CEE 7/7 16 Amp., 250 Volt
HDC-30A 9300333	230	1500	6.5	50/60	BS 1363 Fused 13 Amp., 250 Volt

Capacity: 35 Standard Hot Dogs

HDC-35A 9300340	120	1750	14.6	50/60	NEMA 5-15P 20 Amp., 120 Volt
--------------------	-----	------	------	-------	---------------------------------

Capacity: 50 Standard Hot Dogs

HDC-50A 9300350	120	1750	14.6	50/60	NEMA 5-15P 20 Amp., 120 Volt
HDC-50A 9300351	230	1750	7.6	50/60	BS 1363 Fused 13 Amp., 250 Volt
HDC-50A 9300352	230	1750	7.6	50/60	CEE 7/7 16 Amp., 250 Volt

P/N 1020224 08/17