

Job: _____

Item: _____

Quantity: _____

FIFO Can Rack

APPLICATION:

These can racks automatically rotate stock and can be loaded and retrieved from the front.

MATERIAL:

- Framework is constructed out of 1½" x 1½" x .070" wall tubing.
- Can guides are constructed out of 2" x 2" x .125" wall angle.

CASTERS:

- Mobile units come equipped with 6" platform type casters, two swivel with brake and two rigid.

GUARANTEE:

- Lifetime Guarantee against rust and corrosion .
- Five-Year Guarantee against workmanship and material defects.



#97294CK




#97294



Model No.	Size W-H-D	Can Capacity #10	Ship Lbs.
Stationary Unit - NSF Approved			
97294	27 1/8" x 79 1/2" x 42"	156	171
Four NSF Certified Adjustable Feet			
Mobile Unit - Not NSF Approved			
97294CK	27 1/8" x 81 1/8" x 42"	156	191
Four 6" plate type casters; two swivel w/ brake (#C495), two rigid (#C500).			

Options:

0117 Adjustable Feet - Replacement.

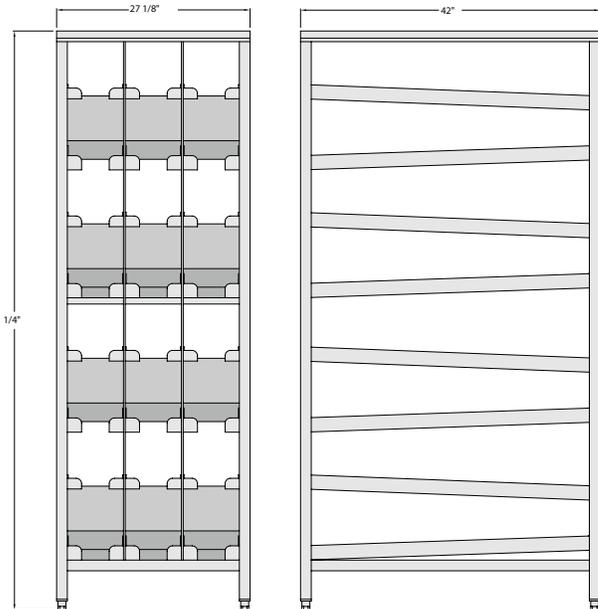

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.



Distributed by: