



Warewashing Systems

Delta[®] 5-E

Project _____
 Item _____
 Quantity _____
 CSI Section 11400 _____
 Approval _____
 Date _____

Delta[®] 5-E

Models
Delta[®] 5-E



Standard Features

- Functions as both a glass-washer and a dishwasher, accommodating wares up to 11-1/2" (292 mm) high
- Push-button start
- Electromechanical controls
- Easily accessible controls
- Built-in chemical pumps and priming switches
- Stainless steel wash pump
- Lower rotary wash arm and fixed upper jets
- Door switch
- Adjustable bullet feet
- Swing-out control box for easy service and access
- Side control panel for easy access to switches
- Dial temperature gauge for constant monitoring of temperature
- Side skirt panels
- Latch-type front (lower) panel
- Delime/manual wash switch

Options

- Water Hammer Arrestor
- Scale Prevention System (SPS)
- Replacement Cartridge for SPS

Accessories

- 36-Compartment Rack
 - 4-1/8" tall (105 mm)
 - 5-5/8" tall (143 mm)
 - 7" tall (178 mm)
- Combination Rack
- Peg Rack
- Flat Rack
- Half Rack


Specifications

- | | |
|---------------------------------------------------------|----------------------------------------------------------------------------------------|
| Uses only 1.16 gallons (4.39 liters) of water per cycle | 11-1/2" (292 mm) wash chamber clearance |
| Cleans 40 racks per hour | Gravity drain |
| 1,440 glasses per hour | Built-in waste accumulator |
| 90-second operating cycle | Sustaining heating element maintains final rinse between 120°F (49°C) and 140°F (60°C) |
| Powerful 1 hp wash pump motor | Removable end plugs on lower wash arm and removable upper jets |
| Built-in chemical pumps and priming switches | Durable stainless steel construction |
| Air-gap water inlet | |



Intertek



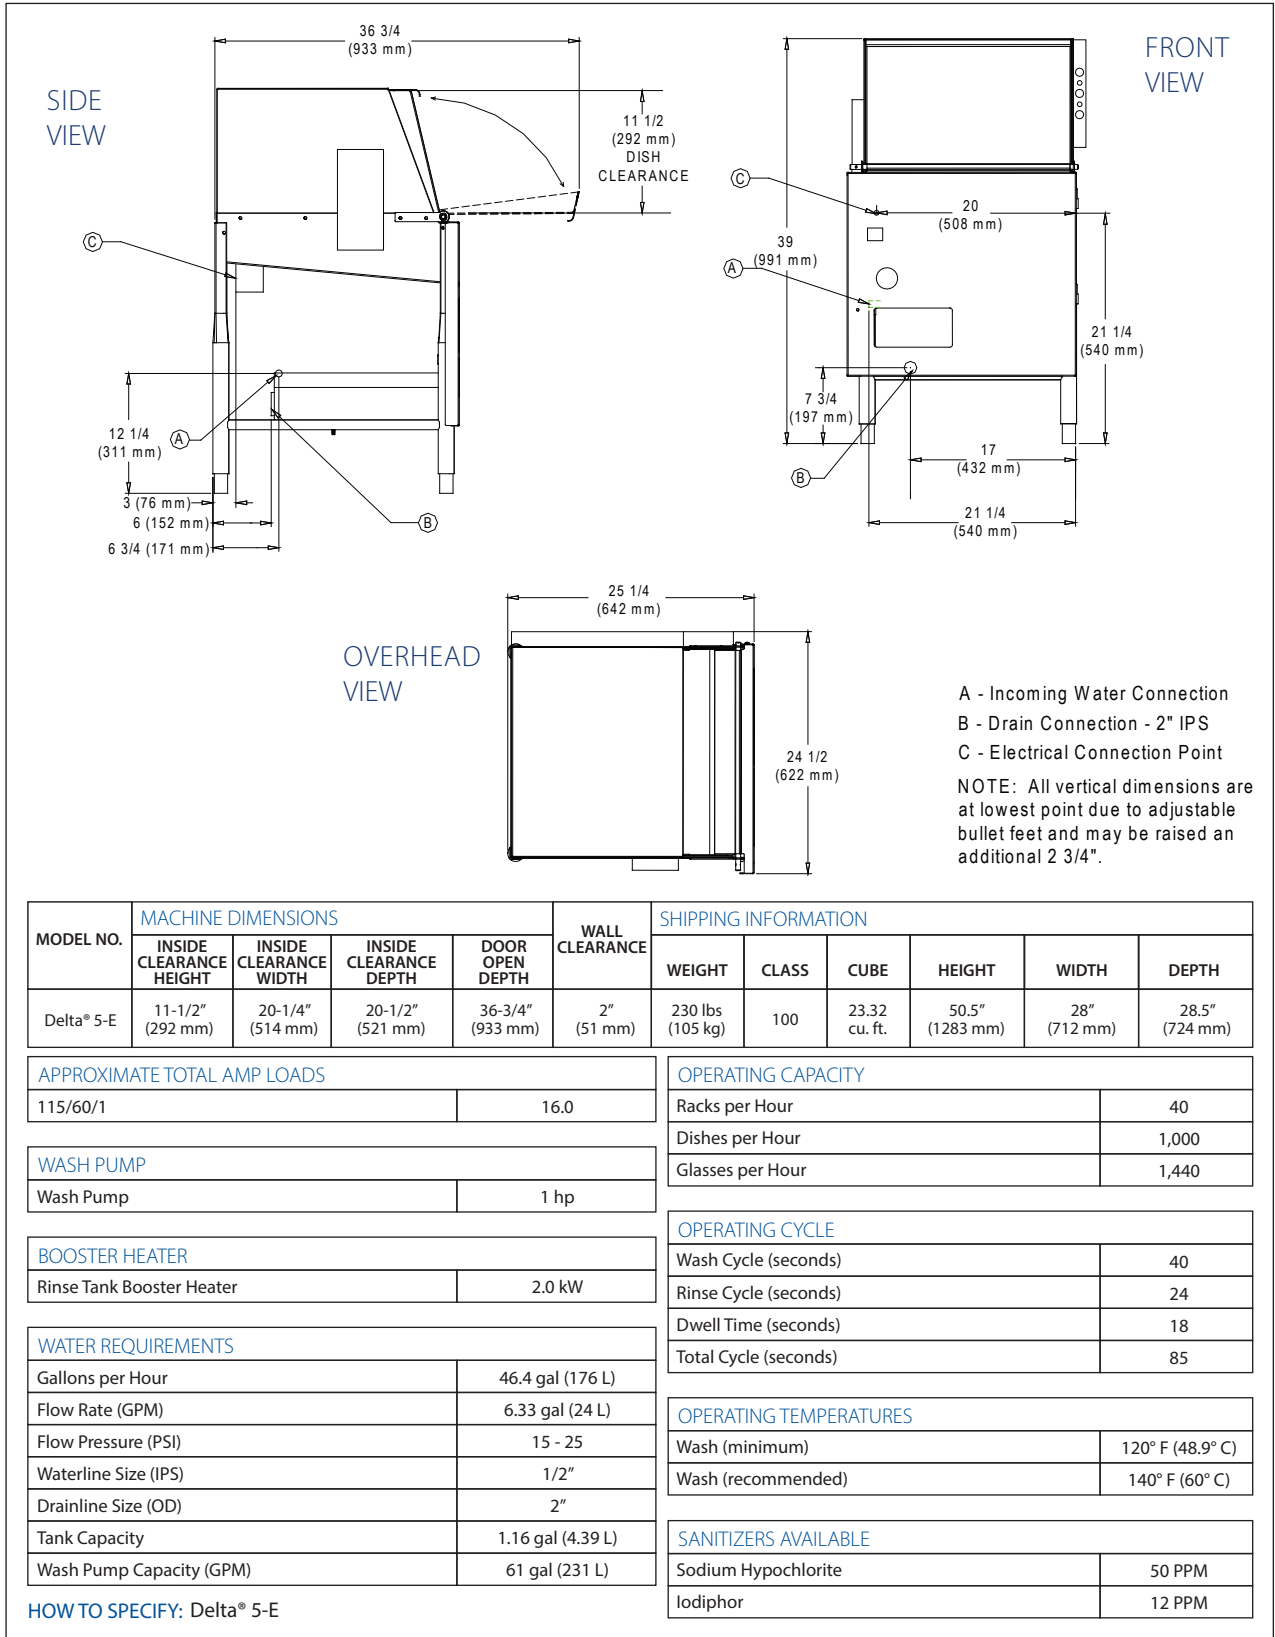

Jackson WWS, Inc.
 Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734
 Mailing Address: P.O. Box 1060, Barbourville, KY 40906
 Telephone: 888-800-5672 • Fax: 606-523-1799
 Email: info@jacksonwws.com
 07610-004-13-56 [03/31/17]

www.jacksonwws.com