

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

### LV LUMAVUE™ MERCHANDISERS

LV38HC Black Sliding Glass Door Model Hydrocarbon Series MODELS: LV38HC-1-B



LV38HC-1-B

#### **OPTIONS & ACCESSORIES**

- ☐ White or stainless steel exterior
- ☐ Black or stainless steel interior
- □ Door locks
- Wine rack
- ☐ Wine temperature model available
- Extra shelves
- ☐ 3", 6" Casters or 6" legs
- Remote
- ☐ Gravity flo kit
- Custom graphics and signage

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Standard cabinet exterior finish is heavy duty steel with a Black baked on durable coating
- Heavy duty interior construction includes white coated steel walls
- Full electronic control
- Modern one piece grille
- Double pane lowE argon filled glass doors feature inside and outside panes that are tempered for added safety
- Sliding glass door models have black frames regardless of exterior finish
- Hold open feature is standard
- Five (5) epoxy coated shelves per section, standard
- Brightly lighted sign panel
- LED lighting
- Whisper quiet refrigeration system
- Maintains product temperatures between 32°-40°F

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric evaporator
- Epoxy coated evaporator coil




















MODEL	LV38HC-1-B
EXTERNAL DIMENSIONAL DATA	
Width Overall	43 1/2"
Depth Overall	32 1/4"
Height Overall	78"
Number of Doors	2
Shelf Area (sq. in)	408 1/2"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	35.37
Internal Width Overall (in)	40 3/8"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	61 5/8"
Internal Height Useable (in)	53"
Number of Shelves	10
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)*	2392
WEIGHT DATA	
Gross Weight (Crated lbs)	502 lbs
Height - Crated	85"
Width - Crated	46"
Depth - Crated	35"

# **Glass Door Merchandisers - Sliding Door Models**

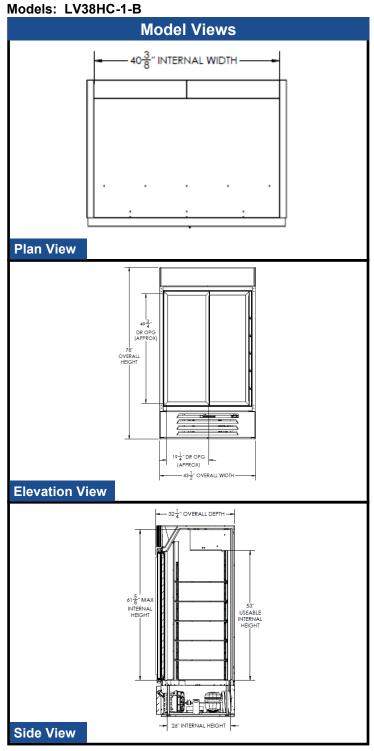

## **ELECTRICAL CONNECTION**

















Units pre-wired at factory and include 8' long cord and plug set.



