Creation Express™

Mobile Cooking Station



Add Efficiency And Safety To Your Demonstration Cooking

Benefits

- Flameless stoves provide safe efficient cooking
- State-of-the-art induction stoves are cool to the touch
- Mobility allows flexibility of cooking location

Features

- One-. two- and three-stove models available
- Built-in downdraft exhaust filtration system available
- ETL listed electrical components.
- Textured and solid color laminate exterior finishes available

Casters

 Non-marking cushion tread 5", all-swivel, two with brake





Optional Breath Guard



Optional Fold-Down Shelf





Specifications:

Shall be Lakeside Model 20__, and shall be of welded stainless steel construction, with decorative laminate exterior and hinged doors. Unit shall feature __ (1, 2, or 3) drop-in style induction or infrared stoves, with cooking controls mounted above doors on the side of cabinet. Magnetic induction stove(s) shall require 120 VAC, 12.8 amp (each), with 1800 watt output, easy to read LED power level indicators, and shall be ETL listed. Stoves shall include ceramic glass cooking surface, and control(s) shall feature variable cooking and holding functions. Unit top shall be of 16 gauge type 304 stainless steel, and unit sides shall be of 18 gauge stainless steel. Doors shall be of 47# high-density resin particle board with laminate finish, and shall be mounted with heavy-duty concealed, interior mounted cabinet hinges. Choice of standard laminate exterior finishes shall be included. Cabinet shall feature an 18 gauge stainless steel welded interior storage shelf. Casters shall be heavy-duty 5" all-swivel, two with brake, with rounded cushion tread non-marking tires. Casters shall be mounted to 4" wide channel style crossmembers of 14 gauge stainless steel. Unit base shall consist of 14 gauge crossmembers and channel style runners.

Filtration System:


Shall include (1 or 2) built-in downdraft air filtration unit(s) for cooking exhaust, with intake vents mounted to the back of the cooking surface. Filtration units shall feature 3-stage exhaust filtration system, including grease/particulate, smoke/fine particle, and gas/odor removal stages. Filtration unit(s) shall be UL and ANSI listed, and shall be mounted on pull-out glide mechanism to provide easy access for filter maintenance.



Lakeside Manufacturing, Inc. 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A. 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Creation Express™

Mobile Cooking Station

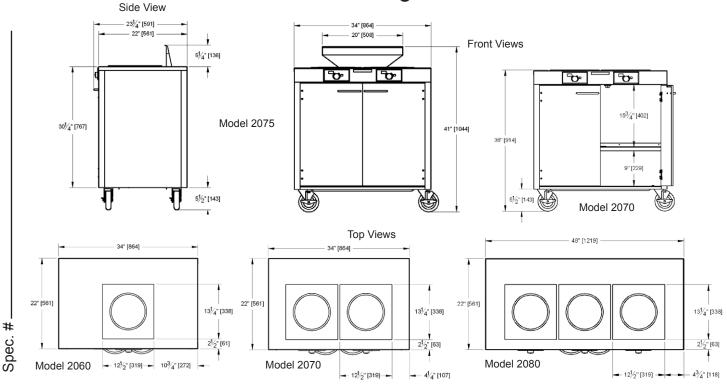

Product Information:

Model	Number Of Stoves Filters		Overall Size W L H			Ship Weight Lbs Kg	
	Stoves	riiteis	VV	L	П	LUS	Kg
2060	1	-	34" (864	22" 559	35½" 901)	110	50
2070	2	-	34" (864	22" 559	35½" 901)	120	55
2080	3	-	48" (1219	22" 559	35½" 901)	210	96

Model	Number Of		Overall Size			Ship Weight	
Wodei	Stoves	Filters	W	L	Н	Lbs	Kg
2065	1	1	34" (864	22" 559	40½" 1028)	154	70
2075	2	1	34" (864	22" 559	40½" 1028)	164	75
2085	3	2	48" (1219	22" 559	40½" 1028)	298	136

Measurements in () indicate metric millimeters, unless noted.

Electrical Information

Models with two or three stoves feature a power management package as standard and require 220 VAC 50 amp circuit with NEMA 14-50P plug. On units that do not include the power management package, each 120 VAC stove requires its own 20 amp circuit. Filter(s) can be included on each circuit. Units are available without power management package.

Options:

- □ 220 VAC (2600W) induction stove(s)
- Custom laminate finish exterior: _

Available Finishes



Finishes:

■ Walnut

□ Light Maple

- ☐ Gray Sand
- □ Red Maple
- □ Beige Suede
- □ Hard Rock Maple □ Black
- □ Purple □ Red
 - - ☐ Green
- Other



☐ Victorian Cherry ☐ Royal Blue

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A. 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Lit# CREX 1114