


Open Pan & Tray Racks

Aluminum



Model 8528

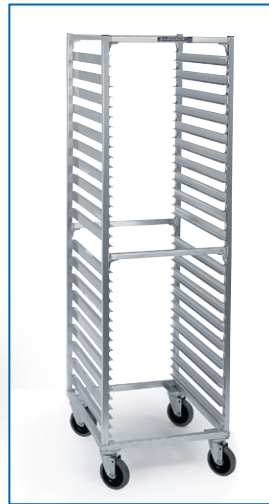

Model 8559

Durable, efficient storage system with all-welded aluminum construction

Benefits

- Light-weight aluminum is rust-proof
- Welded construction

Features

- Channel and angle style ledges are continuously welded to the uprights to withstand rugged use.
- Reinforced bottom design provides added durability during offsite transport.
- Accommodates 18" x 26" or 14" x 18" pans and trays.
- NSF listed.

Casters

- Heavy-duty 5" plate-mount with non-marking poly wheels



Specifications:


Shall be constructed of hi-tensile, corrosion-resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy. All seams shall be heli-arc welded and sealed (no rivets). Tray ledges 1-1/4" x 1-5/8" x .100 extruded aluminum welded to frame on 3" or 5" centers, with channel type ledges to be on 11 1/2" centers. Unit shall have four horizontal supports located at the top and center of 1" x 1" x .070 wall aluminum tube. Corner gussets of 1-1/2" x 1-1/2" x 5/8" thick angle shall be welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights with a 4 1/2" continuous weld. Unit base shall be constructed of 1" x 1" x .070 wall tube welded into a rectangular frame (20-1/2" x 26"), with two extra laterals where caster mount reinforcement plates shall be inset. reinforcement caster plates (2-3/4" x 4" x 3/8"), pre-tapped for 1/4" bolts, shall be welded to this frame. Casters shall be plate mount type, with 5" diameter non-marking polyurethane wheel, full swivel design with sealed ball bearing races.

Spec. # _____

AIA # _____

Open Pan & Tray Racks

Aluminum

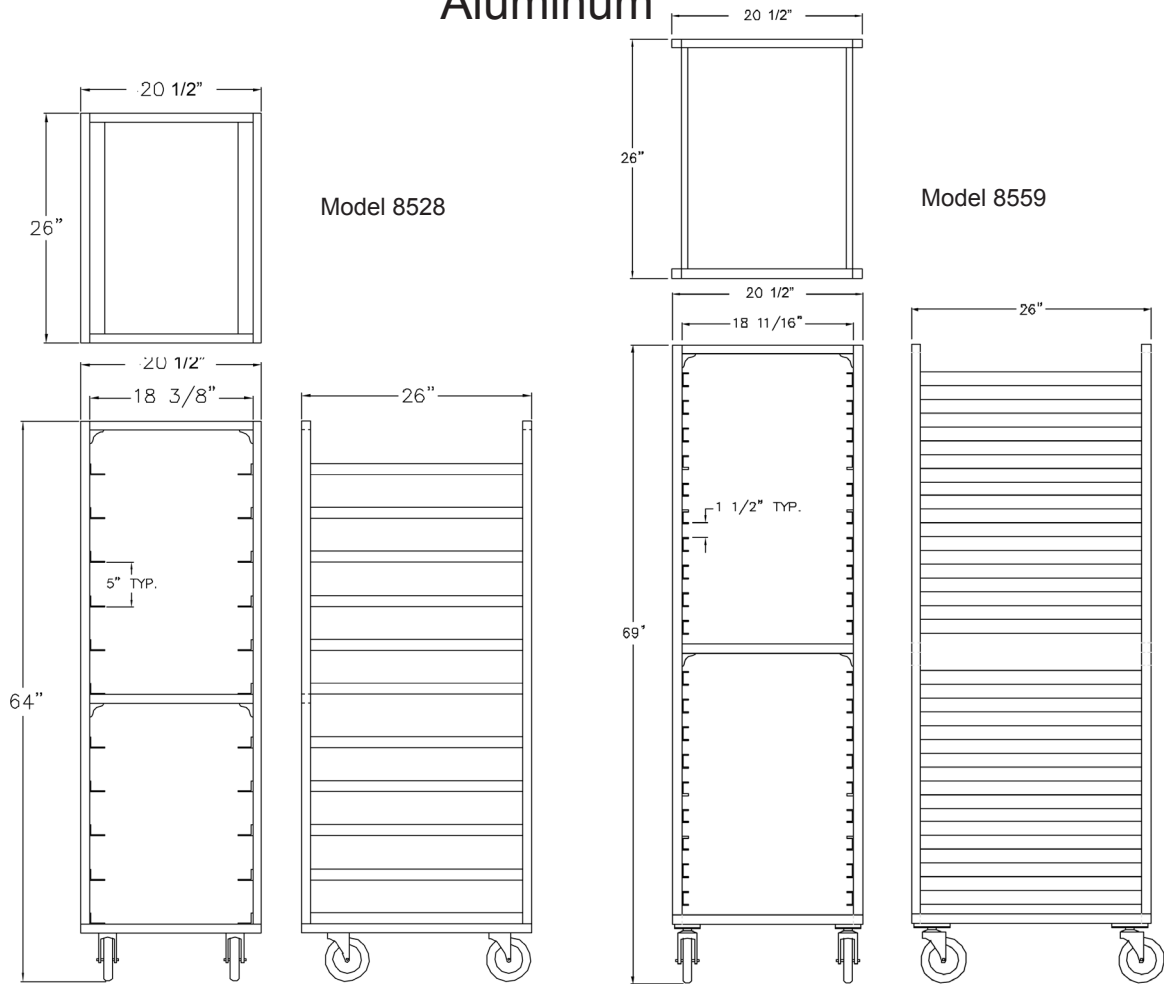

Dimensions:

| Model | Pan/Tray Capacity | | Ledge | | Overall Size | | | Case Wt. |
|-------|-------------------|-----------|---------|-------------|---------------|------------|-------------|-----------------|
| | Full Size | Half Size | Type | Spacing | W | L | H | Lbs. |
| 8522 | 18 | 36 | Angle | 3" (76) | 20½" (521) | 26" 660 | 63" 1600 | 42 (18.9 kg) |
| 8528 | 11 | 22 | Angle | 5" (127) | 20½" (521) | 26" 660 | 64" 1626 | 38 (17.1 kg) |
| 8529 | 18 | 36 | Angle | 3" (76) | 20½" (521) | 26" 660 | 64" 1626 | 48 (21.6 kg) |
| 8547 | 34 | 68 | Channel | 1½" (38) | 20½" (521) | 26" 660 | 64" 1626 | 53 (23.9 kg) |
| 8559 | 38 | 76 | Channel | 1½" (38) | 20½" (521) | 26" 660 | 69" 1753 | 56 (25.2 kg) |

Dimensions in () denote metric millimeters, unless otherwise noted.

Options:

- Break casters (set of 2)
- Perimeter bumper
- Vertical leg bumpers (set of 4)
- Pan stop
- Bottom corner bumpers (set of 4)
- Solid sheet base



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com