



Camshelving® Premium Series

High Density Storage Floor Track System Full Track and Track Extension Kits

HEIGHT	DEPTHS	LENGTHS	
2	2	5	
67"	21"	36"	54"
75"	24"	42"	60"
		48"	

- **High Density Mobile Starter Units include:**
2 factory assembled mobile post kits, 8 shelf traverses, shelf plates, 4 high density casters, and 4 high density donut bumpers. Units ship complete in 1 box.
- **High Density Full Track Kits include:**
Aluminum raised tracks, steel joiners, stationary unit end plates and leveling feet, pan head screws, and star washers.
- **High Density Track Kits include:**
Aluminum raised tracks and steel joiners.



camguard
ANTIMICROBIAL SHELF PLATES

Features & Benefits

- Increase storage capacity by adding storage aisles in open floor space. System composed of stationary starter units anchored to raised floor track system at each end with high density mobile units installed on tracks.
- Use in walk-in coolers, freezers, dry storage areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts. NOTE: Mobile units require Mobile Posts for assembly.
- Premium high density grooved caster rolls securely and easily on raised track.
- High density donut bumpers offer added protection when maneuvering high density mobile units back and forth on the track.
- Aluminum grooved track rails connect to bottom of stationary units with easy to install stainless steel hardware. No bolts, glue or drilling required.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised.
- Aluminum raised floor track and stainless steel hardware are rust resistant. Track provides smooth and level surface for mobile units and is designed for easy cleaning.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____



Stationary Unit


High Density Mobile Units

Stationary Unit

High Density Storage Floor Track System

4 Shelf Unit Weight Bearing Chart

Mobile Unit

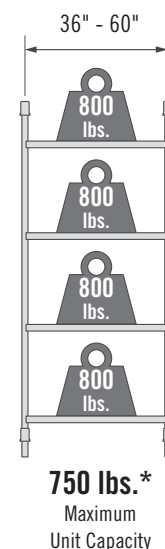

* Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 750 lbs.

- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Recommend installing a stationary unit every 15' of track to stabilize system.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Approvals



COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

Camshelving® Premium Series

High Density Storage Floor Track System Full Track and Track Extension Kits

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

V4 4-Shelf Vented High Density Mobile Units

67"
HEIGHT

21"
DEPTH

CODE	DIMENSIONS D x L x H
CPHU213667V4	21" x 36" x 67"
CPHU214267V4	21" x 42" x 67"
CPHU214867V4	21" x 48" x 67"
CPHU215467V4	21" x 54" x 67"
CPHU216067V4	21" x 60" x 67"

24"
DEPTH

CPHU243667V4	24" x 36" x 67"
CPHU244267V4	24" x 42" x 67"
CPHU244867V4	24" x 48" x 67"
CPHU245467V4	24" x 54" x 67"
CPHU246067V4	24" x 60" x 67"

75"
HEIGHT

21"
DEPTH

CODE	DIMENSIONS D x L x H
CPHU213675V4	21" x 36" x 75"
CPHU214275V4	21" x 42" x 75"
CPHU214875V4	21" x 48" x 75"
CPHU215475V4	21" x 54" x 75"
CPHU216075V4	21" x 60" x 75"

24"
DEPTH

CPHU243675V4	24" x 36" x 75"
CPHU244275V4	24" x 42" x 75"
CPHU244875V4	24" x 48" x 75"
CPHU245475V4	24" x 54" x 75"
CPHU246075V4	24" x 60" x 75"

Color: Speckled Gray (480).

S4 4-Shelf Solid High Density Mobile Units

21"
DEPTH

CODE	DIMENSIONS D x L x H
CPHU213667S4	21" x 36" x 67"
CPHU214267S4	21" x 42" x 67"
CPHU214867S4	21" x 48" x 67"
CPHU215467S4	21" x 54" x 67"
CPHU216067S4	21" x 60" x 67"

24"
DEPTH

CPHU243667S4	24" x 36" x 67"
CPHU244267S4	24" x 42" x 67"
CPHU244867S4	24" x 48" x 67"
CPHU245467S4	24" x 54" x 67"
CPHU246067S4	24" x 60" x 67"

21"
DEPTH

CODE	DIMENSIONS D x L x H
CPHU213675S4	21" x 36" x 75"
CPHU214275S4	21" x 42" x 75"
CPHU214875S4	21" x 48" x 75"
CPHU215475S4	21" x 54" x 75"
CPHU216075S4	21" x 60" x 75"

24"
DEPTH

CPHU243675S4	24" x 36" x 75"
CPHU244275S4	24" x 42" x 75"
CPHU244875S4	24" x 48" x 75"
CPHU245475S4	24" x 54" x 75"
CPHU246075S4	24" x 60" x 75"

Color: Speckled Gray (480).

Optional Accessories

- ☐ Donut Bumper
- ☐ Shelf Identification Tags
- ☐ Shelf Divider Panel
- ☐ Shelf Divider Bars (Straight or Angled)
- ☐ Shelf Rails (Single or Double)
- ☐ Tray Sliding Rack
- ☐ Single Shelf Security Cage
- ☐ Shelf Traverses (Single or Double)
- ☐ Drying and Storage Cradles

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
Post Connectors: Reinforced polypropylene.
Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.
Raised Grooved Rail: Aluminum.
Track Hardware: Stainless Steel.
High Density Caster: Polyolefin resin with zinc plated post.

Full Track and Extension Kits

CODE	DESCRIPTION
Floor Track Kit	
CSMHDTK10	10' Track for 3 Mobile Units*
CSMHDTK12	12' Track for 4 Mobile Units*
CSMHDTK145	14.5' Track for 5 Mobile Units*
Floor Track Extension	
CSMHDTKE4	4.5' Track Extension
CSMHDTKE5	5' Track Extension
CSMHDTKE6	6' Track Extension

Case Pack: 1 Color: Silver (000).

*Based on 24" deep mobile units.

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com
Printed in USA. REV. 08/16

PS11

D081607