



# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Vented Shelves

HEIGHT	DEPTHS	LENGTHS	
1	3	8	
72"	18"	24"	48"
	21"	30"	54"
	24"	36"	60"
		42"	72"

- **Starter Units include:**  
2 factory assembled post kits, 8 or 10 shelf traverses and shelf plates.
  - **Add-On Units include:**  
1 factory assembled post kit, 8 or 10 shelf traverses and shelf plates.
- All units ship complete in 1 box, except 72" long units which ship in kits (post kits are unassembled) due to overall unit weight.



### Features & Benefits

- Designed for use in high-volume operations with constant loading of heavy products and frequent daily deliveries.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised and space is maximized. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units. Unique patented design ensures maximum space utilization.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_




Stationary Starter Unit



Stationary Add-On Unit

## 4 Shelf Unit Weight Bearing Chart

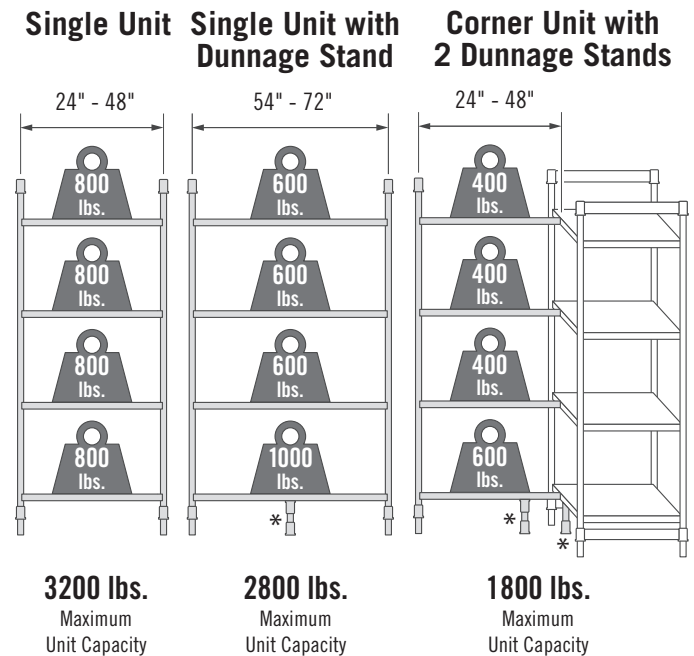

\* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.



Information and specifications are subject to change without notice. Please confirm at time of order.  
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.  
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com  
Printed in USA. REV. 08/16

# Camshelving® Premium Series

## Stationary Starter & Add-On Units 4 or 5 Vented Shelves

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_



AIA File / Spec No. \_\_\_\_\_

Job \_\_\_\_\_

**72"**  
HEIGHT

**V4**

### 4-Shelf Vented Units Starter Add-On



**18"**  
DEPTH

LENGTH	CODE
24"	CPU182472V4
30"	CPU183072V4
36"	CPU183672V4
42"	CPU184272V4
48"	CPU184872V4
54"	CPU185472V4
60"	CPU186072V4
72"	CPU187272V4PKG

LENGTH	CODE
22½"	CPA182472V4
28¾"	CPA183072V4
34¾"	CPA183672V4
40¾"	CPA184272V4
46¾"	CPA184872V4
52¾"	CPA185472V4
58¾"	CPA186072V4
70¾"	CPA187272V4PKG

**21"**  
DEPTH

24"	CPU212472V4
30"	CPU213072V4
36"	CPU213672V4
42"	CPU214272V4
48"	CPU214872V4
54"	CPU215472V4
60"	CPU216072V4
72"	CPU217272V4PKG

22½"	CPA212472V4
28¾"	CPA213072V4
34¾"	CPA213672V4
40¾"	CPA214272V4
46¾"	CPA214872V4
52¾"	CPA215472V4
58¾"	CPA216072V4
70¾"	CPA217272V4PKG

**24"**  
DEPTH



24"	CPU242472V4
30"	CPU243072V4
36"	CPU243672V4
42"	CPU244272V4
48"	CPU244872V4
54"	CPU245472V4
60"	CPU246072V4
72"	CPU247272V4PKG

22½"	CPA242472V4
28¾"	CPA243072V4
34¾"	CPA243672V4
40¾"	CPA244272V4
46¾"	CPA244872V4
52¾"	CPA245472V4
58¾"	CPA246072V4
70¾"	CPA247272V4PKG

Color: Speckled Gray (480).

**V5**

### 5-Shelf Vented Units Starter Add-On



LENGTH	CODE
24"	CPU182472V5
30"	CPU183072V5
36"	CPU183672V5
42"	CPU184272V5
48"	CPU184872V5
54"	CPU185472V5
60"	CPU186072V5
72"	CPU187272V5PKG

LENGTH	CODE
22½"	CPA182472V5
28¾"	CPA183072V5
34¾"	CPA183672V5
40¾"	CPA184272V5
46¾"	CPA184872V5
52¾"	CPA185472V5
58¾"	CPA186072V5
70¾"	CPA187272V5PKG

24"	CPU212472V5
30"	CPU213072V5
36"	CPU213672V5
42"	CPU214272V5
48"	CPU214872V5
54"	CPU215472V5
60"	CPU216072V5
72"	CPU217272V5PKG

22½"	CPA212472V5
28¾"	CPA213072V5
34¾"	CPA213672V5
40¾"	CPA214272V5
46¾"	CPA214872V5
52¾"	CPA215472V5
58¾"	CPA216072V5
70¾"	CPA217272V5PKG

24"	CPU242472V5
30"	CPU243072V5
36"	CPU243672V5
42"	CPU244272V5
48"	CPU244872V5
54"	CPU245472V5
60"	CPU246072V5
72"	CPU247272V5PKG

22½"	CPA242472V5
28¾"	CPA243072V5
34¾"	CPA243672V5
40¾"	CPA244272V5
46¾"	CPA244872V5
52¾"	CPA245472V5
58¾"	CPA246072V5
70¾"	CPA247272V5PKG

### Optional Accessories

- Corner Connector Sets
- Bottom Shelf Dunnage Stands (Low or Tall)
- Shelf Identification Tags
- Wall Fastener
- Seismic Foot
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Shelf Rails (Single or Double)
- Tray Sliding Rack
- Single Shelf Security Cage
- Full Wrap Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

### Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.  
 Post Connectors: Reinforced polypropylene.  
 Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.  
 Corner Connectors: Reinforced nylon.  
 Adjustable Foot: Reinforced nylon.

### Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

**CAMBRO**  
 TRUSTED FOR GENERATIONS™  
 www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.  
 © Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.  
 Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com  
 Printed in USA. REV. 08/16

**PS3**

D081602