



TILTING BRAISING PAN

ELECTRIC MODELS BPM-15EC & BPM-15EA

Braising pan shall be a Groen electric heated manual tilting 15 gallon BPM Series (specify Classic or Advanced controls) model with 8" deep pan body with 3" radius corners, 5/8" thick stainless steel clad cooking surface mounted on open leg stand with height-adjustable bullet feet.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

AVAILABLE MODELS:

CLASSIC CONTROLS:

BPM-15EC (15 GALLON)

ADVANCED CONTROLS:

BPM-15EA (15 GALLON)

CONSTRUCTION: The pan body shall be of type 304 stainless steel, solid one-piece welded heavy-duty construction, with 8" pan depth. All exposed surfaces shall be stainless steel. The cooking surface is a heavy 5/8" thick stainless steel clad plate fitted with flat bar electric heating elements, ensuring efficient heat transfer over the entire cooking surface. The heavy plate prevents warping or distortion. Controls and tilt mechanism are mounted in a stainless steel water resistant IPX6-rated housing, on right side of the pan body. Braising pan shall come standard with mounting bracket for either right-side, left-side or right-rear faucet mounting. Graduated fill-level marks in both gallons and liters are standard.

FINISH: Interior of braising pan shall be polished to a 100 emery grit finish. Exterior of braising pan shall have a #3 finish, ensuring maximum ease in cleaning and maintaining appearance.

SANITATION AND NSF LISTING: Braising pan shall be designed and constructed to be NSF-listed, meeting all known health department and sanitation codes. True open leg tubular stand design and 3" radius pan interior make cleaning easier.

UL LISTING: Braising pan shall be UL- and cUL-listed.

MANUAL TILT: The braising pan shall have a smooth-action, quick-tilting body with manual crank and worm-and-gear tilt mechanism, which provides precise control during pouring of pan contents. Pan body shall tilt to vertical in 24 turns and past vertical to assist in cleaning.

CONTROLS: All controls to be located in a right-front mounted water resistant (IPX6 rated) enclosure: **Classic -C Models** include: Power ON-OFF switch with indicator light, temperature control knob with 175 to 400°F (79 to 204°C) range increments and HEAT(ing) indicator light; **Advanced -A Models** include: Power ON-OFF switch with indicator light, temperature and time set knob (175 to 400°F/79 to 204°C range), LED display of set temperature or cook time, HEAT(ing) indicator light, buttons for reset of Low Temp and High Temp presets, MANUAL mode button for knob-setting of pan temperature, and TIMER-set button with indicator light.

PERFORMANCE/FEATURES: Braising pan shall be equipped with controls that allow operation at 7-degree angle to facilitate griddling. Braising pan shall be thermostatically-controlled for automatic shut-off when desired temperature is reached and automatic power ON when temperature falls below desired setting. Braising pan to have high limit thermostat as safety feature.

INSTALLATION: One electrical connection required. Specify 208, 240 or 480 Volt electrical service. All units ship three-phase, and are field convertible to single-phase operation.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.

Electric heated open leg, manual tilting 15 gallon capacity braising pans. BPM-15EA Model shown.




OPTIONS/ACCESSORIES:

- Single pantry water faucet
- Double pantry water faucet
- Single or double pantry faucet with spray hose assembly (48" or 60")
- 2" tangent drawoff (option must be ordered with unit)
- Strainer for tangent drawoff valve
- Pouring lip strainer
- Flanged kit
- Caster kit w/restraint cable
- Steamer pan inserts



P/N 175849 REV B

ELECTRICAL REQUIREMENTS			
REQ'D VOLTAGE	BPM-15E		Kw
	PHASE	AMPS	
208	1	37	7.7
	3	22	
240	1	32	7.7
	3	19	
440	3	9	6.4
	3	10	7.6

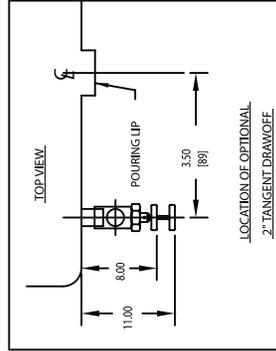

CLASSIC CONTROL



ADVANCED CONTROL

- NOTES:
1. DIMENSIONS IN BRACKETS [] ARE MM.
 2. BULLET FEET SUPPLIED FRONT & REAR
 3. ELECTRICAL CONNECTION: 1.75" DIA. [44] HOLE
 4. OTHER VOLTAGES AND PHASES ARE AVAILABLE.
 5. FAUCET BRACKET MAY BE INSTALLED ON LEFT OR RIGHT SIDE.
 6. FAUCET MAY BE INSTALLED ON FAUCET BRACKET OR ON REAR AS SHOWN.
 7. OPTIONAL FLANGED FEET OR CASTERS AVAILABLE
 8. TETHER REQUIRED WITH CASTERS TO SECURE UNIT

