Outperform every day.™

Project:

Item Number:

Quantity:

HEATED DISPLAY CABINETS

Drop-in Cabinet

Curved Cabinet

Front Access Curved Cabinet

Cubed Cabinet

Heated Display Cabinets

DESCRIPTION

Vollrath's heated drop-in and countertop display cabinets enhance the presentation of hot food items. Drop-in models have sliding rear doors for easy access for selling, refilling, changing displays and end-of-day cleaning. Countertop cabinets are available with front and rear access or rear access only.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Agency Listings

Intertek Intertek

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

MODELS

40845 HDE7136 36" Drop-in Display Cabinet
40846 HDE7148 48" Drop-in Display Cabinet
40847 HDE7160 60" Drop-in Display Cabinet
40855 HDE8136 36" Curved Cabinet
40883 HDE8336 36" Curved Cabinet with Front Access
40856 HDE8148 48" Curved Cabinet
40884 HDE8348 48" Curved Cabinet with Front Access
40857 HDE8160 60" Curved Cabinet
40885 HDE8360 60" Curved Cabinet with Front Access
40865 HDE8236 36" Cubed Cabinet
40890 HDE8436 36" Cubed Cabinet with Front Access
40866 HDE8248 48" Cubed Cabinet
40891 HDE8448 48" Cubed Cabinet with Front Access
40867 HDE8260 60" Cubed Cabinet
40892 HDE8460 60" Cubed Cabinet with Front Access

FEATURES

- Inside lighting strips located both at the top of the cabinet and underneath the upper shelf create optimum food display throughout cabinet
- Dual fans circulate air throughout unit to ensure even temperature control
- Triple-glazed front glass gives added strength and insulation
- Drop-in and curved cabinets have two shelves. The cubed cabinet has 3 shelves
- Lift-and-remove rear sliding doors for easy display changes and end of day cleaning
- Digitally controlled thermostat for precise and consistent settings
- 104° - 158° F (40° to 70° C) temperature range
- Drop-in models can also be used as freestanding countertop units
- 6 ft. (1.8 m) 120v cord and plug
- **Note: these items must ship by truck**

CLEARANCE REQUIREMENTS

- Drop-in cabinets require a minimum of 6" (15.2 cm) of non-combustible countertop to support the unit and a minimum of 6" (15.2 cm) clearance on all sides of the drop-in for proper air circulation.
- Countertop cabinets require a minimum of 6" (15.2 cm) between the equipment and any surrounding walls. Surrounding walls must be made of non-combustible materials.

Approvals	Date

Outperform every day.™
www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

HEATED DISPLAY CABINETS

Drop-in Models

40845	HDE7136 36" Drop-in
40846	HDE7148 48" Drop-in
40847	HDE7160 60" Drop-in

Curved Models

40855	HDE8136 36" Curved
40883	HDE8336 36" Curved w/ Front Access
40856	HDE8148 48" Curved
40884	HDE8348 48" Curved w/ Front Access
40857	HDE8160 60" Curved
40885	HDE8360 60" Curved w/ Front Access

Cubed Models

40865	HDE8236 36" Cubed
40890	HDE8436 36" Cubed w/ Front Access
40866	HDE8248 48" Cubed
40891	HDE8448 48" Cubed w/ Front Access
40867	HDE8260 60" Cubed
40892	HDE8460 60" Cubed w/ Front Access

DIMENSIONS (Shown in inches (cm))

Drop-in Display Cabinets

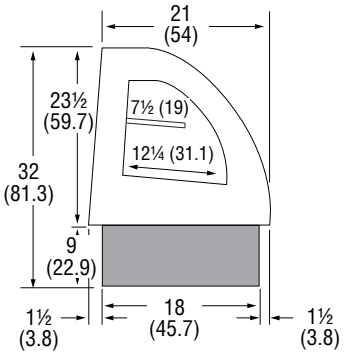

Side View



Front View

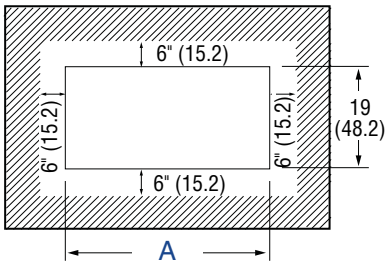

Cutout

Curved Display Cabinets



Top View



Side View

Cubed Display Cabinets



Top View



Side View

Receptacle

120V

NEMA 5-15R

SPECIFICATIONS

Item	(A) Cutout Width	(B) Width	Watts	Volts	Amps	Weight lb (kg)	NEMA Plug
40845	34 (86.3)	36 (91.4)	670	120	5.6	191 (86.6)	5-15P
40846	45 (114.3)	48 (121.9)	710	120	5.9	232 (105.2)	5-15P
40847	58 (147.3)	60 (152)	750	120	6.3	269 (122)	5-15P
40855	–	35 7/16 (90)	670	120	5.6	183 (83)	5-15P
40883	–	35 7/16 (90)	670	120	5.6	183 (83)	5-15P
40856	–	47 3/16 (119.9)	710	120	5.9	221 (100.2)	5-15P
40884	–	47 3/16 (119.9)	710	120	5.9	221 (100.2)	5-15P
40857	–	59 (149.9)	750	120	6.3	263 (119.2)	5-15P

Item	(B) Width	Watts	Volts	Amps	Weight lb (kg)	NEMA Plug
40885	59 (149.9)	750	120	6.3	263 (119.2)	5-15P
40865	35 7/16 (90)	730	120	6.1	220 (99.8)	5-15P
40890	35 7/16 (90)	730	120	6.1	220 (99.8)	5-15P
40866	47 3/16 (119.9)	790	120	6.6	270 (122.5)	5-15P
40891	47 3/16 (119.9)	790	120	6.6	270 (122.5)	5-15P
40867	59 (149.9)	850	120	7.1	316 (143.3)	5-15P
40892	59 (149.9)	850	120	7.1	316 (143.3)	5-15P

VOLLRATH®
Outperform every day.™

www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

© 2013 The Vollrath Company L.L.C.

Form Number L35816 5/16/13
Printed in USA