



**SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR**  
2-, 4- AND 6-DOOR



PTS36 shown



JOB	
AREA	
ITEM NO.	
MODEL NO.	
PTS36	2-Door Model
PTS60	4-Door Model
PTS84	6-Door Model


NSF/ANSI Standard 7 Listed for open food storage.  
Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.

MODEL NUMBERS		PTS36	PTS60	PTS84
<b>NUMBER OF DOORS</b>		2	4	6
<b>EXTERIOR CABINET DIMENSIONS</b>	Length - in. (mm)	36 (914)	60 (1524)	84 (2134)
	Depth - in. (mm)	26 <sup>1</sup> / <sub>16</sub> (678)	26 <sup>1</sup> / <sub>16</sub> (678)	26 <sup>1</sup> / <sub>16</sub> (678)
	Height - in. (mm)	34 <sup>9</sup> / <sub>16</sub> (878)	34 <sup>9</sup> / <sub>16</sub> (878)	34 <sup>9</sup> / <sub>16</sub> (878)
<b>INTERIOR CABINET DIMENSIONS</b>	Length - in. (mm)	20 (508)	44 (1118)	68 (1727)
	Depth - in. (mm)	18 <sup>3</sup> / <sub>4</sub> (476)	18 <sup>3</sup> / <sub>4</sub> (476)	18 <sup>3</sup> / <sub>4</sub> (476)
	Height - in. (mm)	31 (787)	31 (787)	31 (787)
<b>INTERNAL VOLUME Net. Cu. Ft. (Litres)</b>		8.0 (227)	17.4 (493)	26.7 (756)
<b>PRODUCT CAPACITY</b>	CASE PACKED - 12 OZ. BOTTLE/CAN	182/273	371/553	581/868
	STAGGERED - 12 OZ. BOTTLE/CAN	196/292	400/592	628/932
<b>SHIPPING WEIGHT Lbs. (kg.)</b>		264 (120)	354 (161)	496 (225)
<b>ELECTRICAL SPECIFICATIONS</b>	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	3.2	5.5	6.3
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	8'	8'	8'
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control
Lighting Type	LED	LED	LED	
<b>REFRIGERATION SPECIFICATIONS</b>	Horsepower	1/5	1/4	1/3
	Refrigerant	R134a	R134a	R134a
	Refrigerant Charge oz.	6.5	7.0	7.0
	Factory Temperature Setting-Refrigerator F (C)	38° (3.3°)	38° (3.3°)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting-White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting-Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range-Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube
Pull Out Condensing Unit	Yes	Yes	Yes	
Front Vented	Yes	Yes	Yes	
<b>PLUMBING</b>	Floor Drain Included	Yes	Yes	Yes
	Evaporator Condensate	Automatically	Automatically	Automatically

Form No. Z2381  
Rev. 08.30.2018

**Perlick®** SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR  
2-, 4- AND 6-DOOR

Note: Open floor drain not provided on models intended for non-packaged food.

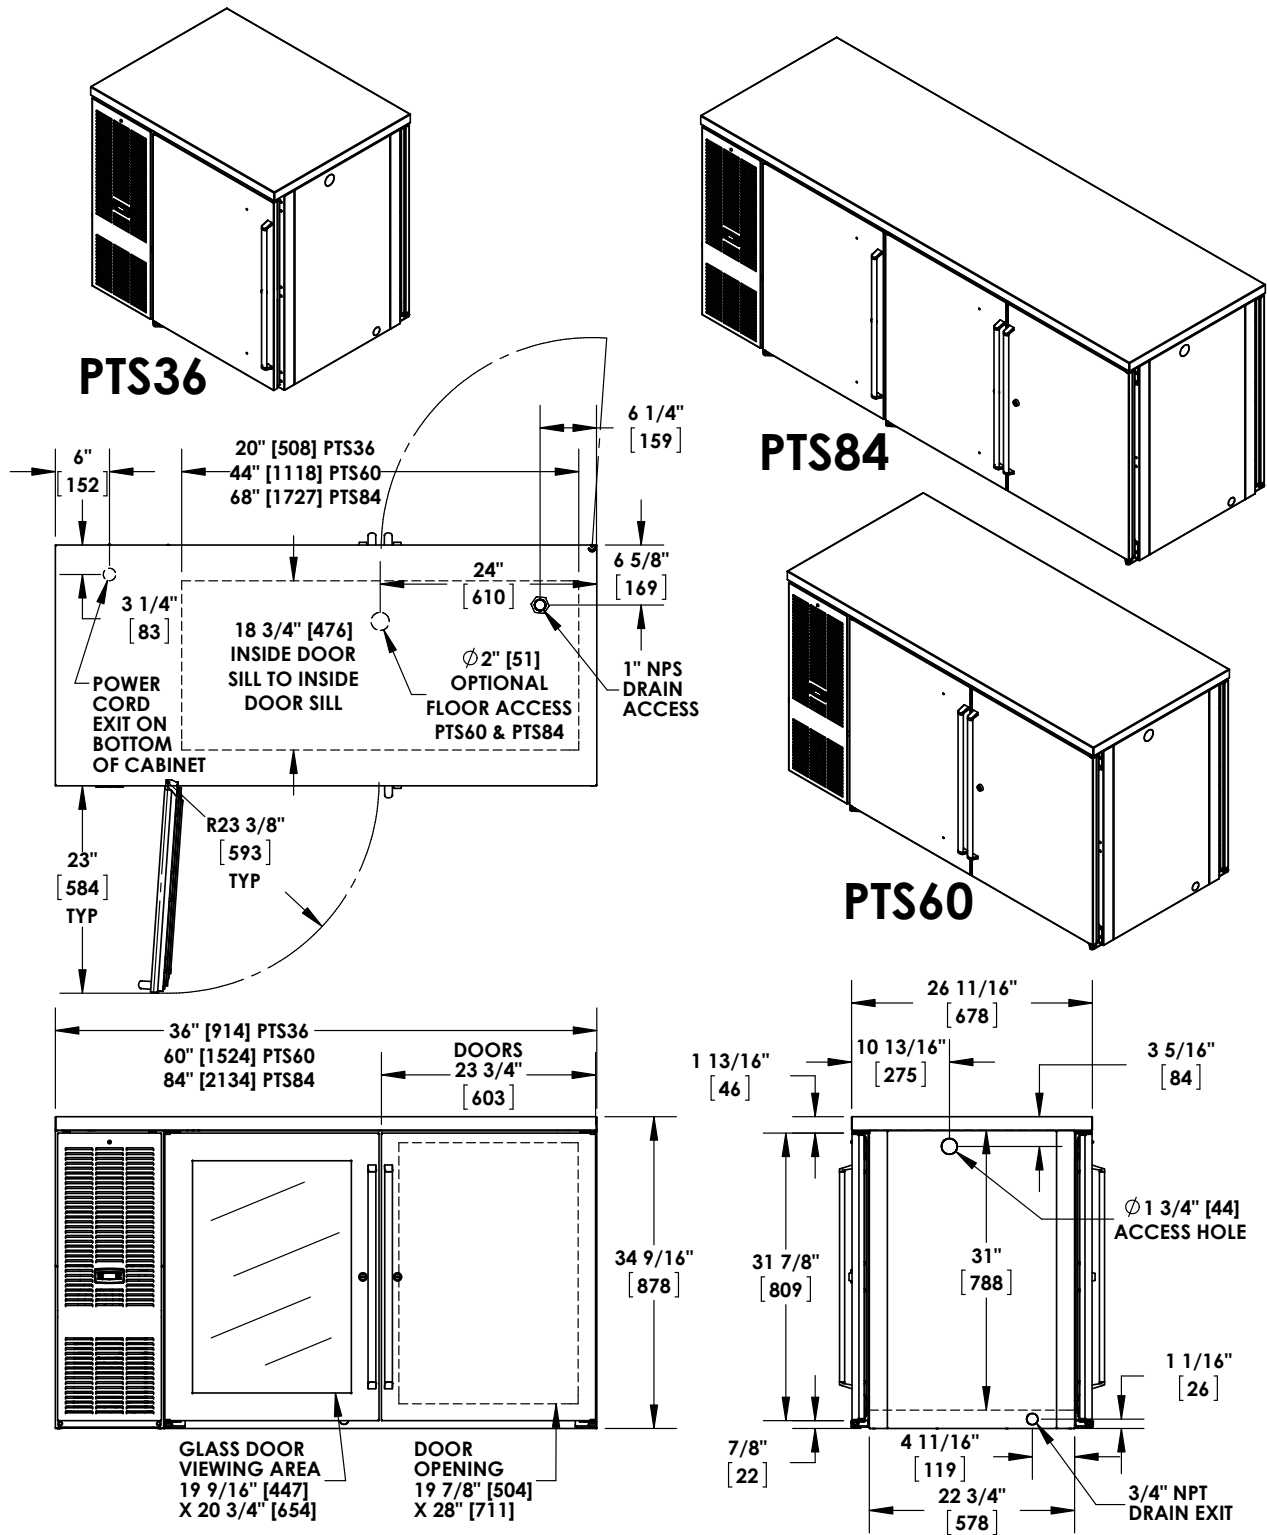

**California Prop 65 Notice:**

**!** **WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm, For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Form No. Z2381  
Rev. 08.30.2018