

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234 Email: geninfo@federaling

Email: geninfo@federalind.com Website: www.federalind.com

Project Name:		AIA#
Item #:		
Model #:	Qty:	SIS#
Approval:		

MARKET SERIES SELF-SERVE REFRIGERATED DELI CASE

Market Deli. The low profile merchandiser that provides solutions to your fresh food merchandising needs. Designed for continuous case line-ups.



MODEL	DIMENSIONS (Includes End Panels)
□ SQ3CDSS	36 x 44.125 x 32.25 (in)
	914 x 1121 x 819 (mm)
□ SQ4CDSS	48 x 44.125 x 32.25 (in)
	1219 x 1121 x 819 (mm)
□ SQ5CDSS	60 x 44.125 x 32.25 (in)
	1524 x 1121 x 819 (mm)
□ SQ6CDSS	72 x 44.125 x 32.25 (in)
	1829 x 1121 x 819 (mm)
□ SQ8CDSS	96 x 44.125 x 32.25 (in)
	2438 x 1121 x 819 (mm)

STANDARD FEATURES

Model Features

- Four-point leveling system.
- Rear work counter.
- Pedestal or panel base design.
- Stainless steel interior and exterior finish.
- Solid-state control panel with main power, light, and temperature readout.
- Designed for continuous case line-ups.
- Appliance receptacle provided on back for case register, scale or slicer.
- Energy-saving night curtain

Lighting

- 3500K LED Case Light
- DLC Certified, IP66 rated

Refrigeration

- Average case temperature of 38° to 40°F is maintained.
- Coated evaporator coil.
- Thermometer
- R513a Refrigeration (R449a in Remote Applications)

Agency Approvals

- UL Safety and UL Sanitation listed
- DOE 2017 Compliant.

OPTIONAL ACCESSORIES

- □ Special Case Height (34" or 36")
- □ Front Bumper Rail (Black, White, Green, Gray)
- □ Display Riser or Step Pan Holder
- □ Remote Refrigeration (R449a Refrigerant, EEV Included)
- □ Decorative End Panel (Black, White, Green, Gray)
- $\hfill\Box$ Scale Stand
- ☐ Food Container Holder

- □ Accent Base Light
- $\hfill\Box$ Slicer Stand
- □ Fish Case Package (Includes Ice Pan and Drain)
- ☐ Condensate Evaporator Assembly







AIA#


MARKET SERIES SELF-SERVE REFRIGERATED DELI CASE

SIS#

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C			
All	Packaged Refrigerated Products	38°F / (3.3°C)			

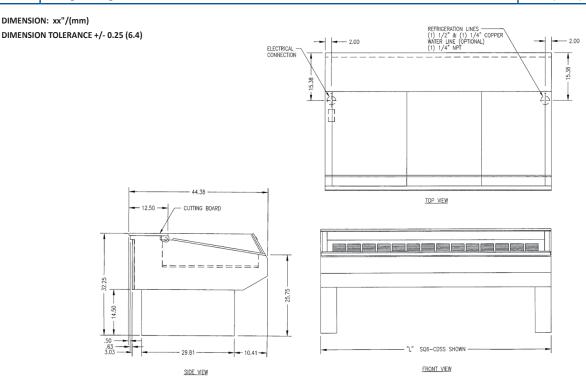

MODEL	* DIMENSIONS			SHIPPING WHT		CAPACITY	**SELF CONTAINED	** REMOTE						
MODEL	L	D	Н1	UNITS	LBS	KILO	DISPLAY RISER	120/60/1	120/60/1					
SQ3CDSS	36	44.125	32.25	in.	675 306	200	3	1/2 HP - 11.5 AMPS	6 AMPS					
3Q3CD33	1226	1121	819	mm.		300								
SQ4CDSS	48	44.125	32.25	in.	795	361	4	4	1/2 HP - 13.8 AMPS	7 AMPS				
3Q4CD33	1219	1121	819	mm.	795	301		1/2 HF - 13.0 AIVIF3	7 AIVIF3					
SQ5CDSS	60	44.125	32.25	in.	895	406	4	1/2 HP - 13.8 AMPS	7 AMPS					
3Q3CD33	1524	1121	819	mm.	893	400								
SQ6CDSS	72	44.125	32.25	in.	1035 470	1035		1025 470	470	7	1/2 HP - 14.8 AMPS	7 AMPS		
3Q0CD33	1829	1121	819	mm.	1055	470	/	1/2 HP - 14.8 AWPS	/ AIVIPS					
SQ8CDSS	96	44.125	32.25	in.	1125 515	1135	1125	1125 515	1105 515	1135 515	1125	9	3/4 HP - 16.0 AMPS	8 AMPS
3406033	2438	1121	819	mm.	1133	5 515	9	3/4 FT - 10.0 AIVIPS	o AIVIPS					

- * Without decorative end panels
- ** Plus general receptacle 120V, 15 AMP. (2nd circuit required.)
- When ordering, specify case line-up and pedestal or panel design
- If a GFCI circuit is required, a GFCI Breaker MUST be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









Phone: 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com