




Your Solutions Partner

# Specifications

F.O.B Sedalia, Missouri 65301

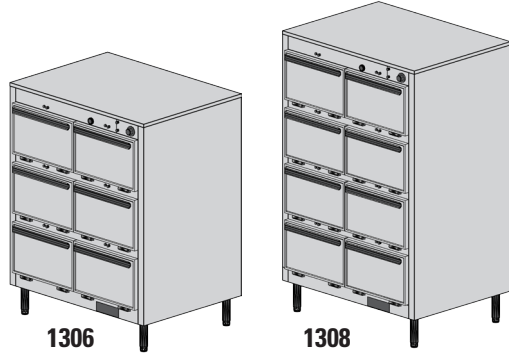

1306

1308

### OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes 2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pair 3" angle slides
- Door locks
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph; 208V/3Ph; 240V/1 PH; 240/3PH

### AGENCY LISTING:



**DUKE MANUFACTURING CO.**  
 2305 N. Broadway  
 St. Louis, MO 63102

**800.735.3853 Toll Free**  
**314.231.5074 Fax**  
**www.dukemfg.com**

SS-DM-00183-THM-10

### Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

MODEL:

### Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2" D Compartments

- 1306** Reach-In 1 thermostat for all 6 compartments , w/ legs
- 1306P** Pass-Thru 1 thermostat for all 6 compartments, w/ legs
- 1308** Reach-In 1 thermostat for all 8 compartments , w/ legs
- 1308P** Pass-Thru 1 thermostat for all 8 compartments, w/ legs

### BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

### DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed Interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in-stop externally adjustable, completely concealed

### COMPARTMENT:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 3" angled slide pairs
- Removable compartment for inspection and maintenance

### ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100° - 300° and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panel

### DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

### INSULATION:

- Body fully insulated with 1-1/2" fiberglass

### HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements.

### LEGS:

- Stainless steel die-stamped adjustable - 6" high

### SHORT FORM SPECIFICATIONS:


**Duke Thermotainers Food Holding Cabinets.** Models 1306/1306P constructed with six (6) compartments. Models 1308/1308P to have eight (8) compartments. Compartment 14"W x 9"H x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat controls all compartments. Built-in installation - allow 1/4" tolerance greater than body width 100°-300°F heat range in dial thermometer, and 6" high stainless steel legs.



**THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES  
9" H x 14" W x 23-1/2" D COMPARTMENTS**

- 1306** Reach-In 1 thermostat for all 6 compartments, w/ legs
- 1306P** Pass-Thru 1 thermostat for all 6 compartments, w/ legs
- 1308** Reach-In 1 thermostat for all 8 compartments, w/ legs
- 1308P** Pass-Thru 1 thermostat for all 8 compartments, w/ legs

| LEGEND |                       |
|--------|-----------------------|
| ▲      | ELECTRICAL CONNECTION |

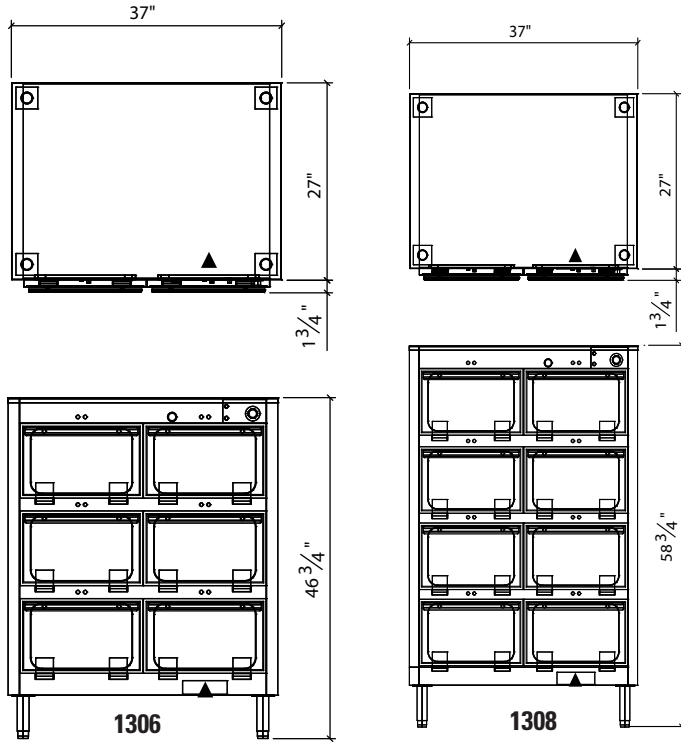

**DIMENSIONS:**

Freight Class: 100

| Model        | Width |      | Depth  |      | Height |       | Comp. Depth |      | Cube ft. crated | Weight |       |
|--------------|-------|------|--------|------|--------|-------|-------------|------|-----------------|--------|-------|
|              | in    | cm   | in     | cm   | in     | cm    | in          | cm   |                 | lbs    | kg    |
| <b>1306</b>  | 37    | 94.0 | 28-3/4 | 73.0 | 46-3/4 | 118.8 | 23-1/2      | 59.7 | 44.6            | 550    | 250.0 |
| <b>1306P</b> | 37    | 94.0 | 30-1/2 | 77.5 | 46-3/4 | 118.8 | 25-1/2      | 64.8 | 47.0            | 550    | 250.0 |
| <b>1308</b>  | 37    | 94.0 | 28-3/4 | 73.0 | 58-3/4 | 149.2 | 23-1/2      | 59.7 | 54.4            | 650    | 295.5 |
| <b>1308P</b> | 37    | 94.0 | 30-1/2 | 77.5 | 58-3/4 | 149.2 | 25-1/2      | 64.8 | 57.3            | 650    | 295.5 |

**ELECTRICAL SPECIFICATIONS:** (Consult factory for 3-phase electrical requirements and other options.)

| Model        | Connected Load |
|--------------|----------------|
| <b>1306</b>  | 2500 watts     |
| <b>1306P</b> | 2500 watts     |
| <b>1308</b>  | 3000 watts     |
| <b>1308P</b> | 3000 watts     |

|                                   | <b>1306/1306P</b>   | <b>1308/1308P</b>   |
|-----------------------------------|---|---|
| <b>Capacity w/standard slides</b> | (18) 12" x 20" x 2" pans or<br>(12) 12" x 20" x 4" pans or<br>(6) 12" x 20" x 8" pans | (24) 12" x 20" x 2" pans or<br>(16) 12" x 20" x 4" pans or<br>(8) 12" x 20" x 8" pans |

- 1306** Reach In - hinged doors on front only
- 1306P** Pass Thru - hinged doors on front & back for pass-thru service
- 1308** Reach In - hinged doors on front only
- 1308P** Pass Thru - hinged doors on front & back for pass-thru service



**DUKE MANUFACTURING CO.**

2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
314.231.1130 In Missouri  
314.231.5074 Fax  
www.dukemfg.com

Specification subject to change