

"Your Solutions Partner"

# **Specifications**

F.O.B Sedalia, Missouri 65301



#### **OPTIONS:**

- 10" deep pan liner
- ☐ Sliding doors A328-xPG/xSS
- Door locks
- □ 220v 50Hz compressor
- ☐ Condensate evaporator COND-EVAP
- ☐ Serving shelves w/glass protector panels A956-460 x
- ☐ Glass display shelves A98x
- ☐ Self Service Canopies T\$530-xx, T\$530-xx-1\$N
- ☐ Buffet shelves A83x/A93x
- Adapter bars A513, A516
- Adapter panels A, B, C, D, E, F, G, H
- ☐ Stainless steel carving boards A442-x-S/A445-xS
- Wood carving boards A442-xW/A445-xW
- ☐ Solid tray slides SOLID FX/HD
- □ 3 bar tray slides
- Kick plates
- □ 5" casters, 2 swivel w/locks AACA-SW
- ☐ Stainless steel dish shelf A441-xS
- ☐ Drop brackets on tray slide AHD-BRKT-3BTS
- ☐ False bottom perforated, stainless ACMOD-5, -6, -7
- ☐ Veneered plastic laminate panels on body
- Special powder coat painted body
- ☐ Body latches 14695

## AGENCY LISTINGS:



DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314-231-1130 In Missouri 314.231.5074 Fax www.dukemfg.com

App	proval Stamp(s):								
PR(	DDUCT INFORMATION DJECT: M: ANTITY:			- - -					
Ae	DEL: roServ Serving Sys d Pan Units - Mechanic		leet:	s NSF Standard 7					
0	315-25-N7 316-25-N7 327-25-N7	60" length	46" length unit/ 42-1/2" length pan 60" length unit/56-1/2" length pan 74" length unit/70-1/2" length pan						
TOF	<b>2</b> : ■ 20 gauge, 300 Ser	ries stainless ste	el						
LIN	ER:  18 gauge, 300 Ser Insulated on all fou 1" cast brass drain Condensing unit, r plug - NEMA 5-15,	ries stainless ste ur sides and bott and plug efrigerant coil, c R134A Refriger	el - 8 om ontro ant	" deep, 21-3/4" wide  Is, electric cord and  movable stainless brackets					
BOD	Y:								
		Paint grip or stainless steel Choice of (12) powder coat paint colors (must choose one)							
	#217105 - Designe #217150 - Orange #217107 - Hollyber #217127 - Fence G #217102 - Silver Ha #217101 - Semi-Gl	ry Red Green ammer		#217154 - Racing Red #217120 - Sky Blue #217152 - Stone Gray #217113 - Brown Kickplate					
i	Flanged or channeled ed Welded together with local Compressor compartment	al reinforcement		vered arille					

- Compressor compartment with removable louvered grille
- Mounted on 6" stainless steel legs with adjustable feet

## SHORT FORM SPECIFICATIONS:


Duke AeroServ Serving Systems - Cold Pan Units - Mechanically Cooled - Meets NSF Standard 7. Top shall be constructed of 20 gauge, 300 Series stainless steel, flanged down into heavy gauge, 300 Series stainless steel pan, 8" deep. Liner shall hold food pans, 3" below top, be insulated on all four sides and bottom and equipped with 1" cast brass drain and plug. Equipped with refrigerant coil, condensing unit, controls and electric cord and plug. Compressor compartment covered by removable louvered grille. Body and shelves shall be formed of paint-grip steel with powder coat paint or stainless steel with integrally flanged or channeled edges for rigidity and structural strength. Each body individually welded together with local reinforcements as required. 6" polished stainless steel legs to be furnished. Must add "PG" to model number for Paint Grip Bodies, "SS" for Stainless steel bodies.



## **AEROSERV SERVING SYSTEMS** Cold Pan Units - Mechanically Cooled Meets NSF Standard 7

□ 315-25-N7 46" length unit / 42-1/2" length pan

□ 316-25-N7 60" length unit / 56-1/2" length pan 74" length unit / 70-1/2" length pan □ 327-25-N7




46", 60", 74"


22"

**LEGEND** 

- ELECTRIC CONNECTION POINT SINGLE PHASE

- DRAIN LOCATION

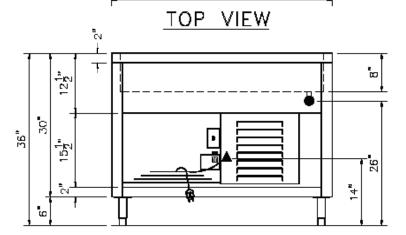



## **DIMENSIONS:**

FREIGHT CLASS: 150

	Depth		Width		Height		Cube	Weight		Cold Pan Length	
Model	in	cm	in.	cm	in.	cm	ft. crated	lbs	kg	in.	cm
315-25-N7	46	116.8	24-1/2	62.2	36	91.4	37.7	310	141.0	42-1/2	108.0
316-25-N7	60	152.4	24-1/2	62.2	36	91.4	47.9	386	175.5	56-1/2	143.5
327-25-N7	74	188.0	24-1/2	62.2	36	91.4	58.1	477	216.8	70-1/2	179.1

## **ELECTRICAL SPECIFICATIONS**

120 Volt HP Model **Amps NEMA** 315-25-N7 3.9 5-15 1/4 4.8 5-15 316-25-N7 1/4 327-25-N7 4.8 5-15 1/3



"Your Solutions Partner"

314.231.5074 Fax

800.735.3853 Toll Free www.dukemfg.com

2305 N. Broadway

St. Louis, MO 63102

**DUKE MANUFACTURING CO.** 

10/08 Printed in U.S.A © 2008, Duke Manufacturing Co.

Specification subject to change