



Specifications

F.O.B Sedalia, Missouri 65301



ADI-3E

OPTIONS:

- 3 phase wiring (except ADI-1E)
- 1,000 watt element (not available on 120V 5- and 6-well units)
- Designer Foodshields
- Stainless spillage pans
- Telescope covers
- Removable S/S carving station
- Adapter Plates
- Adapter Bars

AGENCY LISTING:



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

Drop-Ins

Hot Food - Electric - Exposed Element Wells

- ADI-1E 18 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-2E 32 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-3E 46 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-4E 60 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-5E 74 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-6E 88 1/4" L X 24 1/4" W X 12 3/4" H

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/locking tabs
- Vinyl foam gasket as sealant
- Die-stamped openings - 12-1/16" x 20-1/16"

HEAT COMPARTMENTS:

- Exposed element in each compartment
 - 500 watt, 120 Volt/1 Ph
 - 750 watt, 208 Volt/1 Ph
 - 750 watt, 240 Volt/1 Ph
- 8" deep stainless steel liner, dry operation
- Insulated bottom
- Includes #576 aluminum spillage pans for use with water

CONTROL PANEL:




- Stainless steel face plate, plastic knobs
- UL approved
- Infinite switch controls in remote box
- 2 panels of units with 4, 5 or 6 wells

EXTERIOR HOUSING:

- Heavy gauge paint grip steel

SHORT FORM SPECIFICATIONS:

Duke Slide-In - Slimline - Hot Food - Electric. Top flange of heavy gauge 300 series s/s with overhang on 4 sides, 12-1/16" x 20-1/16" die-stamped hot food openings, 8" deep s/s liner, fully insulated, with remote control panel, s/s top and interior liner, heavy gauge paint grip steel exterior housing, exposed elements, infinite switch controls, includes 576 spillage pans.

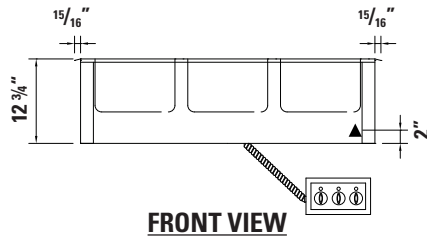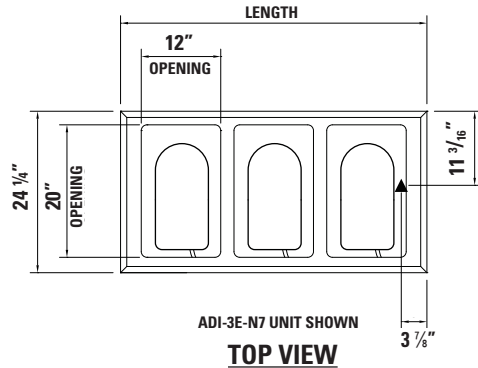

**DROP-INS
HOT FOOD - ELECTRIC**

- ADI-1E 18 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-2E 32 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-3E 46 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-4E 60 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-5E 74 1/4" L X 24 1/4" W X 12 3/4" H
- ADI-6E 88 1/4" L X 24 1/4" W X 12 3/4" H

LEGEND	
▲	- ELECTRICAL CONNECTION
Allow 4" gap between controls and unit	

FREIGHT CLASS: 100

Model	Length		Width		Height		Top Openings	Cutout Length		Cutout Width		Control Panels	Cube ft. Crated	Weight	
	in.	cm	in.	cm	in.	cm		in.	cm	in.	cm			lbs.	kg.
ADI-1E	18 1/4	45.7	24 1/4	61.6	12 3/4	32.4	1	17	43.2	23	58.4	1	8.2	43	19.6
ADI-2E	32 1/4	81.3	24 1/4	61.6	12 3/4	32.4	2	31	78.7	23	58.4	1	13.0	75	34.1
ADI-3E	46 1/4	116.8	24 1/4	61.6	12 3/4	32.4	3	45	114.3	23	58.4	1	17.7	90	40.9
ADI-4E	60 1/4	152.4	24 1/4	61.6	12 3/4	32.4	4	59	149.9	23	58.4	2	22.5	115	52.3
ADI-5E	74 1/4	188.0	24 1/4	61.6	12 3/4	32.4	5	73	185.4	23	58.4	2	27.2	140	63.6
ADI-6E	88 1/4	223.5	24 1/4	61.6	12 3/4	32.4	6	87	221.0	23	58.4	2	32.0	220	100.0

REMOTE CONTROL CUTOUT IS 9" X 4-3/8"

Model	120 Volt/500 Watt		208 Volt/750 Watt		240 Volt/750 Watt	
	watts	amps	watts	amps	watts	amps
ADI-1E	500	4.2	750	3.6	750	3.1
ADI-2E	1000	8.3	1500	7.2	1500	6.3
ADI-3E	1500	12.5	2250	10.8	2250	9.4
ADI-4E	2000	16.7	3000	14.4	3000	12.5
ADI-5E	2500	20.8	3750	18.0	3750	15.6
ADI-6E	n/a	n/a	4500	21.6	4500	18.8

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102



800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change