


## TWIN TWIST, FLOOR MODEL PRESSURIZED SOFT SERVE FREEZER



- High capacity, hard-working, space-saving floor unit guarantees years of dependable service
- Special calibrated electronic thermistor assures optimum product quality and quick response during peak draw periods
- Standard night switches provide refrigerated overnight mix storage, saving both labor and energy
- Self-sharpening, nonmetallic auger flights for reliable service
- Optional remote mix pump permits use of large capacity mix containers, keeping mix handling to a minimum
- Perfect for high volume operations such as fast food locations, drive-ins, theme parks, institutions, and recreational facilities
- Remote air-cooled condenser optional



Since 1905

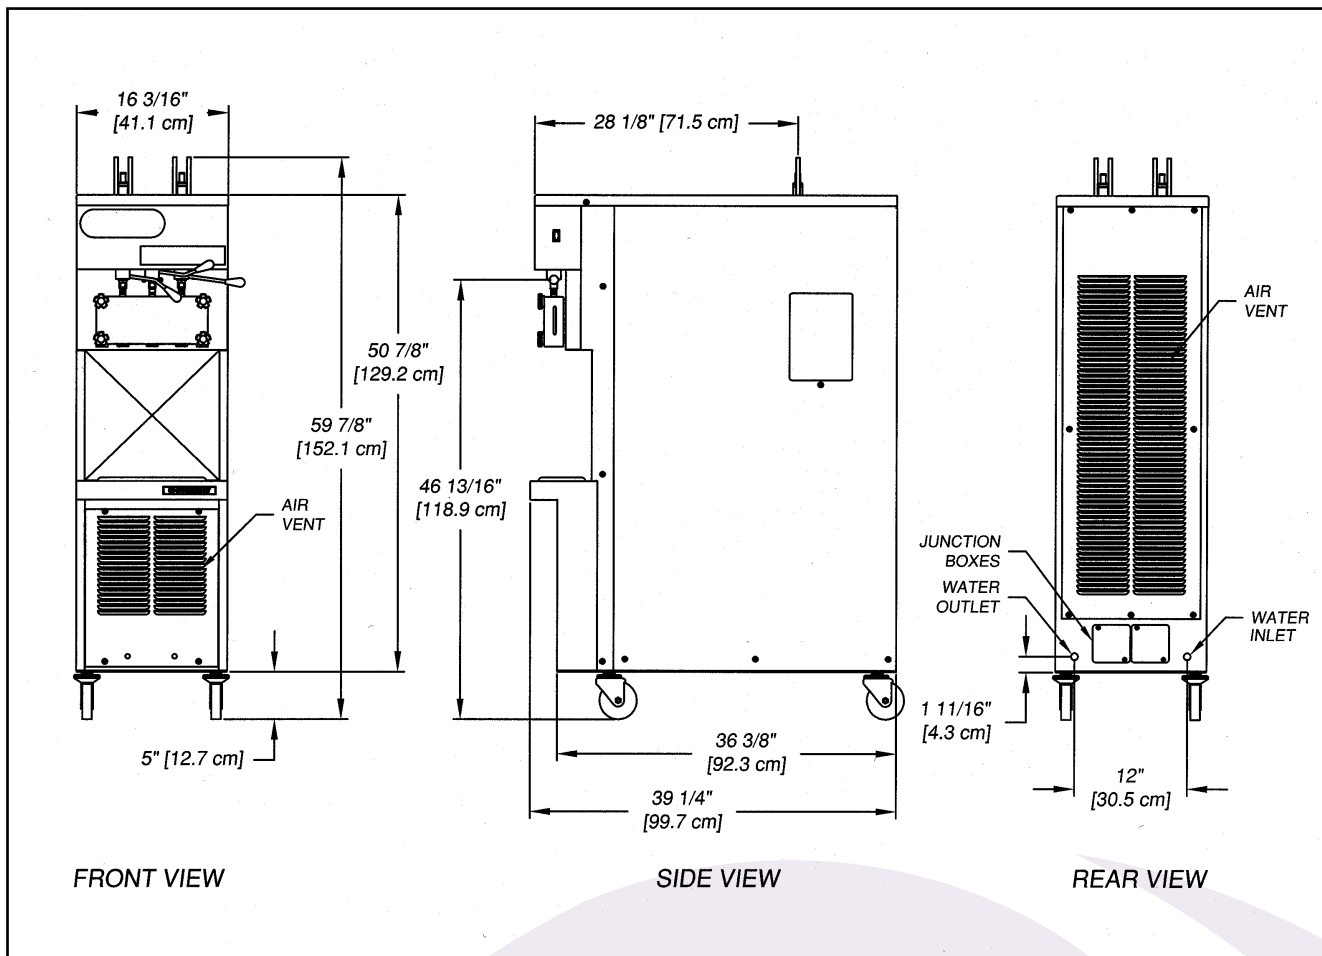

SPECIFICATIONS	MODEL 238R	
<b>DIMENSIONS</b>	<b>FREEZER</b>	<b>WITH CRATE</b>
Depth	39 1/4" (99.7 cm)	51" (129.5 cm)
Width	16 3/16" (41.1 cm)	25" (63.5 cm)
Height	59 7/8" (152.1 cm)	67" (170 cm)
<b>WEIGHT</b>	<b>FREEZER</b>	<b>WITH CRATE</b>
	710 lbs. (322.1 kg)	820 lbs. (372 kg)
<b>ELECTRICAL</b>	1 phase, 208/230 volt, approximately 10 total running amps per barrel, 35 amp maximum fuse or HACR circuit breaker per barrel, or 40 amp maximum regular circuit breaker	3 phase, 208/230 volt, approximately 8 total running amps per barrel, 25 amp maximum fuse or HACR type circuit breaker or 30 amp circuit breaker size.
<b>REFRIGERANT</b>	R404	
<b>COMPRESSOR</b>	(2) 14,000 BTU/hr.	
<b>DRIVE MOTOR</b>	Two motors, 2 H.P. each	
<b>COOLING</b>	Water Cooled; Air Cooled; Remote Available	
<b>PLUMBING FITTINGS</b>	Requires 1/2" N.P.T. water and drain fittings.	
<b>FREEZING CYLINDER VOLUME</b>	(Two) 1.13 gallon (4.5 qt; 4.3 litre) each	
<b>OPTIONS/ACCESSORIES</b>	Model 219 or U3-02 Remote Mix Pump, cup dispensers, shake spinner, wash/drain kit, pump cleaner tray, air cooled remote condenser.	
<b>WARRANTY</b>	One-year parts and labor warranty; five year warranty on compressor, evaporator/hopper assembly, drive motor, speed reducers, auger shaft, and auger flights (against breakage).	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600  
 920-894-2293 • 800-558-5807  
 Fax: 920-894-7029  
 E-mail: commercial@stoelting.com  
 Internet: www.stoelting.com

**Certified, Listed and/or Recognized by:**

