


# TWIN TWIST, FLOOR MODEL PRESSURIZED SOFT SERVE FREEZER

U431-I2



- Adjustable dispensing rate meets the requirements of high volume operations.
- Refrigerated mix storage cabinet holds two 8-gallon mix containers for use with or without a bag connection system.
- Mix pumps inject the exact amount of air into your mix, maintaining overrun to ensure maximum profitability.
- Powerful IntelliTec 2™ control communicates with the operator through a multiline graphics LCD display using full text instructions.
  - ✓ Provides additional operator information.
  - ✓ Enhanced service diagnostic capability.
- Energy Conservation Mode (ECM) protects product from over-agitation during slow or non-draw periods.
- Bottom sealing spigots eliminate waste and offer precise dispensing control.
- Mix-low system to alert you of low mix conditions.
- Self-sharpening, nonmetallic auger flights for reliable service.



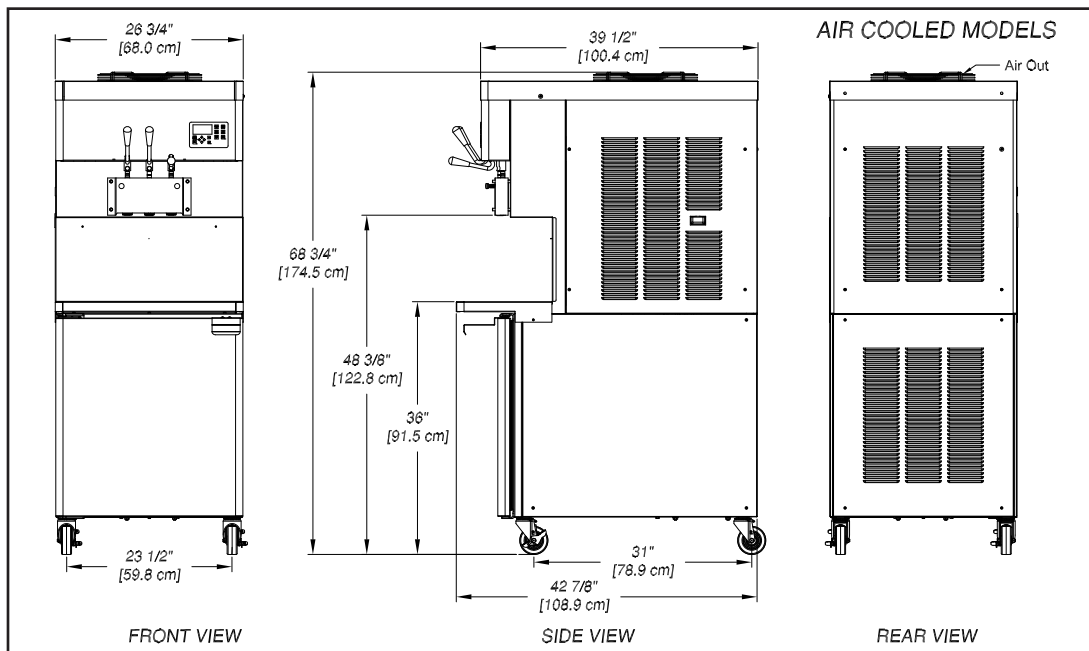

	<b>U431-I2 Water Cooled</b>				<b>U431-I2 Air Cooled</b>			
<b>Dimensions</b>	<b>Machine</b>		<b>with crate</b>		<b>Machine</b>		<b>with crate</b>	
width	26-3/4" (67,9 cm)		34" (86,4 cm)		26-3/4" (67,9 cm)		34" (86,4 cm)	
height	67-1/2" (171,5 cm)		78" (198,1 cm)		68-3/4" (174,6 cm)		78" (198,1 cm)	
depth	39-1/2" (100,3 cm)		48" (121,9 cm)		39-1/2" (100,3 cm)		48" (121,9 cm)	
<b>Weight</b>	760 lbs (344,7 kg)		908 lbs (411,8 kg)		785 lbs (356,0 kg)		935 lbs (424,1 kg)	
<b>Electrical</b>	<b>1 PH</b>		<b>3 PH</b>		<b>1 PH</b>		<b>3 PH</b>	
	<b>left</b>	<b>right</b>	<b>left</b>	<b>right</b>	<b>left</b>	<b>right</b>	<b>left</b>	<b>right</b>
minimum circuit ampacity	32A	32A	20A	20A	32A	32A	20A	20A
maximum overcurrent protection device	50A	50A	30A	30A	50A	50A	30A	30A
<b>International Option</b>	1 Phase, 220-240 VAC, 50Hz or 3 Phase, 380-415 VAC, 50Hz							
<b>Compressor</b>	Two - 19,000 Btu/hr Cabinet - 1,300 Btu/hr Compressor (R-134a)							
<b>Drive Motor</b>	Two - 2 hp							
<b>Cooling</b>	Water cooled units require 1/2" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F. The machine requires 6" (15,2 cm) air space on all sides for the cabinet refrigeration system.				Air cooled units require 6" (15,2 cm) air space on all sides and open at the top.			
<b>Hopper Volume</b>	Two - 8 gallon (30,28 liters)							
<b>Freezing Cylinder Volume</b>	Two - 1.33 gallon (5,3 liters)							

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

Distributed by:



FOODSERVICE EQUIPMENT  
 502 Highway 67 • Kiel, WI 53042-1600  
 920-894-2293 • 800-558-5807  
 Fax: 920-894-7029  
 E-mail: foodservice@stoelting.com  
 www.stoeltingfoodservice.com

ISO 9001:2008 Registered

Certified, Listed and/or Recognized by:



STMF-118 3/11