


HIGH CAPACITY COMBINATION SOFT SERVE/SHAKE FREEZER



- Allows the operators to dispense outstanding soft serve from the left side, and thick creamy shakes from the right side, with the convenience and cost of one unit.
- Ultra high capacity with (2) 18,000 B.T.U.H. compressors and (two) 2 H.P. drive motors provides continuous production from each cylinder.
- Refrigerated mix storage cabinet holds (2) 8 gallon mix containers per cylinder, to produce up to 340 four-ounce cones, plus 170 eight-ounce shakes without refilling.
- Air/mix pumps inject the exact amount of air into your mix, maintaining consistent overrun to assure maximum profitability, with clean-in-place simplicity.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Long-wearing parts offer lower preventative maintenance costs.
- Clear door shows visible moving product for merchandising appeal.
- Standby refrigeration mode provides fresh creamy product at opening time.
- Forced refrigeration switch; constant ready-to-serve mode for high volume dispensing.
- Mix low warning light automatically notifies operator when mix needs to be added.
- The U444 is the ideal choice for restaurants, drive-ins, recreational facilities, ice cream parlors, schools, and cafeterias.
- Optional bag connection system.
- Optional shake mixer.

 **STOELTING**[®]

Since 1905

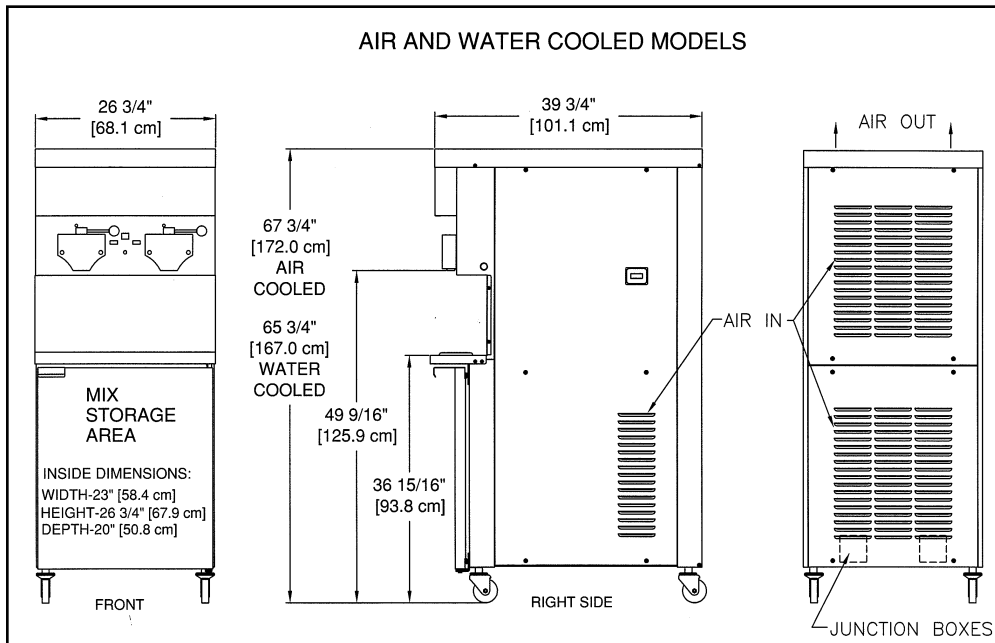

SPECIFICATIONS	MODEL U444 (water-cooled)				MODEL U444 (air-cooled)			
	FREEZER		WITH CRATE		FREEZER		WITH CRATE	
DIMENSIONS								
Depth	39 3/4" (101 cm)		48" (121.9 cm)		39 3/4" (101 cm)		48" (121.9 cm)	
Width	26 3/4" (68 cm)		34" (86.4 cm)		26 3/4" (68 cm)		34" (86.4 cm)	
Height	65 3/4" (167 cm)		78" (198.1 cm)		67 3/4" (172.0 cm)		78" (198.1 cm)	
WEIGHT								
	760 lbs. (344.7 kg)		908 lbs. (411.9 kg)		785 lbs. (356.1 kg)		935 lbs. (424.1 kg)	
ELECTRICAL	ELECTRICAL 208/230 VOLT				ELECTRICAL 208/230 VOLT			
			1 PHASE				3 PHASE	
			Left Side	Right Side	Left Side	Right Side	Left Side	Right Side
			17.6	17.2	11.6	11.2	20.8	17.2
			31	31	21	21	36	31
			45	45	30	30	50	45
			45	45	30	30	50	45
	International: 220-240/380-415 volts/50 hz/3 phase.				International: 220-240/380-415 volts/50 hz/3 phase.			
REFRIGERANT	R404A				R404A			
COMPRESSOR	(2) 18,000 B.T.U.H.				(2) 18,000 B.T.U.H.			
DRIVE MOTOR	(2) 2 H.P.				(2) 2 H.P.			
COOLING	Water cooled				Air cooled			
Air Flow	In sides and back, out top 3" minimum clearance.				In sides and back, out top 3" minimum clearance.			
PLUMBING FITTINGS	Water cooled requires 1/2" N.P.T. water and drain fittings.							
FREEZING CYLINDER SIZE	(Two) 1.33 gallon, 5.3 quart., 5 liters				(Two) 1.33 gallon, 5.3 quart., 5 liters			
OPTIONS	Side mounted spinner kit 2177877; Dual bag connection kit 2177801							
WARRANTY	One-year warranty; five year warranty on compressor, evaporator assembly, drive motor, speed reducers, auger shaft, and auger flights (against breakage).							

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: commercial@stoelting.com
 Internet: www.stoelting.com

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:



05/06