



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

ENCLOSED TRANSPORT CABINETS

Insulated Utility Transport for 18" x 26" Trays

INSULATED AMBIENT "ETC-1826-INS" SERIES

All purpose insulated cabinet for storage and transport



- 1** High density fiber glass insulation throughout retains food quality and temperatures without the use of an external heat source
- 2** ETC-1826-INS series accommodates 18" x 26" or 14" x 18" trays on a fixed one-piece stainless steel rack that is removable for thorough interior cleaning
- 3** Made for transport applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport
- 4** Full perimeter bumper extends beyond doors, handles, etc., preventing damage to facility or cabinet
- 5** Heavy-duty polyurethane casters are long lasting and used for easy maneuverability, even when fully loaded
- 6** Push pull handles provide greater user control and transporting ease
- 7** Keep your food chilled with the popular cold plate cartridge optional accessory
- 8** Heavy-duty die cast hinges support fully insulated door equipped with edge mounted, full grip latch for easy use

**Two year limited warranty*



Fixed Slides



Tubular Welded Base Frame



Built for Transport



Push Pull Handles





made to serve you better

NON-HEATED

PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

SPECIFICATIONS: INSULATED ENCLOSED TRANSPORT CABINETS

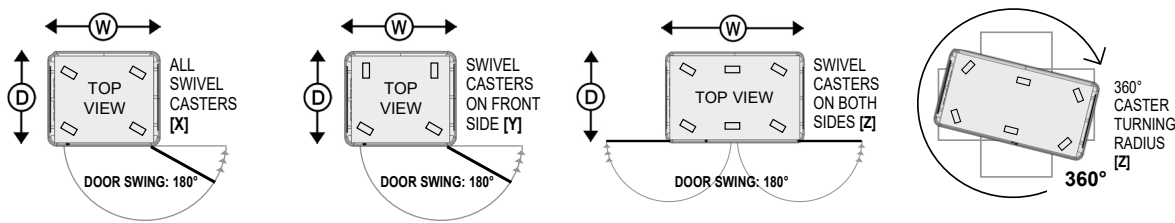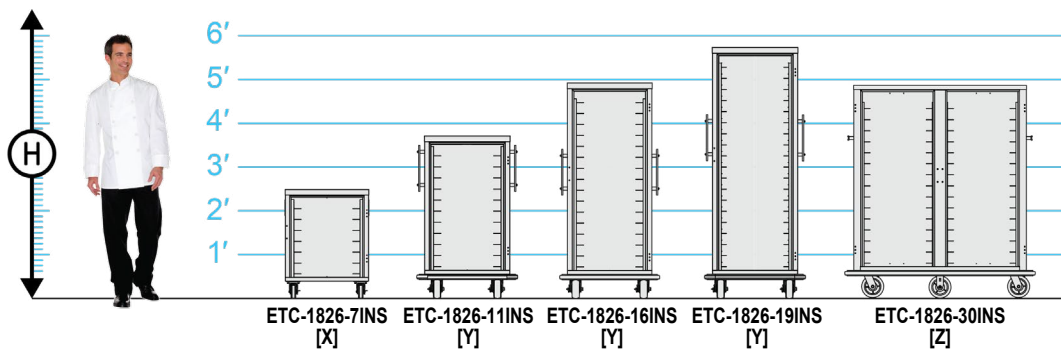

MODEL NUMBER	CAPACITIES OF TRAYS/PANS: 3" Spacings are Standard							CLASS 100					
	STANDARD FIXED RACK:[A] @ 3" Spacings		OPTIONAL ADJUSTABLE SLIDES:[B] @ 3" Spacings					OVERALL EXTERIOR DIMENSIONS IN.(mm) (Height Includes Casters)			NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
	18 x 26	14 x 18	TRAY/PAN SLIDES PROVIDED	18 x 26	12 x 20	14 x 18	GN 1/1	HIGH "H"	DEEP "D"	WIDE "W"			
ETC-1826-7INS Under Counter	7	14	7pr	7	7	14	7	30.25" (769)	32.5" (826)	23.25" (591)	1	3.5" ALL SWIVEL	185 (84)
ETC-1826-11INS	11	22	11pr	11	11	22	11	44" (1118)	36" (915)	27.5" (699)	1	5"	235 (107)
ETC-1826-16INS	16	32	16pr	16	16	32	16	59" (1499)	36" (915)	27.5" (699)	1	5"	300 (137)
ETC-1826-19INS	19	38	19pr	19	19	38	19	68" (1728)	36" (915)	27.5" (699)	1	5"	330 (150)
ETC-1826-30INS	30	60	30pr	30	30	60	30	58" (1474)	33.25" (845)	52" (1321)	2	6"	520 (236)

[A] Fixed slides accommodate: (1) 18" x 26" and (2) 14" x 18" trays/pans.

[B] Optional adjustable tray-slides accommodate: one (1) 18" x 26", one (1) 12" x 20", two (2) 14" x 18" and one (1) GN 1/1 containers. Uprights punched on 1.5" centers.

ETC-1826-INS models are available with:
Pass-thru Door [add "P"]
See-thru Lexan Door [add "L"]
Dutch Doors [add "D"]
Note: Dutch Doors are 2 half size doors only available on full-size models.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean covered corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing plates at corners.
INSULATION. "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides, and door(s).
HANDLES. Heavy-duty push bar handles, solid formed 1" x .375" thick; mounted at each end of unit. Mountings reinforced with stainless steel channel. ETC-1826-7INS model shall have recessed handles.

BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame with snap-in, non-marking vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning. ETC-1826-7INS is standard without a bumper.
CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. ETC-1826-30INS shall have a caster configuration of two (2) rigid, four (4) swivel with brake. ETC-1826-7INS shall have a

caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.
DOORS AND LATCHES. Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two (2) heavy-duty edgemount die cast hinges. Door latch shall be edgemounted, full grip,

and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.
FIXED RACK. Removable pair of one piece stainless steel racks with fixed spacing of 3" between pan slides. Each pan slide accommodates one (1) 18" x 26" or two (2) 14" x 18". One piece rack is easy to remove without the use of tools for cleaning.
INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

- OPTIONAL ACCESSORIES**
- DOORS**
- Dutch doors
 - Key locking door latch
 - Magnetic latch
 - Paddle latch
 - Padlocking transport latch
 - Left hand door hinging (single door models only)
- CASTERS**
- All swivel or larger casters
 - Floorlock (requires 6" casters)
- SPACINGS**
- Adjustable tray slides
 - Custom tray rack spacings
 - Shelves
- EXTRAS**
- Security packages
 - Tubular stainless steel push handles
 - Top corner bumper
 - Cold plate cartridge
 - Menu card holder
 - Dry erase board



FOOD WARMING EQUIPMENT COMPANY, INC.
 5599 HWY. 31 W. Portland, TN 37148
 800-222-4393 | WWW.FWE.COM | SALES@FWE.COM



FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.
 © 19 Food Warming Equipment Company, Inc. | R.19.01