

Anets GoldenGrill™ Standard Gas Griddle

Item No.

Reliable Even-Cooking Griddle Provides Outstanding Performance for Breakfast, Lunch or Dinner Menu Items

This series of griddles features exclusive plate temperature sensors which respond to temperature fluctuations quickly. Precise thermostats allow separate heat zones for different products. Cook foods to golden perfection with Anets GoldenGrill™ Gas Griddle.



A24x48G shown on legs

STANDARD FEATURES

- High nickel content 3/4" (1.9 cm) Precision ground hot rolled steel plate
- One burner per 30,000 BTUH (8.8kW) (32Mj) per burner
- Stainless steel front, sides, grease trough and splashguards
- Manual Burner Control
- 100% gas safety valve shut-off
- Double wall construction keeps the operator and kitchen cool
- No electrical connection required
- Front grease trough allows for more usable griddle surface
- Extra large grease chute opening equipped with built in spatula scraper
- Large capacity 5.7 quart (5.39 L) grease drawer easily accessible under cabinet and equipped with anti-splash guards. (72" model is equipped with 2 drawers)
- Griddle top 1 year warranty



A24x30G shown on optional stainless Steel stand with undershelf

ANETS GoldenGRILL™



ANETS INC PO BOX 501, CONCORD, NH 03302-0501
553 ROUTE 3A, BOW, NH 03304 TEL: 603-225-6684, FAX:603-225-8497
L10-516 R7 www.anets.com

We reserve the right to change specifications without notice and without incurring any Obligation for equipment previously or subsequently sold.



SPECIFICATIONS

Model	AG Models (See Chart below)
Certification	CSA, NSF, CE
BTUH/kW/mjh	See Chart below
Gas Pressure	NG 3.5" WC (8.7 mbar) (0.87 kPa) LP 10" WC (25 mbar) (2.5 kPa)
Gas Connection	3/4" NPT (1.9 cm) (19 mm)
Electrical Requirements	None
Plate	High nickel content 3/4" (1.9 cm) precision ground hot rolled steel plate
Burners	Aluminized steel
Thermostats	Gas operated
Temperature Range	200° to 550°F, (93°-288°C)
Cabinet	Front, sides, trough and splashguard, stainless steel back, aluminized steel

STANDARD ACCESSORIES:


- 4" (10.2 cm) adjustable chrome plated legs
- Stainless Steel Sides

Chrome Griddle Cleaning Kit (SGC): Only sent with Chrome Upgrade


- 4" (10.2 cm) Scraper w/ 10 replacement blades
- 1 can ANETS ALLSHINE cleaner
- Cleaning brush

OPTIONS AND ACCESSORIES:


- Chrome Top Plate
- Stainless steel stand
- Removable cutting board and bracket assembly
- Companion griddle stand use griddle stand model AGS
- 11" inch (28 cm) High backsplash
- Snap Action Thermostat- upgrade includes: safety pilot and spark ignitor, 100% gas shut off valve and Piezo electric.

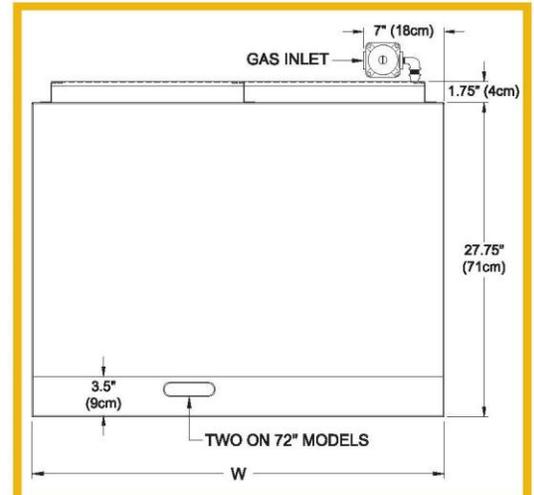

Top View

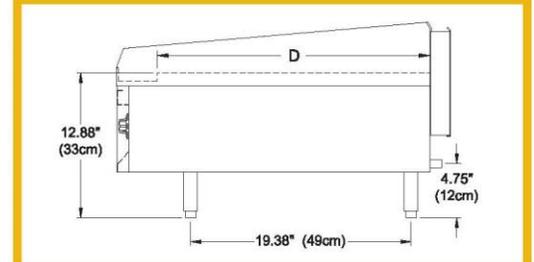

Side View

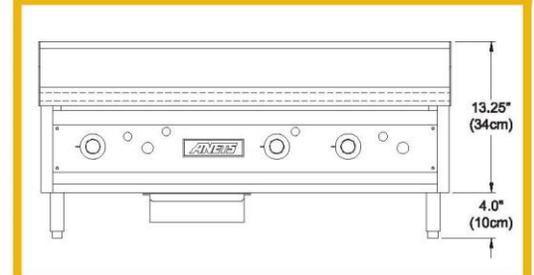

Front View

DIMENSIONS						
24 MODELS						
Overall		A24x24G	A24x36G	A24x48G	A24x60G	A24x72G
	(W) Width	24.25" (61.6 cm)	36.25" (92.1 cm)	48.25" (122.5 cm)	60.25" (153.1 cm)	72.25" (183.5 cm)
	Height	17.25" (43.8 cm)	17.25" (43.8 cm)	17.25" (43.8 cm)	17.25" (43.8 cm)	17.25" (43.8 cm)
	Depth	29.75" (75.5 cm)	29.75" (75.5 cm)	29.75" (75.5 cm)	29.75" (75.5 cm)	29.75" (75.5 cm)
Plate						
	Width	24" (61 cm)	36" (91 cm)	48" (122 cm)	60" (152 cm)	72" (183 cm)
	(D) Depth	24" (61 cm)	24" (61 cm)	24" (61 cm)	24" (61 cm)	24" (61 cm)
	NG BTUH	60,000 (17.5 kW)	90,000 (26.4 kW)	120,000 (35.1 kW)	150,000 (44.2 kW)	180,000 (53.1 kW)
	LP BTUH	53,000 (15.5 kW)	80,000 (23.4 kW)	107,000 (31.3 kW)	133,000 (38.9 kW)	160,000 (46.8 kW)

Current construction on 24", 36" and 48" wide griddles are 1/2" (1.27 cm) (12.7 mm) taller than indicated in drawing. Current construction subject to change. Contact factory for current dimensions if required.



ANETS INC PO BOX 501, CONCORD, NH 03302-0501
553 ROUTE 3A, BOW, NH 03304 TEL: 603-225-6684, FAX: 603-225-8497
L10-516 R7 www.anets.com

We reserve the right to change specifications without notice and without incurring any obligation for equipment previously or subsequently sold.