



NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-6149 FAX
www.norlake.com

OPEN FRONT MILK COOLERS

OPEN FRONT MILK COOLERS



AR122-A

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: AR082-A, AR122-A & AR162-A

- **Exterior Finish:** The self-service doors are stainless steel, the remaining exterior is white enamel over smooth steel. The remaining exterior is available in stainless steel (shown). There are no exposed raw edges since all exterior joints and seams fold in without lap joints.
- **Interior Finish:** The self-service doors and the remaining interior is galvanized steel. Stainless steel interior is available as an option.
- **Insulation:** The cabinet is insulated with 2 inches foamed-in-place polyurethane insulation.
- **Hardware:** The milk coolers are equipped with easy roll locking swivel casters and heavy duty floor racks. The gasketed, insulated door with chrome plated hinges opens for small child self service, closes and locks. A drain is standard with every unit.
- **Instrumentation:** Thermometer measures temperature in °F.
- **Refrigeration:** Self-contained R290 refrigeration system. The evaporator is a cold wall evaporator in the cabinet with no moving parts which allows more room for product. The condenser is an air cooled, copper tube and aluminum finned coil which is mounted on the base of the unit. Compressor is 1/5 HP. Adjustable temperature control to optimize product temperature. Operating temperature: 38°F.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug.
- **Capacity:**

| | Cases with Cartons | | | | Loose Carton (without cases) | | | |
|----------|--------------------|---------|---------------|---------|------------------------------|-------|--------------------|-------|
| | 13 x 13 x 11H | | 19 x 13 x 11H | | Flat Top | | Peaked Top (Gable) | |
| | Cases | Cartons | Cases | Cartons | 1/2 Pt. | 1 Pt. | 1/2 Pt. | 1 Pt. |
| AR082-A: | 8 | 352 | 4 | 288 | 864 | 432 | 680 | 430 |
| AR122-A: | 12 | 528 | 8 | 576 | 1368 | 684 | 1020 | 645 |
| AR162-A: | 16 | 704 | 12 | 864 | 1800 | 900 | 1360 | 860 |

STANDARD FEATURES

- Adjustable temperature control
- Air cooled condensing unit
- Cold wall evaporator
- Exterior stainless steel doors
- Fold back doors
- Four swivel casters, two locking
- Gasketed locking doors
- Epoxy coated heavy duty floor racks
- White exterior
- Interior galvanized steel
- Keyed lock
- NSF listed thermometer and drain
- Corner bumpers
- Operating temperature: 38°F
- Power cord and plug furnished
- **Stocked for same day shipment**
- UL, C-UL, UL Sanitation listed**
- Warranties: 3 year parts and labor, 5 year construction, 5 year compressor


OPTIONAL FEATURES*

- Laminate for top, front, sides and back
- Stainless steel exterior
- Stainless steel interior


*Most options are available one week from receipt of order. Please contact us for specific questions.

**C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

**UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

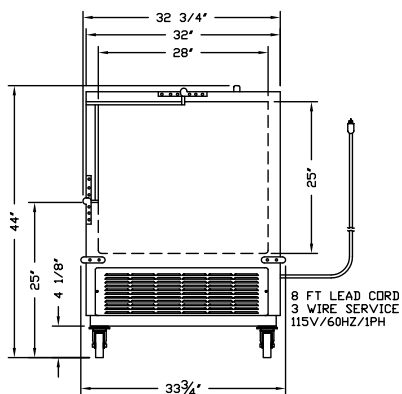


SIDE VIEW (ALL MODELS)

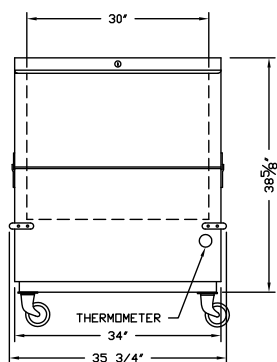


FRONT

AR082-A




TOP

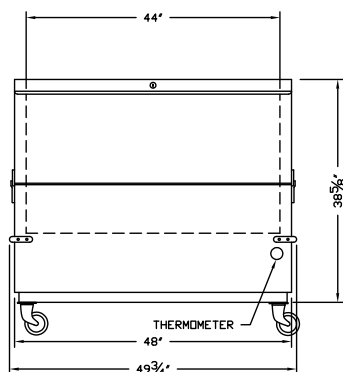


FRONT

AR122-A




TOP

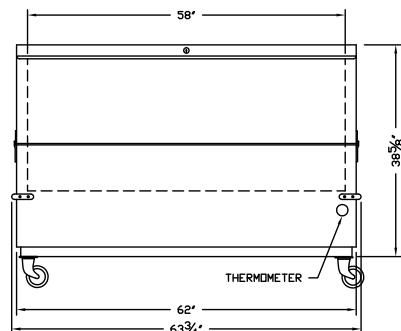

FRONT

AR162-A

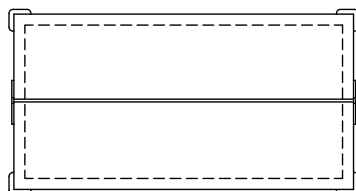

TOP

SPECIFICATIONS

| Model | AR082-A | AR122-A | AR162-A |
|---------------------------------|----------|----------|----------|
| Crated Height | 43" | 43" | 43" |
| Crated Width | 37-1/2" | 51-1/2" | 65-1/2" |
| Crated Depth | 36" | 36" | 36" |
| Crated Weight (lbs.) | 326 | 352 | 484 |
| Interior Height | 25" | 25" | 25" |
| Interior Width | 30" | 44" | 58" |
| Interior Depth | 28" | 28" | 28" |
| Overall Height | 44" | 44" | 44" |
| Overall Width | 35-3/4" | 49-3/4" | 63-3/4" |
| Overall Depth | 33-3/4" | 33-3/4" | 33-3/4" |
| Gross Cubage (ft ³) | 12.15 | 17.8 | 23.5 |
| Number of Floor Racks | 2 | 3 | 4 |
| Number of Casters | 4 | 4 | 4 |
| Condensing Unit Size | 1/5 HP | 1/5 HP | 1/5 HP |
| Refrigerant | R290 | R290 | R290 |
| Electrical Characteristics | 115/60/1 | 115/60/1 | 115/60/1 |
| Cord and Plug Furnished | Yes | Yes | Yes |
| Nema Plug Configuration | 5-15P | 5-15P | 5-15P |
| Total Amp Draw | 1.5 | 1.5 | 1.5 |

Specifications subject to change without notice.



Revision Date: 1/19
Part Number: 090743