NOR-LAKE, INCORPORATED 727 Second Street Hudson, WI 54016 800-955-5253 715-386-2323 866-961-5253 Parts 800-388-5253 Service 715-386-4291 FAX www.norlake.com



ADVANT**EDGE™ R**EACH-IN **R**EFRIGERATORS



SPECIFICATIONS FOR: NLR23-S, NLR49-S, NLR72-S

- Exterior Finish: Exterior front sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- Interior Finish: Interior liner and interior door panel are stainless steel.
- Insulation: The complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- <u>Hardware:</u> Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self adjusting magnetic gaskets;
 4" dia. casters (4 casters on one and two door models and 6 casters on three door model). 4 vinyl coated shelves per door section standard.
- <u>Electrical:</u> An interior incandescent light is activated by a switch for each door.
- Instrumentation: Microprocessor with digital display allows temperature adjustment at control panel.
- Refrigeration: Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Drain line is recessed in cabinet back.Refrigerant flow is controlled by a capillary tube. R-134a refrigerant in NLR23 and NLR49, R404a in NLR72. Operating temperature range: +34°F to +38°F.
- <u>Approvals:</u> UL, C-UL, ETL Sanitation

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
 Operating temperature range: +34°F to +38°F
- Polyurethane insulation
 R-134a refrigerant for NLR23
- & NLR49
- R-404a refrigerant for NLR72
 Otainland stabilizer and
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation
- Warranties: 3 year parts and labor, 5 year compressor

OPTIONAL FEATURES*

- Extra shelves
- Field reversible hinge kit for single door models (part # 146524)
- Pan slide rack (part # 146515)




Nor-Lake, Inc. Registered to ISO 9001:2008 File No. 10001816

²⁰⁰⁸ SPECIFICATION


2 & 3 DOOR REFRIGERATORS


- * Most options are available two weeks from receipt of order. Please contact us for specific questions. ** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.
 - ** ETI-Sanitation is Intertek Laboratories Safety Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.

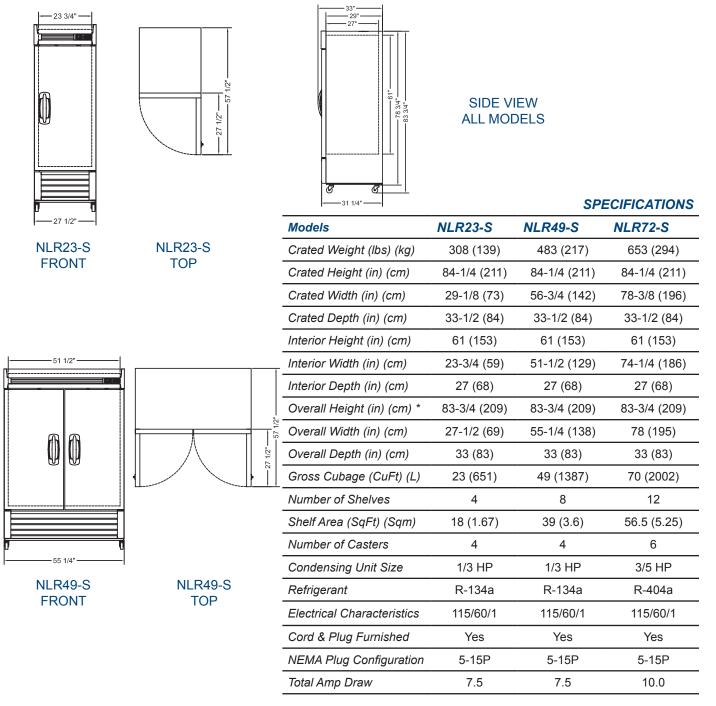

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters.





NLR72-S

TOP



Revision Date: 03/17 © 2014 NOR-LAKE, INC. Printed in the U.S.A. Part Number: 138688