




MODELS MOD-500, MOD-500D MOD-500T, MOD-500TD MOD-500DM, MOD-500TDM BUILT-IN MODULAR WARMERS

DIMENSIONS:

INCH
(MM)

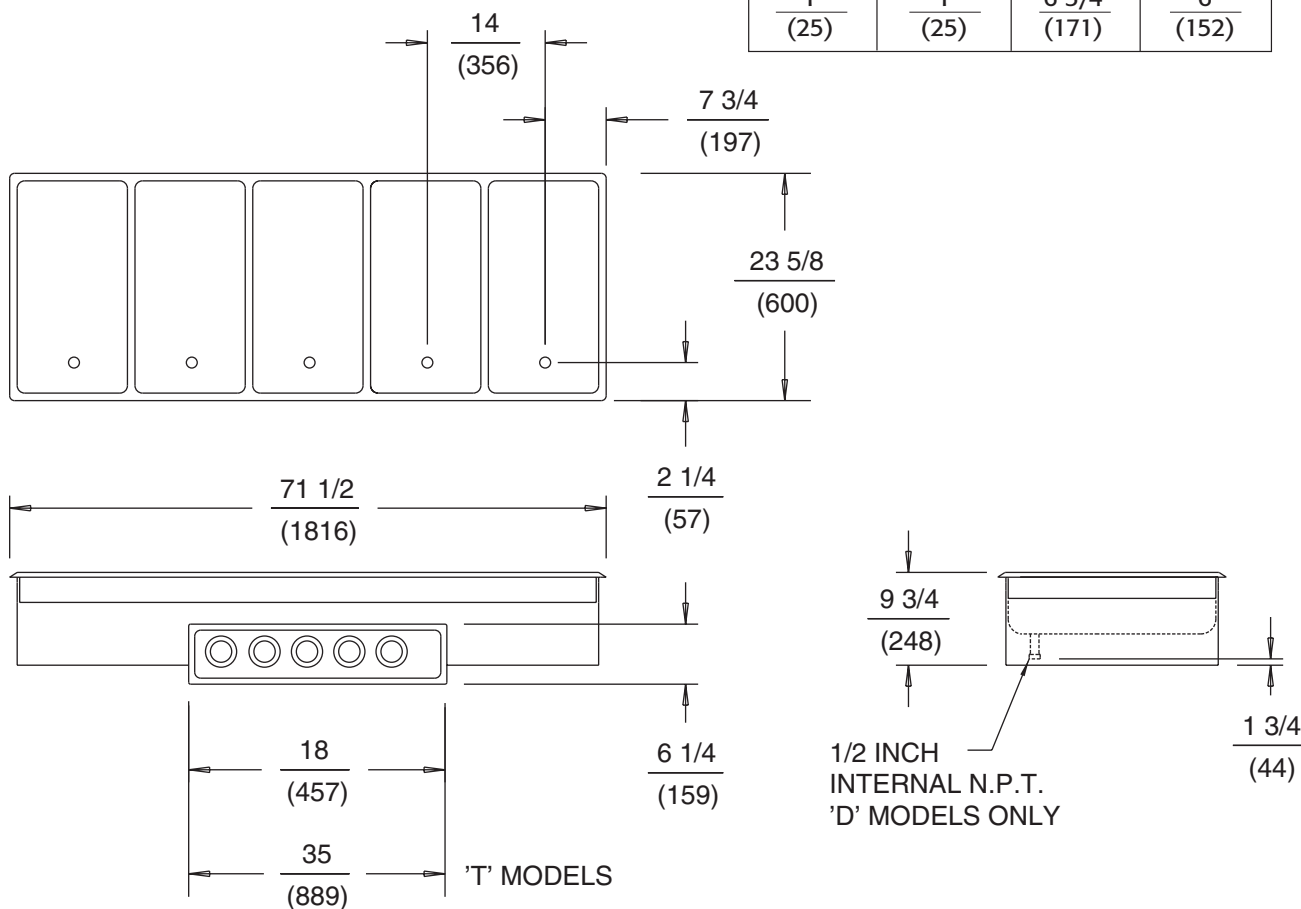

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE.			
BACK	SIDE	BOTTOM	FRONT
1 (25)	1 (25)	6 3/4 (171)	6 (152)

MOD-500, MOD-500D, MOD-500T, MOD-500TD, MOD-500DM AND MOD-500TDM ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3			AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3		
MOD-500	208	4500	15.0	11.2	11.2	21.6	NONE
MOD-500	240	6000	17.0	13.0	13.0	25.0	NONE
MOD-500T	208	6200	19.5	14.6	14.6	29.8	NONE
MOD-500T	240	8250	22.1	16.9	16.9	34.4	NONE

All models with a 'D' or 'DM' suffix have the same electrical specs as the standard MOD-500 or MOD-500T models.

NOTE: Specifications are subject to change without notice. See installation instruction sheet prior to installing the unit. This document is not for installation purposes. The Drain Manifold with Valve (1" internal N.P.T.) is supplied for DM & TDM models only.

WELLS MANUFACTURING COMPANY
2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972
FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com
A SPECIALTY EQUIPMENT COMPANY • 2000 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 7/00 • REV(G) • PART NO. 37099

