

Product Specifications

Refrigerated Self-Service Under Counter Case

- CO33R-UC-E3
- CO43R-UC-E3
- CO53R-UC-E3
- CO63R-UC-E3

Lengths include end panels
 36-1/4"L x 32-3/8"D x 32-3/4"H
 47-1/4"L x 32-3/8"D x 32-3/4"H
 59-1/4"L x 32-3/8"D x 32-3/4"H
 71-1/4"L x 32-3/8"D x 32-3/4"H



MODEL SHOWN: CO43R-UC-E3

NOTE: SHOWN BEHIND CUSTOMER SUPPLIED COUNTER



STANDARD FEATURES

- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- Casters (non-locking) w/ levelers
- Compressor air rear intake, front discharge at toe kick. Front and rear panels cannot be blocked. Must remain 4" from wall
- Condensate pan (self-contained refrig. only)
- Flat front panel
- Integrated average product temperature of 40°F or less
- LED 3500K top light(s)
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Toe kick, black


| Features | Standard | Options |
|----------------------------|---|---|
| MODEL CONFIGURATION | <input type="checkbox"/> Undercounter height (-UC) Undercounter ht. 32-3/4"H; front panel extends over end panels to blend w/adj. counters (supplied by others). Counter surface (supplied by others) extends over top of unit | |
| EXTERIOR COLOR | <input type="checkbox"/> Black | |
| INTERIOR COLOR | <input type="checkbox"/> Black interior | |
| END PANEL LEFT | <input type="checkbox"/> Square full end panel w/mirror | |
| END PANEL RIGHT | <input type="checkbox"/> Square full end panel w/mirror | |
| EXTERIOR BACK PANEL | <input type="checkbox"/> Solid back panel, black | |
| ELECTRICAL CONNECT | <input type="checkbox"/> 6' straight blade power cord (self-cont.) | |
| REFRIGERATION | <input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration | |
| MISCELLANEOUS | | <input type="checkbox"/> Second year parts & labor warranty (excludes compressor) |

Product Specifications

| | | |
|--|---|----------------------------------|
| Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below. | | |
| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
| 1 | Packaged refrigerated products | 40 |

PLAN VIEW

SIDE VIEW

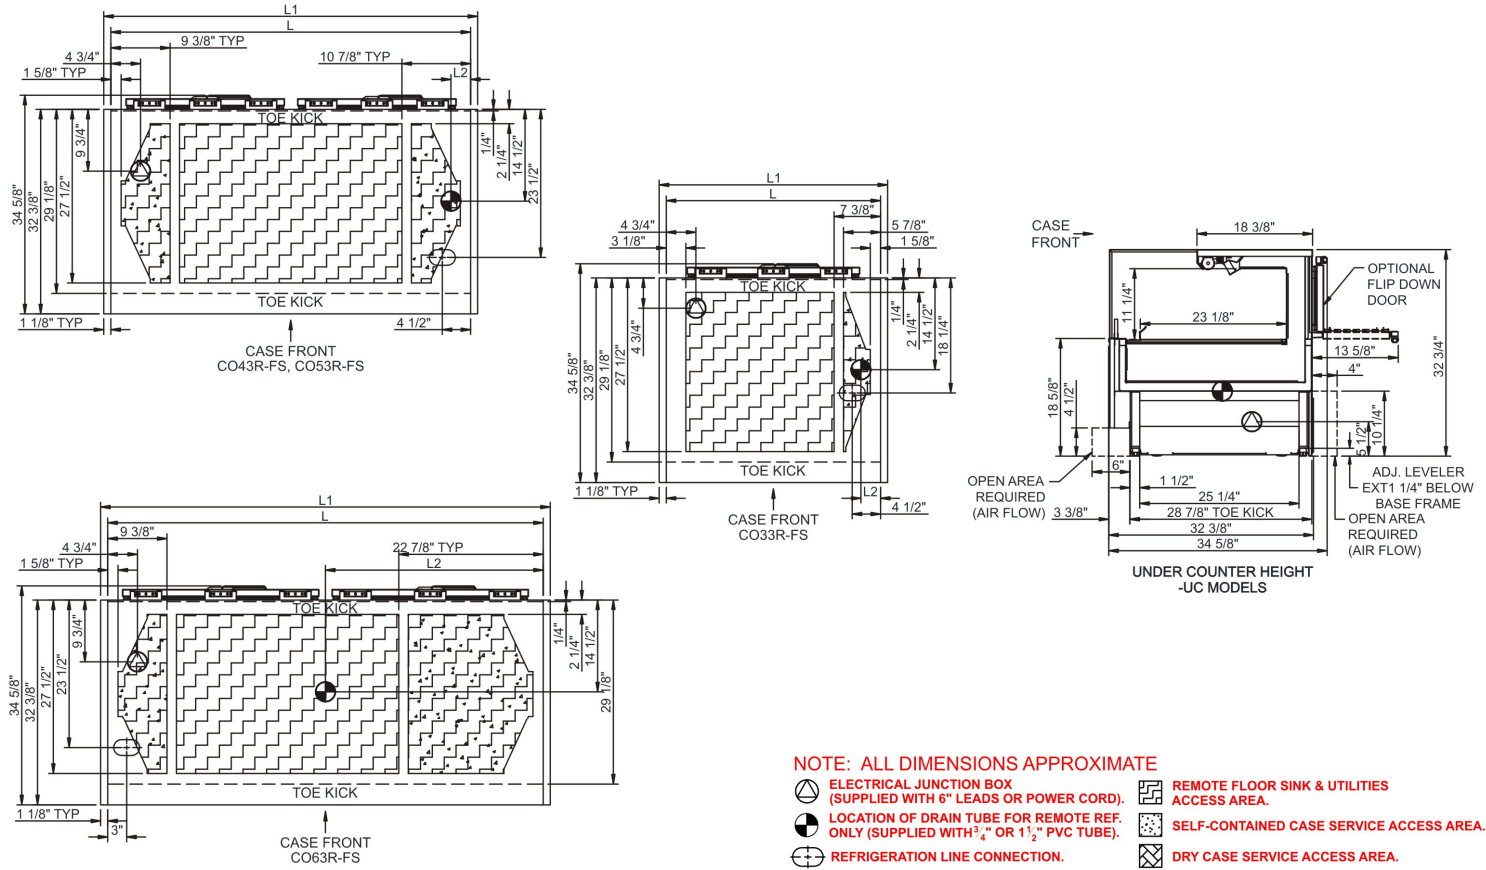

Model Technical Specifications

| Model | L" | L1" | L2" | System | Circuit Volts | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug | SST | Conv. Rack BTUH | Para. Rack BTUH | Est Wt |
|-------------|-----|-------|-------|-----------------|---------------|---------|------|----------|-------|-------|-----------|-----------------|-----------------|-----------------|--------|
| CO33R-UC-E3 | N/A | 36.25 | 3.13 | Remote(Type I) | Circuit #1 | 110-120 | 1 | 60 | 1.12 | 36 | 2+G | 20.00 | 1426 | 1320 | 650 |
| | | | | Remote(Type II) | Circuit #1 | 110-120 | 1 | 60 | 1.12 | 42 | 2+G | 20.00 | 1706 | 1580 | |
| | | | | Self-Contained | Circuit #1 | 110-120 | 1 | 60 | 11.98 | 1,050 | 2+G | 5-15P or L5-15P | N/A | N/A | |
| CO43R-UC-E3 | N/A | 47.25 | 3.13 | Remote(Type I) | Circuit #1 | 110-120 | 1 | 60 | 1.14 | 40 | 2+G | 20.00 | 1620 | 1500 | 700 |
| | | | | Remote(Type II) | Circuit #1 | 110-120 | 1 | 60 | 1.14 | 40 | 2+G | 20.00 | 1922 | 1780 | |
| | | | | Self-Contained | Circuit #1 | 110-120 | 1 | 60 | 12.00 | 1,053 | 2+G | 5-15P or L5-15P | N/A | N/A | |
| CO53R-UC-E3 | N/A | 59.25 | 3.13 | Remote(Type I) | Circuit #1 | 110-120 | 1 | 60 | 1.22 | 52 | 2+G | 20.00 | 2052 | 1900 | 750 |
| | | | | Remote(Type II) | Circuit #1 | 110-120 | 1 | 60 | 1.22 | 52 | 2+G | 20.00 | 2419 | 2240 | |
| | | | | Self-Contained | Circuit #1 | 110-120 | 1 | 60 | 15.56 | 1,318 | 2+G | 5-20P or L5-20P | N/A | N/A | |
| CO63R-UC-E3 | N/A | 71.25 | 34.50 | Remote(Type I) | Circuit #1 | 110-120 | 1 | 60 | 1.56 | 75 | 2+G | 20.00 | 2527 | 2340 | 850 |
| | | | | Remote(Type II) | Circuit #1 | 110-120 | 1 | 60 | 1.56 | 75 | 2+G | 20.00 | 2981 | 2760 | |
| | | | | Self-Contained | Circuit #1 | 110-120 | 1 | 60 | 16.00 | 1,355 | 2+G | 5-20P or L5-20P | N/A | N/A | |

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

| | |
|------------|--|
| All Models | Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7 |
|------------|--|



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- ELECTRICAL NOTE:** If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 33" Minimum entry door clearance required (w/out shipping skid)
- Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.