

Product Specifications

Combination Convertible Service Above Refrigerated Self-Service Case



MODEL SHOWN: HMBC4-E3
W/ CUTAWAY END PANEL

NOTE: NON-DIVIDED UPPER DISPLAY AREA - HMBC2-E3 & HMBC3-E3
DIVIDED UPPER DISPLAY AREA - HMBC4-E3, HMBC5-E3 & HMBC6-E3

- ☐ HMBC2-E3
- ☐ HMBC3-E3
- ☐ HMBC4-E3
- ☐ HMBC5-E3
- ☐ HMBC6-E3

Lengths include end panels
27"L x 34-1/4"D x 56-1/4"H
39"L x 34-1/4"D x 56-1/4"H
51"L x 34-1/4"D x 56-1/4"H
62-7/8"L x 34-1/4"D x 56-1/4"H
75-3/8"L x 34-1/4"D x 56-1/4"H

STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Clear glass shelf, lighted (LED) in upper display
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refig. only)
- Convertible baffle in upper display
- Curved double pane, lift-up front glass w/o lock
- Cutaway end panels
- Flat front panel
- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Rear sliding doors (26" model swinging)

Features	Standard	Options
EXTERIOR COLOR	☐ Black	
INTERIOR COLOR	☐ Black	
REAR EXTERIOR COLOR	☐ Painted - White	
TRIM COLOR	☐ Black	
BASE	☐ Levelers	
LOWER REAR	☐ Solid back panel	
UPPER REAR	☐ Clear glass rear sliding doors w/o lock (26" model swinging) (specify LH or RH hinge)	
ELECTRICAL CONNECT	☐ 6' straight blade power cord (self-cont.)	
REFRIGERATION	☐ Breeze™ w/EnergyWise s/c refrigeration	
MISCELLANEOUS		☐ Second year parts & labor warranty (excludes compressor)

Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.


Zone **Intended Product To Be Displayed**

All Packaged refrigerated products


Warmest Avg Prod Temp ° F

40

PLAN VIEW

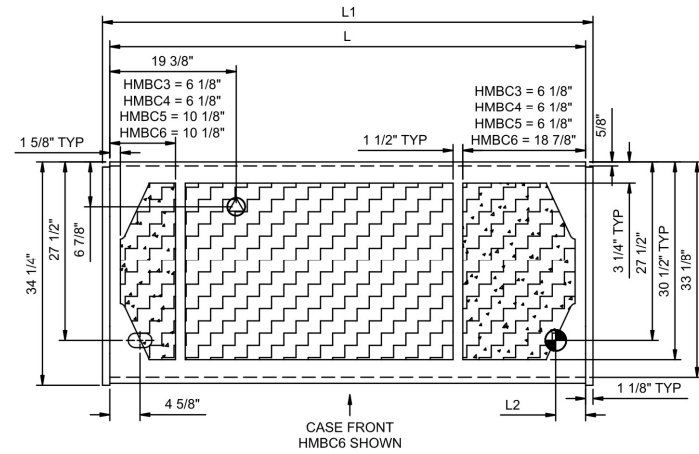

SIDE VIEW

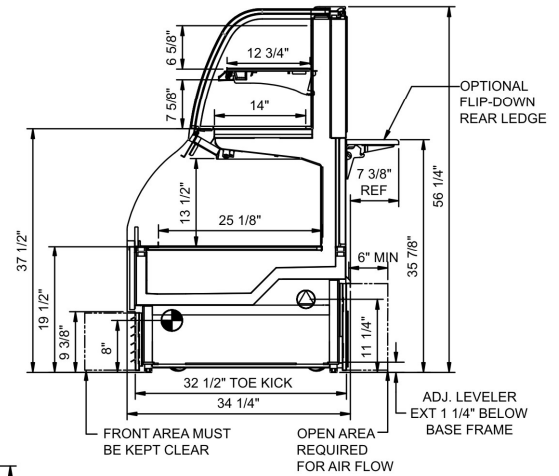

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Est Wt
HMBC2-E3	N/A	27.00	3.63	Self-Contained	Circuit #1	110-120	1	60	14.92	1,415	2+G	5-20P or L5-20P	N/A	N/A	750
HMBC3-E3	N/A	39.00	4.63	Self-Contained	Circuit #1	110-120	1	60	15.84	1,502	2+G	5-20P or L5-20P	N/A	N/A	900
HMBC4-E3	N/A	51.00	4.63	Self-Contained	Circuit #1	120/230V	1	60	10.19	1,763	3+G	14-20P or L14-20P	N/A	N/A	1,000
HMBC5-E3	N/A	62.88	4.63	Self-Contained	Circuit #1	120/230V	1	60	11.23	2,172	3+G	14-20P or L14-20P	N/A	N/A	1,100
HMBC6-E3	N/A	75.38	4.63	Self-Contained	Circuit #1	120/230V	1	60	12.00	2,091	3+G	14-20P or L14-20P	N/A	N/A	1,200

*** Does not include electric defrost on freezer models.

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 35" Minimum door entry clearance required (without shipping skid).

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant