



## Designed For High Volume Applications Reduces Noise and Work Area Heat Build-up

The **SaniServ** Model ROC2361 (by Copeland®) Remote Condensing Unit, can be used with any SaniServ remote ready dispensing unit.

# ROC2361


## Remote Condensing Unit

### Unit includes:

- Outdoor rated, 2 H.P. condenser
- Galvanized all-weather enclosure
- Contactor mounted and wired
- High and low pressure controls mounted and wired separately
- Immersion type crankcase heater

### Optional:

- 25', 50' and 75' pre-charged lines available

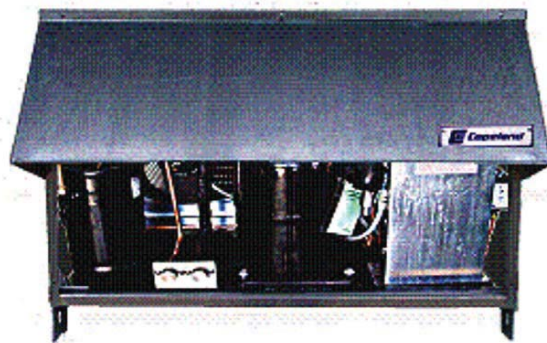

We reserve the right to change specifications and products design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment

### Specifications

#### Mechanical

Unit Height (in):	18.9
Unit Length(in):	25.1
Unit Width (in):	31.4
Ship Weight (lbs):	202.0
Condenser Type:	Air
Copevap Water Storage:	NA
Receiver Capacity (lbs):	10.3
Liquid Connection Size (in)/Type:	3/8 S
Suction Connection Size (in)/Type:	7/8 S
Discharge Line Size (in):	3/8
Water Inlet ("):	
Water Outlet ("):	
Oil Type:	POE
Oil Recharge Amount (oz):	45

#### Electrical

Max Fuse Size:	25
Min Circuit Ampacity:	17.8
Compressor:	CS14K6E-PFV-273
Compressor LRA - Low:	
Compressor LRA - High:	61.0
Compressor LRA - Half Winding:	
Compressor RLA:	12.4
UL:	Listed
UL File #:	SA633
UL Guide Card:	LZFE
CSA:	Certified
CSA File #:	LR58386
Amps Per Motor:	0.85
Fan Motor Quantity:	2

#### Air - Cooled Unit Performance

Release Date:	06-Jun-2002	Return Gas Temp. (°F):	40
Compressor:	CS14K6E-PFV-273 x 1	Subcooling (°F):	5
Performance No:	3755	Air Flow Rate (CFM):	1680
90°F Ambient Air Temperature			
Evap. Temp.	Unit Capacity	Cond. Temp.	Temp. Diff.
(°F)	(Btu/hr)	(°F)	(°F)
-5	9,030	105.5	15.5
0	10,400	107.4	17.4
5	11,900	108.8	18.8
10	13,400	110.6	20.6
15	14,900	112.4	22.4
20	16,400	114.1	24.1
25	17,900	115.9	25.9