

| Project:  |           |
|-----------|-----------|
| Location: |           |
| Item #:   | Quantity: |
| Model #:  |           |

MODEL: IDC-VAR12H

DISPLAY CASES - Pastry Curved Glass

Important: Remove products every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.





## **General Strengths**

- Sanitation. The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- Control systems. Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- Modular Line. Closed and open angles to adapt the elements to a determinate space. Designed for pastry, Viennese breads and bakery.

- 100% Tested. All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- Certified. Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- Lighting. Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

| MODEL       |        | Dimensions<br>inches) (mr |      | Nº   | Ref.  | Ref.<br>Weight<br>(Lbs.) (gr.) | Temp.<br>Range<br>(°F) (°C) | Capacity<br>(Cu. Ft.)<br>(L) | Cond.<br>Unit.<br>H.P. | Case<br>Amps | Crated<br>Weight |
|-------------|--------|---------------------------|------|------|-------|--------------------------------|-----------------------------|------------------------------|------------------------|--------------|------------------|
|             | W      | D                         | Н    | Pans |       |                                |                             |                              |                        |              | (Lbs.)<br>(Kg.)  |
| IDC-VAR12H  | 52-3/8 | 45                        | 52   | 14   | R404A | 1.65                           | -2°F/+5°F                   | 3.45                         | 1-1/4                  | 5.8 (230V)   | 530              |
| IDO VARIZII | 1330   | 1160                      | 1320 |      |       | 750                            | -18°C/-15°C                 | 100                          |                        | 4.9 (115V)   | 243              |

Infrico USA Corp.

7042 N.W. 46th Street

Miami, FL 33166

1.305.777.9599 Office 1.305.777.9598 Fax

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE







www.infrico.us service@infrico.com sales@infrico.com

APPROVALS: AVAILABLE AT:



| Project:  |           |
|-----------|-----------|
| Location: |           |
| Item #:   | Quantity: |
| Model #:  |           |

MODEL: IDC-VAR12H

DISPLAY CASES - Pastry Curved Glass

### STANDARD FEATURES

### Exterior

- White compact quartz worktop,
- Lift-up curved tempered security glass system,
- Pull down night curtain on the back,
- ABS thermoformed decoration, White RAL 9016 or Black RAL 9017 standard decoration,
- Built-in casters and levelling feet.

#### > Interior

- AISI 304 Stainless Steel exhibition area,
- LED Lighting in the back and front,
- Case is compatible with standard 5 Liter Gelato Pans (14-1/8"x6-1/2"x5-7/8"), pans included.

#### **OPTIONAL FEATURES**

- ✓ Customizable decoration for lower front and side panels,
- Optional decoration: Red RAL 3001, Blue RAL 5015, Orange RAL 2003, Pistachio RAL DESIGN 1107060,
- Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

#### > Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

### Refrigeration


- Digital temperature controller with automatic defrost
- Temperature display on front,
- Stainless steel evaporative pan,
- Forced air refrigeration system,
- Case engineered to operate at 75°F (25°C). and 55% relative humidity,
- Refrigeration capacity: 3275 Btu/h(-31°F)/ 960 W(-35°C).

## Electrical



- Cord and NEMA L14-30P plug,
- Electrical connection are 230V (Compressor) and 115V (Digital Control) / 1ph / 60 Hz.
- ETL Listed to UL471 Standard and Sanitation classified to NSF7.

# **PLAN VIEW**

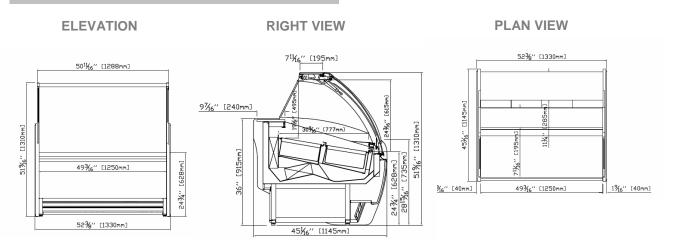

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE











www.infrico.us service@infrico.com sales@infrico.com

APPROVALS: AVAILABLE AT:

