



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

MODEL: **IRR-AGB49**

**REACH-IN:**  
**Top Mounted Reach-in Refrigerators**



### General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGB49	54-1/2	31-1/4	84	2	6	R134a	0.93	33°F/38°F 0°C/4°C	49 1300	1/2	7.0	507 230
	1385	794	2125									

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 7042 N.W. 46th Street  
 Miami, FL 33166  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

**www.infrico.us**  
 service@infrico.com  
 sales@infrico.com

**APPROVALS: AVAILABLE AT:**

Follow us:

Revision: 04 Date: 01/22/2015 AGB49\_FT\_62\_4



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

MODEL: **IRR-AGB49**

**REACH-IN:**  
**Top Mounted Reach-in Refrigerators**

## STANDARD FEATURES

### ➤ Exterior

- AISI 304 Stainless Steel.

### ➤ Interior

- AISI 304 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- LED lighting,
- Internal drain plug for easy cleaning.

### ➤ Doors

- Polyurethane insulated door,
- Self closing door with stay open feature,
- Stainless Steel heavy-duty hinges,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Field reversible door,
- Door locks,
- Full-height door opening: 23"x53" (584x1346 mm).

### ➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

### ➤ Casters

- 4" diameter casters.
- Locks provided on front set.

### ➤ Shelving

- (3) Three plastic coated wire shelves per door with stainless steel tray slides included,
- Dimensions WxD: 20-7/8"x25-5/8" (530x650 mm),
- Tray slides are compatible with 18"x26" (457x660 mm) and 12"x20" (305x660 mm) sheet pans,
- (3) Three plastic coated tray divider.

### ➤ Refrigeration

- Digital temperature controller with automatic defrost system,
- **Compact refrigeration system monoblock, INFRIBLOCK®**,
- Evaporative pan,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Refrigeration capacity: 1938 Btu/h (14°F) / 568 W (-10°C).

### ➤ Electrical

- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60 Hz.




- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

## OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf,
- ✓ Additional slide kits,
- ✓ Set of 6" legs, height adjustable from 5" to 8",
- ✓ Electrical connection is: 230V / 1ph / 50 Hz (plug type varies).

## PLAN VIEW

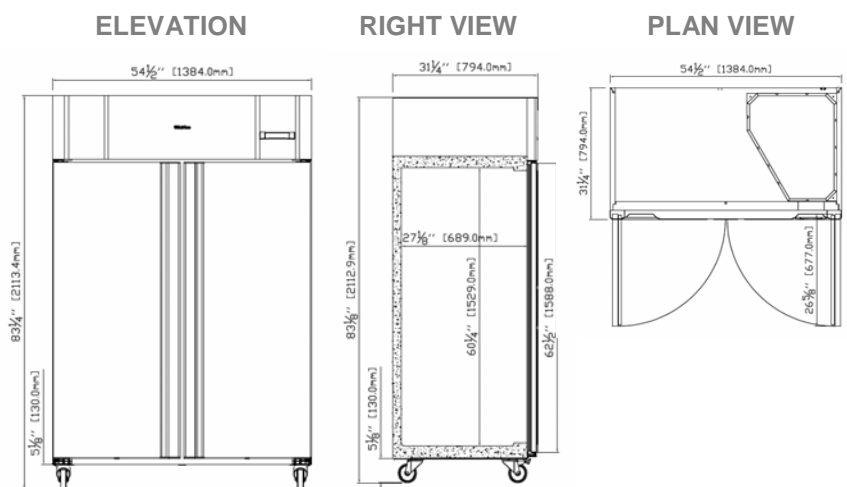

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
7042 N.W. 46th Street  
Miami, FL 33166  
1.305.777.9599 Office  
1.305.777.9598 Fax

**www.infrico.us**  
service@infrico.com  
sales@infrico.com

**APPROVALS: AVAILABLE AT:**

Follow us:

Revision: 04 Date: 01/22/2015 AGB49\_FT\_62\_4