

Project:

Location:\_ Item #:

\_Quantity:\_

Model #:\_

MODEL: IRR-AN49CR

REACH-IN: Bottom Mounted Reach-in Refrigerators (Glass Door)

## **General Strengths**

**Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.

**Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.

**Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.

**100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.

**Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

**Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

	MODEL	Dimensions (inches) (mm)			N⁰ Doors	N⁰ Shelves	Ref.	Ref. Weight	Temp. Range	Capacity (Cu. Ft.)	Cond. Unit.	Case Amps	Crated Weight
I		W	D	н	Doors	Sherves		(Lbs.) (gr.)	(°F) (°C)	(L)	H.P.	115 V.	(Lbs.) (Kg.)
Γ	IRR-AN49CR	54-1/2	31-3/8	83-3/8	2	8	R134a	0.75	33°F/38°F	49	5/8	11.6	538
		1385	800	2087				340	0°C/4°C	1388			244

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp. 7042 N.W. 46th Street Miami, FL 33166 1.305.777.9599 Office 1.305.777.9598 Fax www.infrico.us service@infrico.com sales@infrico.com APPROVALS: AVAILABLE AT:



# Project:

Location: Item #:

Quantity:

Model #:

(4) Four plastic-coated extra-dense wire shelves per

Tray slides are compatible with 18"x26" (457x660 mm)

Digital temperature controller with automatic defrost

Evaporator coil coated with anti-corrosion material

Refrigeration capacity: 2334 Btu/h (14ºF) / 684 W (-10ºC).

door with stainless steel tray slides included,

(4) Four plastic-coated extra-dense tray divider.

and 12"x20" (305x660 mm) sheet pans,

Stainless steel evaporative pan,

Forced air refrigeration system,

Cord and NEMA 5-15P plug.

Electrical connection is 115V / 1ph / 60 Hz.

ETL Listed to UL471 Standard and Sanitation

# MODEL: IRR-AN49CR

**REACH-IN:** Bottom Mounted Reach-in Refrigerators (Glass Door)

Shelving

Refrigeration

.

•

 $\triangleright$ 

Electrical

**PLAN VIEW** 

system,

100% Polyester,

classified to NSF7.

## **STANDARD FEATURES**

#### Exterior

. AISI 430 Stainless Steel.

# > Interior

- AISI 430 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- LED lighting, .
- Internal drain plug for easy cleaning.

# Doors

- Self closing door with stay open feature,
- Door locks,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Field reversible door,
- Door built-in Thermopane double glass,
- Full-height door opening: 23"x53" (584x1346 mm). .

#### Insulation


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect. .

#### Casters

- 4" diameter casters,
- Locks provided on front set.

## **OPTIONAL FEATURES**

- Stainless Steel wire shelf,
- Additional slide kits,
- Set of 6" legs, height adjustable from 5" to 8".
- Electrical connection is: 230V/1ph/50 Hz (plug type varies).

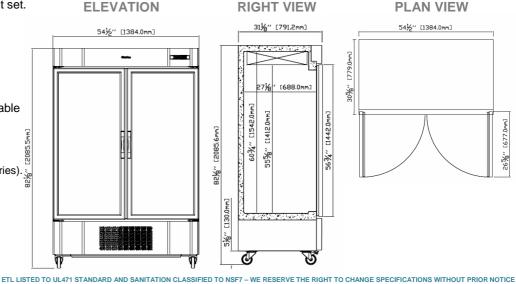



Infrico USA Corp. 7042 N.W. 46th Street Miami, FL 33166 1.305.777.9599 Office 1.305.777.9598 Fax

www.infrico.us service@infrico.com sales@infrico.com

APPROVALS: AVAILABLE AT:

Follow us: 📭 🚟 🕒