



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

**MODEL: IUC-MR67** **DEEP UNDERCOUNTER:**  
**Undercounter Refrigerators**



**General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

MODEL	Dimensions (inches) (mm)			N° Doors	N° Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IUC-MR67	67-3/8 1710	32-5/8 830	33-1/8 840	2	4	R134a	0.70 320	33°F/38°F 0°C/4°C	17 480	3/8	7.1	463 210

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
7042 N.W. 46th Street  
Miami, FL 33166  
1.305.777.9599 Office  
1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
service@infrico.com  
sales@infrico.com

APPROVALS: AVAILABLE AT:



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

**MODEL: IUC-MR67**

**DEEP UNDERCOUNTER:  
Undercounter Refrigerators**

**STANDARD FEATURES**

➤ **Exterior**

- AISI 304 Stainless Steel Top,
- AISI 430 Stainless Steel.

➤ **Interior**

- AISI 430 Stainless Steel,
- Internal drain plug for easy cleaning,
- Sealed interior floors and rounded cabinet corners.

➤ **Doors**

- Polyurethane insulated doors,
- Self closing doors with stay open feature,
- Stainless Steel heavy-duty hinges,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Field reversible doors,
- Door locks,
- Door opening: WxH= 22-7/8"x20-5/8" (580x525 mm).

➤ **Casters**

- 4" diameter casters,
- Locks provided on front set.

**OPTIONAL FEATURES**

- ✓ Set of 6" legs, height adjustable from 5" to 8",
- ✓ Stainless Steel wire shelves,
- ✓ Additional slide kits,
- ✓ Drawer kit,
- ✓ Single Overshelf,
- ✓ Double Overshelf,
- ✓ 4" Backsplash – Worktop,
- ✓ Electrical connection is:



220-230 V / 1ph / 50 Hz (plug type varies).

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ **Shelving**

- (2) Plastic coated wire shelves per section,
- Set of Stainless Steel shelf brackets,
- Easy remove for cleaning,
- Dimensions WxD: 20-7/8"x25-5/8" (GN 2/1) (530x650 mm),
- Compatible with 18"x26" (457x660 mm). sheet pans.

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Evaporative pan,
- Forced air refrigeration system,
- Extractable condensing unit for easy service,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Refrigeration capacity: 2126 Btu/h (14°F) / 623 W (-10°C).




➤ **Electrical**

- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60 Hz.



➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

**PLAN VIEW**

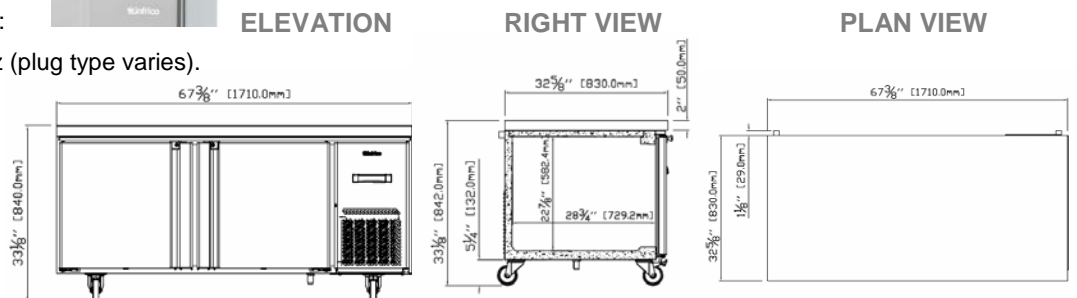

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
7042 N.W. 46th Street  
Miami, FL 33166  
1.305.777.9599 Office  
1.305.777.9598 Fax

**www.infrico.us**  
service@infrico.com  
sales@infrico.com

**APPROVALS: AVAILABLE AT:**