

SM-6378H

SOFT SERVE FREEZER

PRODUCT INFORMATION

Type	Floor Standing
Flavors	2 + Twist
Cooling	Air Cooled
Freezing Cylinders	2x 3.2 L / 3.4 qt
Product Mix Hoppers	2x 15.0 L / 15.9 qt
Output (4oz Servings)	80 qt / hr
	Max = Six, 4-6oz or One, 16oz serv/min per side
Motor	2x 1 HP, 750W
Compressor (Main)	2x 6500 BTU, R404A
Compressor (Auxilliary)	1x 480 BTU, R134A

FEATURES

Machine Controls	Dual, Digital
Refrigerated Hopper	Yes, Digital Control
Hopper Agitator	Yes
Temperature Display	Yes
Standby Mode	Yes
Low Mix Indicator Light	Yes
Low Mix Indicator Alarm	No
Low Temperature Protection	Yes
Motor Amperage Protection	Yes, Mechanical
High Pressure Protection	Yes
Thermal Overload Protection	Yes



Intertek



Intertek



SERVINGS PER MINUTE PER FLAVOR

4oz	6oz	8oz	16oz	32oz
5-6	3-4	2-3	1	1 every 2 minutes

DESCRIPTION

A high capacity, twin-twist, gravity feed, floor standing soft serve freezer. Capable of producing a variety of Soft Serve products including: Frozen Yogurt, Ice Cream, Custards, and Sorbets. Independent digital control systems automatically regulate and maintain consistent product quality on each side. Refrigerated hoppers and Standby Mode keeps product fresh, even overnight.

CUSTOM OPTIONS

Air Pump, Water Cooled, Air Chute, Spinner (1 or 2), 1 or 3-Phase Power Available, Heat Treatment

ELECTRICAL SPECIFICATIONS

	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1	1 x 30A	1 x 24A	2P / 3W
208-230/60/3*	1 x 30A	1 x 20A	3P / 4W

Electrical Plug: 1x NEMA L6-30 (2P) or 1x NEMA L15-30 (3P)



* Machine comes with 3-Phase Power standard

SIZE SPECIFICATIONS

	Machine		Shipping	
Weight	225 kg	496 lbs	245 kg	540 lbs
Depth (mm / in)	702*	27.7*	895	35.3
Width (mm / in)	532*	21.0*	715	28.2
Height (mm / in)	1562	61.5	1740	68.5

Shipping Volume: 1.15 CBM / 39.4 CBF

* Machine Requires Minimum 6" Clearance on all sides

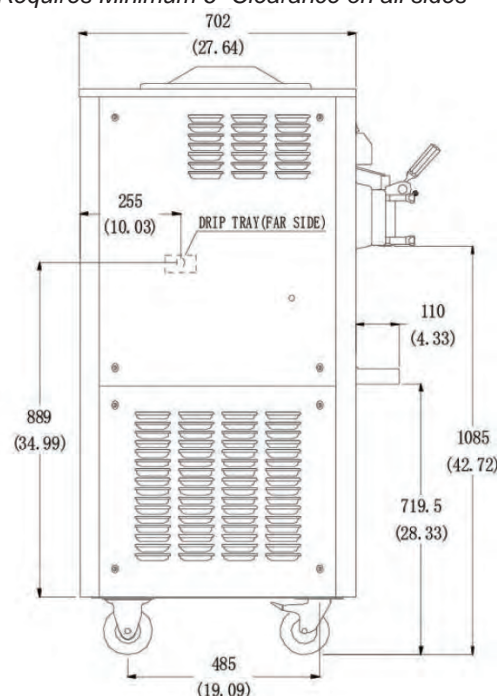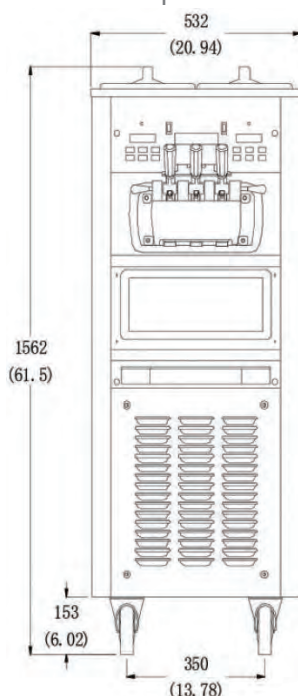

Tip: Making your own recipe? Purchase a brix refractometer - ideal brix range for soft serve is 20-30