

6450



FROZEN BEVERAGE FREEZER

Single flavor, Countertop

Product Offering

Vary your menu by offering frozen beverages, fruit juices and slushies'

Important:

Not intended for products that contain dairy

Freezing Cylinder

One, 15 Liters (15.85 quarts)

Indicator Lights

Add Mix Light alerts the operator to add mix. When Mix Out Light turns ON, the unit automatically shuts down to prevent damage.

Automatic Consistency Control

Specially designed viscosity control automatically maintains superior product quality. Adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

Output

17 Quarts/Hour

Safety Protections

High pressures switch prevents compressor overheat

Thermal overload protects from motor overheat



Model 6450





SPACEMAN USA

CORPORATE OFFICE: 4635 Nautilus Court South - Unit C | Boulder, CO 80301

PHONE: (888) 61 0-5520

WEB: WWW.SPACEMANUSA.COM

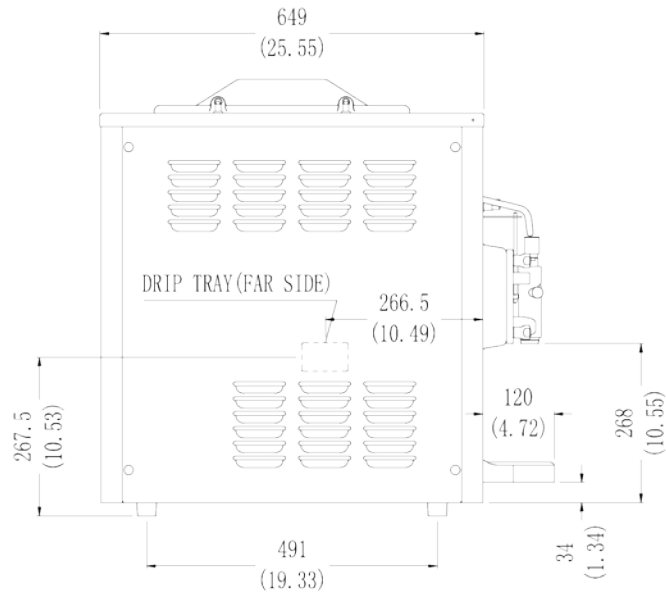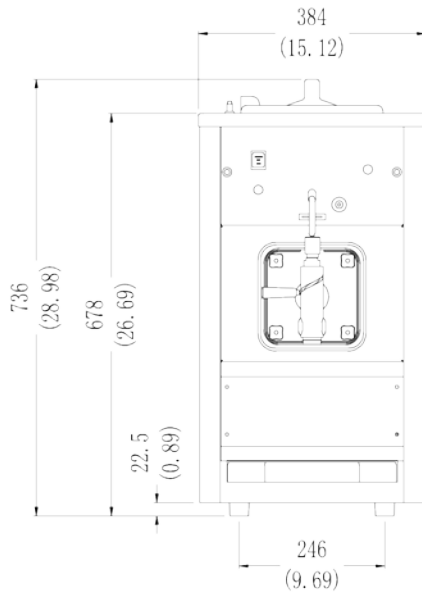

Weight	Kg/lb
Net	87 / 193
Shipping	98 / 218

Packaging Volume	0.30 CBM / 10.59 CBF
-------------------------	----------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	384 / 15.1	470 / 18.5
Depth	649 / 25.6	725 / 28.5
Height	736 / 29.0	890 / 35.0

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
110/60/1	20	15.0	2P/3W

Plug

L5-20

This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

Specifications

Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

Motor

One, 1/3HP

Refrigeration System

One Compressor: 4800 BTU/HR, R404A
(BTUs may vary depending on compressor used.)

Air Cooled

Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance.
The rear of the unit may be placed against a wall