

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Refrigerators and Freezers



FEATURES LIST

CSD-1DR-BAL-X, CSD-2DR-BAL-X
 CSD-3DR-BAL-X
 CSD-1DF-BAL-X, CSD-2DF-BAL-X
 CSD-3DF-BAL-X

- Stainless steel exterior, aluminum interior and back. Option of bright white aluminum interior available.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C) and freezers -8°F and 0°F (-22°C to -18°C).
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting, safety shielded.
- **WARRANTY:** 2 Years Parts and Labor and an additional 3 years on compressor.

* Not suitable for installation in a non-commercial or residential application

Approvals

Certified To ANSI/
NSF 7 Standards



Intertek


Intertek

ENERGY STAR

As continued product improvement is a policy, specifications are subject to change without notice

CONFORMS TO NSF/ANSI STD 7

PLAN VIEW

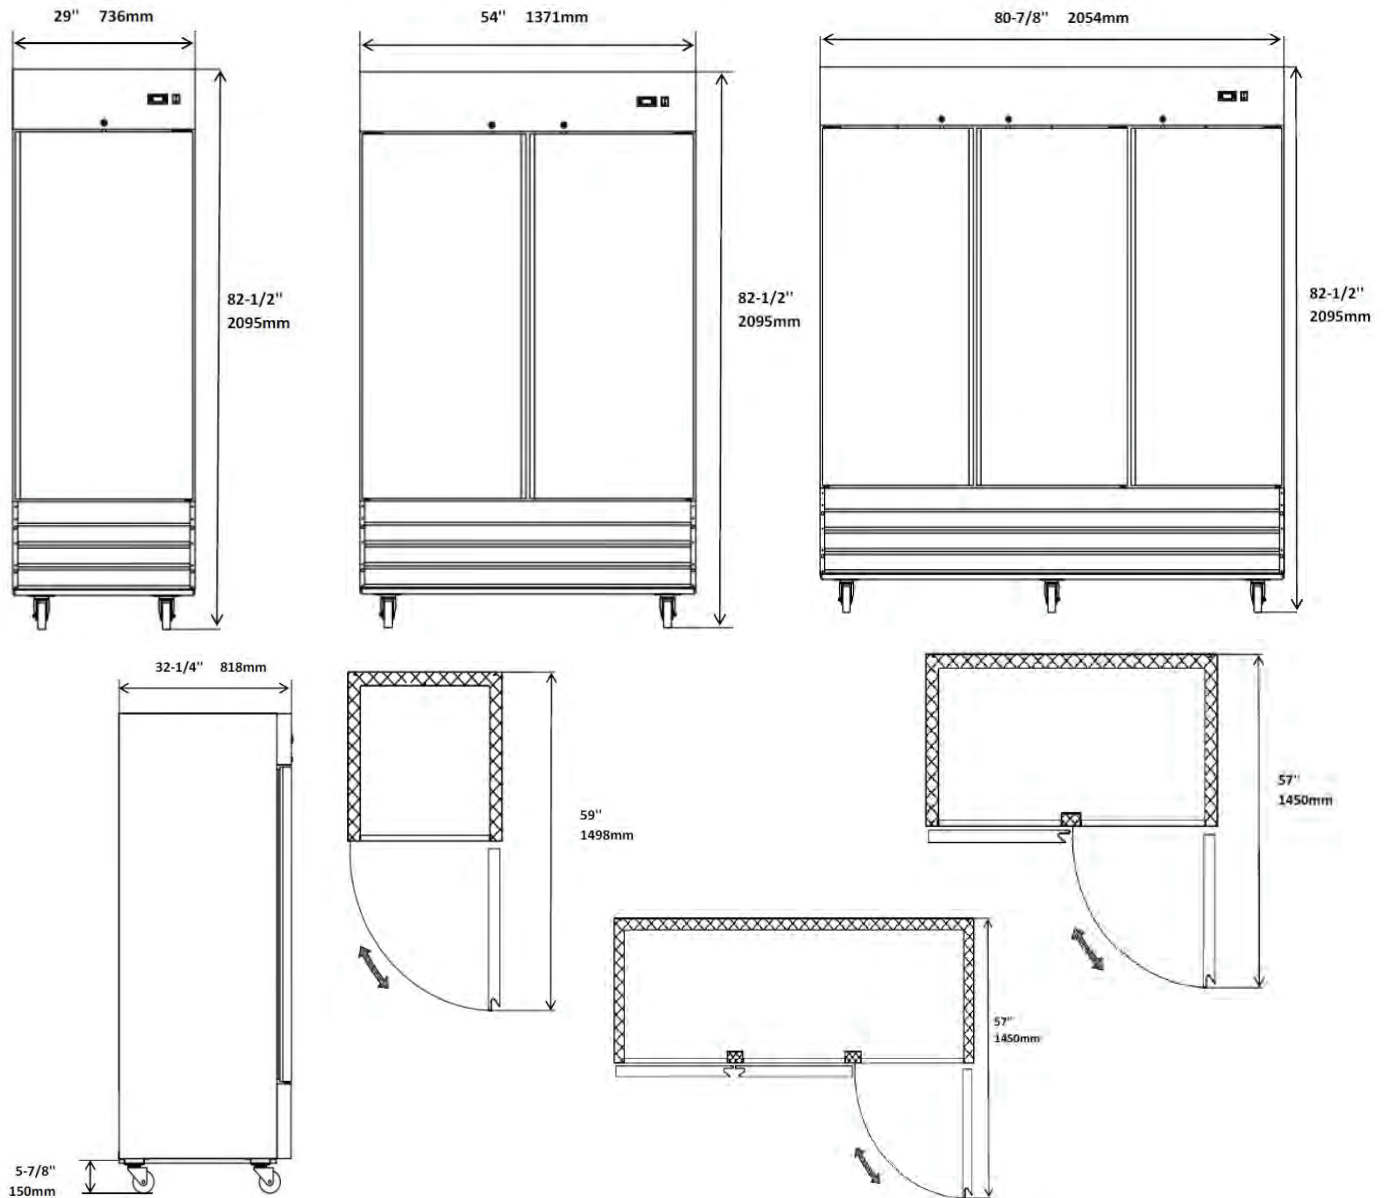

Model	Doors	Shelves	Cabinet Dim (in)			HP	Voltage	Amp	NEMA Plug	Cord Length (ft)	Crated Weight (lbs)
			W	D	H						
CSD-1DR-BAL-X	1	3	29	32.25	82.5	1/5	115/60/1	2.6	5-15P	10	337
CSD-2DR-BAL-X	2	6	54	32.25	82.5	1/4+	115/60/1	3.8	5-15P	10	513
CSD-3DR-BAL-X	3	9	80.8	32.25	82.5	3/4	115/60/1	9.0	5-15P	10	704
CSD-1DF-BAL-X	1	3	29	32.25	82.5	1/2+	115/60/1	7.1	5-15P	10	347
CSD-2DF-BAL-X	2	6	54	32.25	82.5	1	115/60/1	10.7	5-15P	10	559
CSD-3DF-BAL-X	3	9	81	32.25	82.5	1	115/60/1	13.3	5-20P	10	746