

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Undercounter Refrigerator



CUR-48

Centaur model _____ Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: White Aluminum back and top, ABS Plastic Sides – White Aluminum Door Liner. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Refrigeration is bottom mount condensing unit with capillary tube system, temperature range 34-38F. Refrigerant to be environmentally friendly with R134a. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. All doors stand open pass 90 degrees, self closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters be to factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. NSF-7 listed, UL-471

FEATURES LIST

- Solid state thermostat with digital display
- Stainless steel front & sides
- Self closing doors remain open past 90°
- Environmentally friendly R134A
- EZ slide out condenser
- Whisper quiet
- Solid construction
- Black inset handle
- Casters with two front brakes
- Cool air intake
- Zero clearance back and sides
- One piece stainless tabletop


** WARRANTY: 2 Years Parts and Labor and
Additional 3 Years on Compressor.*

Specifications subject to change without notice

Approvals:



PLAN VIEW

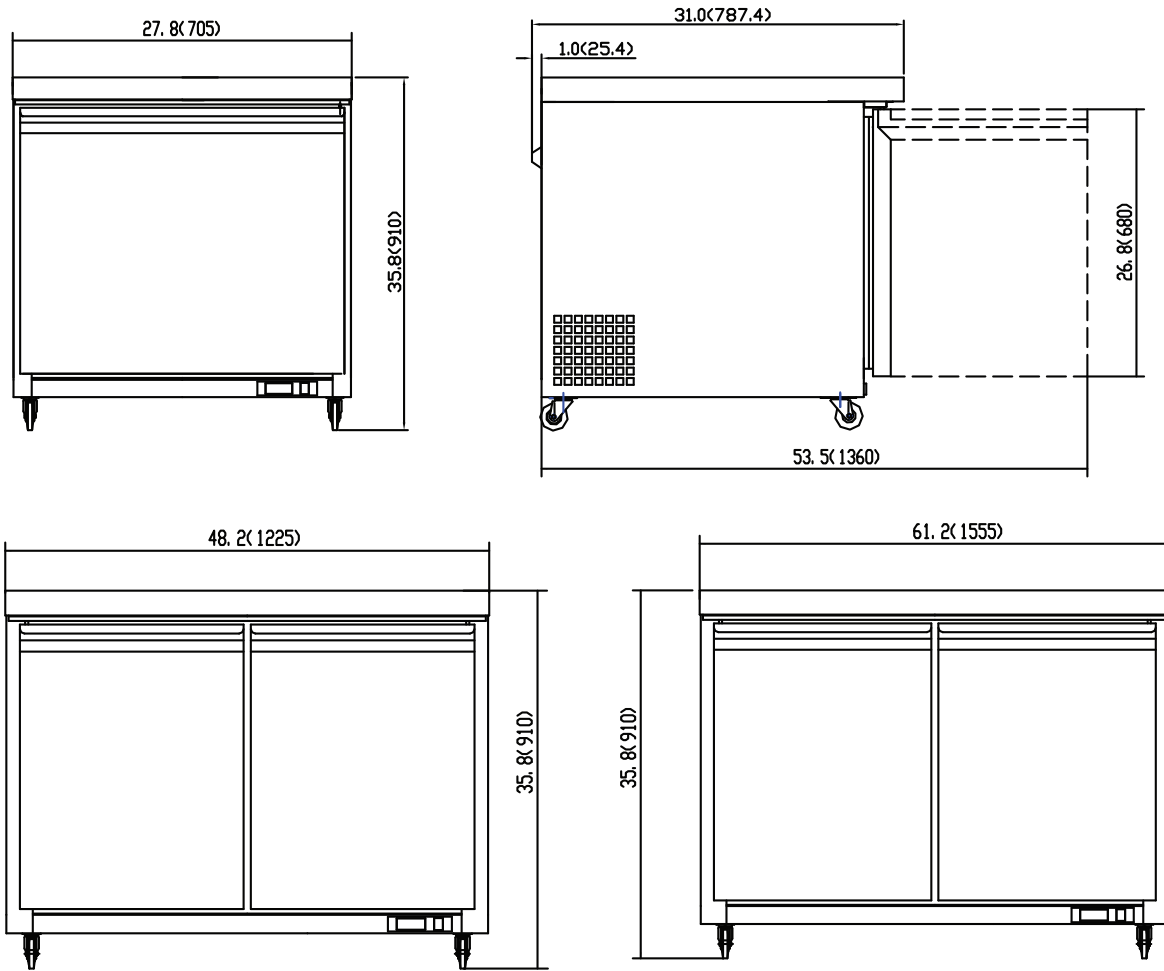

DIMENSIONAL DATA

CUR-28	CUR-48	CUR-60
Capacity: 1 door and 1 shelf, 6.5 cu.ft.	Capacity: 2 doors and 2 shelves, 12 cu.ft.	Capacity: 2 doors and 2 shelves, 15.5 cu.ft.
Dimensions: Overall Length = 27.8" Overall Depth = 31.0" Overall Height = 35.8"	Dimensions: Overall Length = 48.2" Overall Depth = 31.0" Overall Height = 35.8"	Dimensions: Overall Length = 61.2" Overall Depth = 31.0" Overall Height = 35.8"
HP: 3/8 Voltage: 115/60/1 Amps: 5 NEMA Plug: 5-15P Cord Length: 10	HP: 3/8 Voltage: 115/60/1 Amps: 5 NEMA Plug: 5-15P Cord Length: 10	HP: 3/8 Voltage: 115/60/1 Amps: 5 NEMA Plug: 5-15P Cord Length: 10
Shipping Information: Crated Weight: 190 lbs.	Shipping Information: Crated Weight: 280 lbs.	Shipping Information: Crated Weight: 330 lbs.