

These back-bar coolers are a great way to merchandise and store beer, soda, and other beverages in your bar or restaurant. Constructed with all-stainless-steel countertops, interior floors, and walls. These units also feature LED lighting and adjustable shelves. These units are available in both glass and solid swing door models. These models are ETL and NSF approved, and backed by a 1-year warranty on parts and labor, and a 5-year warranty on the compressor.

28" Standard Depth Back Bar Coolers

- 304 stainless steel top, interior walls and floor
- Durable black steel exterior
- R134a refrigerant ensures ideal operating temperatures
- Side-mounted compressor
- Foamed-in-place polyurethane high-density cell insulation throughout the entire cabinet
- Plastic-coated wire shelves
- Automatic defrosting
- 1-year warranty on parts and labor
- 5-year warranty on the compressor



VUBB2



VUBB3



VUBB4



Specifications


Model	Doors	Shelves	Product Capacity	Net Volume (Cubic Ft)	Compressor HP	Overall Dimensions WxDxH (inches)	Voltage	Watts	Amps	Gross Weight
VUBB2	2/Glass	4	Kegs: 2 Half Barrels 12 oz Cans: 88 6-pks 12 oz Bottles: 95 6-pks	19 Cu. ft.	1/3	59" x 27.75" x 36.25"	115V/60Hz	444W	6.2	285 lbs
VUBB3	2/Glass	4	Kegs: 3 Half Barrels 12 oz Cans: 112 6-pks 12 oz Bottles: 120 6-pks	23.3 Cu. ft.	1/3	69" x 27.75" x 36.25"	115V/60Hz	490W	6.8	365 lbs
VUBB4	3/Glass	6	Kegs: 4 Half Barrels 12 oz Cans: 152 6-pks 12 oz Bottles: 165 6-pks	32 Cu. ft.	1/3	90" x 27.75" x 36.25"	115V/60Hz	504W	7.5	405 lbs

Commercial Refrigeration


Back Bar Coolers - 28" Depth

Plan Views


VUBB2

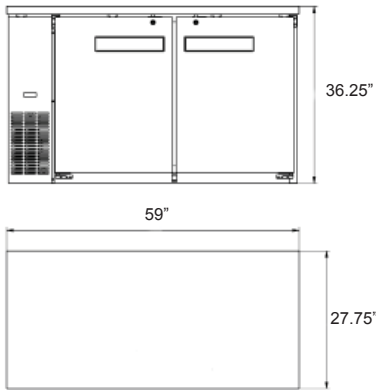

VUBB3

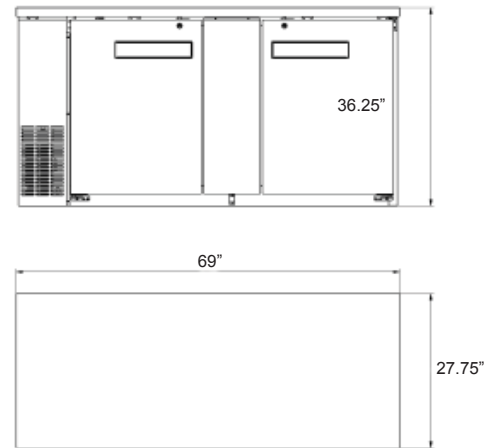

VUBB4

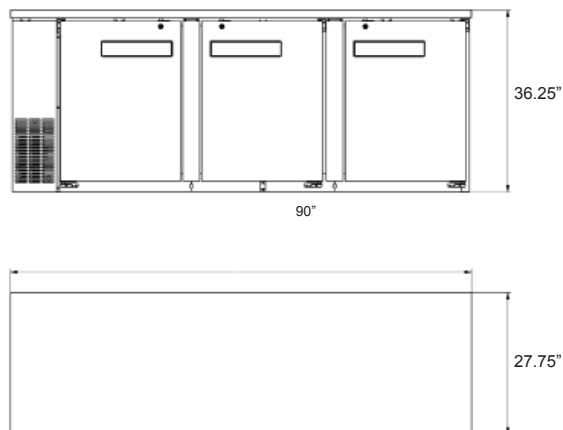

Features

Cooling System

- Use environmentally friendly R134a refrigerant
- Maintains a temperature range of 33° - 41°F
- Condensing unit is located behind front grill and slides out for easy cleaning

Cabinet Construction

- Exterior is constructed of a durable black vinyl front and sides with an aluminum back. Countertop is all stainless steel.
- Interior is constructed of all stainless steel floor and walls
- The cabinet is insulated throughout with a foamed-in-place, high-density cell polyurethane insulation

Shelving

- Heavy-duty, PVC-coated wire shelves are adjustable
- Aluminum shelf support system that are adjustable for every 1/2"

Electrical Control

- 115V/60 connection for all models
- 7-foot power cord with NEMA 5-15 plug from the back of the unit



Doors

- Swing door style available in either double-pane thermal glass or durable solid black vinyl doors
- 12"-long handles
- Positive-seal doors
- Door locks come standard on all models

Model Features

- Interior LED lighting for greater visibility throughout the cabinet
- NSF-7 approved for the storage of packaged or bottled products