

VC6E SERIES SINGLE DECK, DEEP DEPTH ELECTRIC CONVECTION OVENS

Item #



Model VC6ED
Shown with optional casters







SPECIFICATIONS

Single section, deep depth electric convection oven, Vulcan-Hart Model No. (VC6ED) (VC6EC). Stainless steel front, sides and top. Painted legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interior measures 29"w x 261/8"d x 20"h. Two interior oven lights. Five nickel plated oven racks per section measure 281/4" x 241/2". Eleven position nickel plated rack guides with positive rack stops. Heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed 1/2 H.P. oven blower-motor. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior Dimensions:

 $40\frac{1}{4}$ "w x $45\frac{1}{6}$ "d (includes motor & door handles) $41\frac{3}{4}$ "d (includes motor only) x $56\frac{3}{4}$ "h on $25\frac{3}{4}$ " legs.

NSF listed. UL listed. UL listed to Canadian safety standards.

□ **VC6ED** Solid state temperature controls adjust from 150° to 500°F. 60 minute timer with audible

alarm.

 $\hfill \hfill \hfill$

temperature readouts. 99-hour timer with audible alarm. Roast and Hold cycle.

One hundred programmable menu selection

One hundred programmable menu selections.

Shelf I.D. programming.

STANDARD FEATURES

- Stainless steel front, sides and top.
- Painted legs.
- Independently operated stainless steel doors with double pane windows.
- 12.5 total KW.
- ½ H.P. two speed oven blower-motor.
- Moisture vent damper control.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interior.
- Five nickel plated oven racks with eleven rack positions.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Complete prison package.
 - ☐ Security screws only.
- ☐ Stainless steel legs.
- ☐ Casters.
- ☐ Simultaneous chain driven doors.
- ☐ 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES

- ☐ Stainless steel rear motor enclosure.
- ☐ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.
- ☐ Stainless steel open stand with adjustable rack supports, stainless steel shelf and choice of adjustable feet or casters.
- $\hfill\square$ Down draft flue diverter for direct vent connection.






VC6E SERIES SINGLE DECK, DEEP DEPTH ELECTRIC CONVECTION OVENS


OPTIONAL VOLTAGES

- ☐ 480 volt, 60 Hz, 3 phase.
- ☐ 220/380 volt, 50 Hz, 1 phase, 3 wire.
- ☐ 220/380 volt, 50 Hz, 3 phase, 4 wire.
- ☐ 240/415 volt, 50 Hz, 3 phase, 4 wire.

CLEARANCES

	Compustible	Non-Compustit			
Rear	2"	2"			
Right Side	4"	4"			
Left Side	1"	1"			

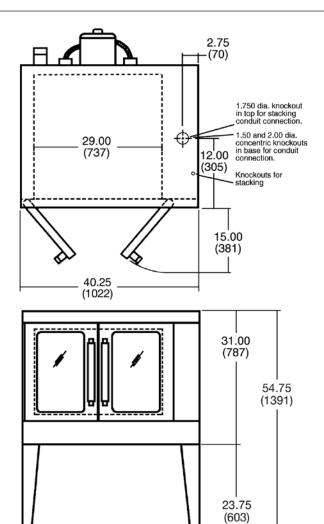



		3	PHAS	SE	NOMINAL AMPS PER LINE WIRE											WEIGHT			
		3 PHASE										WITH		WITHOUT					
MODEL	TOTAL CONN.	DUACE			20	8 VO	LT	240 VOLT			480 VOLT			1 PHASE		SKID & PACKAGING		SKID & PACKAGING	
NO.	KW	X-Y	Y-Z	X-Z	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z	208V	240V	LBS.	KG	LBS.	KG
VC6E	12.5	4	4	4.5	35	33	35	33	29	33	14	15	15	60	52	463	210	405	184



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

